

© Copyright SEK. Reproduction in any form without permission is prohibited.

## IT- och multimedia-utrustning – Del 1: Säkerhet

*Audio/video, information and communication technology equipment –  
Part 1: Safety requirements*

Som svensk standard gäller europastandarden EN 62368-1:2014. Den svenska standarden innehåller den officiella engelska språkversionen av EN 62368-1:2014.

### Nationellt förord

Europastandarden EN 62368-1:2014

består av:

- **europastandardens ikraftsättningsdokument**, utarbetat inom CENELEC
- **IEC 62368-1, Second edition, 2014 - Audio/video, information and communication technology equipment - Part 1: Safety requirements**

utarbetad inom International Electrotechnical Commission, IEC.

I bilaga ZB redovisas svenska avvikelser, vilka av CENELEC accepterats till följd av speciella nationella förhållanden.

---

ICS 33.160.01; 35.020.00

---

Denna standard är fastställd av SEK Svensk Elstandard, som också kan lämna upplysningar om **sakinnehållet** i standarden.  
Postadress: Box 1284, 164 29 KISTA  
Telefon: 08 - 444 14 00.  
E-post: sek@elstandard.se. Internet: www.elstandard.se

---

### *Standarder underlättar utvecklingen och höjer elsäkerheten*

Det finns många fördelar med att ha gemensamma tekniska regler för bl a mätning, säkerhet och provning och för utförande, skötsel och dokumentation av elprodukter och elanläggningar.

Genom att utforma sådana standarder blir säkerhetsfordringar tydliga och utvecklingskostnaderna rimliga samtidigt som marknadens acceptans för produkten eller tjänsten ökar.

Många standarder inom elområdet beskriver tekniska lösningar och metoder som åstadkommer den elsäkerhet som föreskrivs av svenska myndigheter och av EU.

### *SEK är Sveriges röst i standardiseringsarbetet inom elområdet*

SEK Svensk Elstandard svarar för standardiseringen inom elområdet i Sverige och samordnar svensk medverkan i internationell och europeisk standardisering. SEK är en ideell organisation med frivilligt deltagande från svenska myndigheter, företag och organisationer som vill medverka till och påverka utformningen av tekniska regler inom elektrotekniken.

SEK samordnar svenska intressenters medverkan i SEKs tekniska kommittéer och stödjer svenska experters medverkan i internationella och europeiska projekt.

### *Stora delar av arbetet sker internationellt*

Utformningen av standarder sker i allt väsentligt i internationellt och europeiskt samarbete. SEK är svensk nationalkommitté av International Electrotechnical Commission (IEC) och Comité Européen de Normalisation Electrotechnique (CENELEC).

Standardiseringsarbetet inom SEK är organiserat i referensgrupper bestående av ett antal tekniska kommittéer som speglar hur arbetet inom IEC och CENELEC är organiserat.

Arbetet i de tekniska kommittéerna är öppet för alla svenska organisationer, företag, institutioner, myndigheter och statliga verk. Den årliga avgiften för deltagandet och intäkter från försäljning finansierar SEKs standardiseringsverksamhet och medlemsavgift till IEC och CENELEC.

### *Var med och påverka!*

Den som deltar i SEKs tekniska kommittéarbete har möjlighet att påverka framtida standarder och får tidig tillgång till information och dokumentation om utvecklingen inom sitt teknikområde. Arbetet och kontakterna med kollegor, kunder och konkurrenter kan gynnsamt påverka enskilda företags affärsutveckling och bidrar till deltagarnas egen kompetensutveckling.

Du som vill dra nytta av dessa möjligheter är välkommen att kontakta SEKs kansli för mer information.

### **SEK Svensk Elstandard**

Box 1284  
164 29 Kista  
Tel 08-444 14 00  
[www.elstandard.se](http://www.elstandard.se)

ICS 33.160.01; 35.020

English Version

Audio/video, information and communication technology  
equipment - Part 1: Safety requirements  
(IEC 62368-1:2014 , modified)

Equipements des technologies de l'audio/vidéo, de  
l'information et de la communication - Partie 1: Exigences  
de sécurité  
(CEI 62368-1:2014 , modifiée)

Einrichtungen für Audio/Video, Informations- und  
Kommunikationstechnik - Teil 1: Sicherheitsanforderungen  
(IEC 62368-1:2014 , modifiziert)

This European Standard was approved by CENELEC on 2014-06-20. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization  
Comité Européen de Normalisation Electrotechnique  
Europäisches Komitee für Elektrotechnische Normung

**CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels**

## Foreword

The text of document 108/521/FDIS, future edition 2 of IEC 62368-1:2014, prepared by IEC/TC 108 "Safety of electronic equipment within the field of audio/video, information technology and communication technology" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 62368-1:2014.

A draft amendment, which covers common modifications to IEC 62368-1:2014, was prepared by CLC/TC 108X, "Safety of electronic equipment within the fields of Audio/Video, Information Technology and Communication Technology" and approved by CENELEC.

The following dates are fixed:

- latest date by which this document has to be implemented at (dop) 2015-06-20  
national level by publication of an identical  
national standard or by endorsement
- latest date by which the national standards conflicting with this (dow) 2019-06-20  
document have to be withdrawn

Clauses, subclauses, notes, tables, figures and annexes which are additional to those in IEC 62368-1:2014 are prefixed "Z".

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

This standard covers the Principle Elements of the Safety Objectives for Electrical Equipment Designed for Use within Certain Voltage Limits (LVD - 2006/95/EC).

Requirement of sound pressure for personal music player addressed by the mandate M/452 are covered in 10.6 "Safeguards against acoustic energy sources".

For equipment falling within the scope of directives other than those against which this standard is harmonized, additional requirements from those directives may apply.

### **Endorsement notice**

The text of the International Standard IEC 62368-1:2014 was approved by CENELEC as a European Standard with agreed common modifications.

## Annex ZA (normative)

### Normative references to international publications with their corresponding European publications

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
		Safety of Toys – Part 1: Mechanical and physical properties	EN 71-1	-
		Sound system equipment: Headphones and earphones associated with personal music players — Maximum sound pressure level measurement methodology— Part 1: General method for "one package equipment"	EN 50332-1	-
		Sound system equipment: Headphones and earphones associated with personal music players — Maximum sound pressure level measurement methodology— Part 2: Matching of sets with headphones if either or both are offered separately, or are offered as one package equipment but with standardised connectors between the two allowing to combine components of different manufacturers or different design	EN 50332-2	-
		Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz - 3 GHz)	EN 50360	-
-	-	Insulating, sheathing and covering materials for low-voltage energy cables	EN 50363	(all parts)
-	-	Electrical test methods for low voltage energy cables	EN 50395	2005
-	-	Non electrical test methods for low voltage energy cables	EN 50396	2005
		General requirements for Home and Building Electronic Systems (HBES) and Building Automation and Control Systems (BACS) -- Part 3: Electrical safety requirements.	EN 50491-3	2009
		Product standard to demonstrate compliance of radio frequency fields from handheld and body-mounted wireless communication devices used by the general public (30 MHz - 6 GHz)	EN 50566	-
IEC 60027-1	-	Letter symbols to be used in electrical technology – Part 1: General	EN 60027-1	-

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60065	-	Audio, video and similar electronic apparatus – Safety requirements	EN 60065	-
IEC 60068-2-6	-	Environmental testing Part 2-6: Tests – Test Fc: Vibration (sinusoidal)	EN 60068-2-6	-
IEC 60068-2-78	-	Environmental testing Part 2-78: Tests – Test Cab: Damp heat, steady state	EN 60068-2-78	-
IEC/TR 60083	-	Plugs and socket-outlets for domestic and similar general use standardised in member countries of IEC	-	-
IEC 60085	-	Electrical insulation – Thermal classification and designation	EN 60085	-
IEC 60086-4	-	Primary batteries – Part 4: Safety of lithium batteries	EN 60086-4	-
IEC 60107-1	1997	Methods of measurement on receivers for television broadcast transmissions – Part 1: General considerations - Measurements at radio and video frequencies	EN 60107-1	1997
IEC 60112	-	Method for the determination of the proof and the comparative tracking indices of solid insulating materials	EN 60112	-
IEC 60127	(all parts)	Miniature fuses	EN 60127	(all parts)
IEC 60227-1	-	Polyvinyl chloride insulated cables of rated voltages up to and including 450/750V – Part 1: General requirements	HD 21 <sup>1)</sup>	-
IEC 60227-2	2003	Polyvinyl chloride insulated cables of rated voltages up to and including 450/750V – Part 2: Test methods	HD 21 <sup>1)</sup>	-
IEC 60245-1	-	Rubber insulated cables – Rated voltages up to and including 450/750V – Part 1: General requirements	HD 22 <sup>2)</sup>	-
IEC 60309	(all parts)	Plugs, socket-outlets and couplers for industrial purposes	EN 60309	(all parts)
IEC 60317	(all parts)	Specifications for particular types of winding wires	EN 60317	(all parts)
IEC 60317-43	-	Part 43: Aromatic polyimide tape wrapped round copper wire, class 240	EN 60317-43	-
IEC 60320	(all parts)	Appliance couplers for household and similar general purposes	EN 60320	(all parts)

<sup>1)</sup> The HD 21 series is related to, but not directly equivalent with the IEC 60227 series. Also EN 50363, EN 50395 and EN 50396 are to be taken into account.

<sup>2)</sup> The HD 22 series is related to, but not directly equivalent with the IEC 60245 series. Also EN 50363, EN 50395 and EN 50396 are to be taken into account.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60320-1	-	Appliance couplers for household and similar general purposes – Part 1: General requirements	EN 60320-1	-
IEC 60320-2-2	-	Appliance couplers for household and similar general purposes – Part 2-2: Interconnection couplers for household and similar equipment	EN60320-2-2	-
IEC 60332-1-2	-	Tests on electric and optical fibre cables under fire conditions – Part 1-2: Test for vertical flame propagation for a single insulated wire or cable - Procedure for 1 kW pre-mixed flame	EN 60332-1-2	-
IEC 60332-1-3	-	Tests on electric and optical fibre cables under fire conditions – Part 1-3: Test for vertical flame propagation for a single insulated wire or cable - Procedure for determination of flaming droplets/particles	EN 60332-1-3	-
IEC 60332-2-2	-	Tests on electric and optical fibre cables under fire conditions – Part 2-2: Test for vertical flame propagation for a single small insulated wire or cable - Procedure for diffusion flame	EN 60332-2-2	-
IEC 60384-14	2005	Fixed capacitors for use in electronic equipment – Part 14: Sectional specification: Fixed capacitors for electromagnetic interference suppression and connection to the supply mains	EN 60384-14	2005
IEC 60417	Data-base	Graphical symbols for use on equipment	-	-
IEC 60529	-	Degrees of protection provided by enclosures (IP Code)	EN 60529	-
IEC 60664-1	2007	Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests	EN 60664-1	2007
IEC 60664-3	-	Insulation coordination for equipment within low-voltage systems – Part 3: Use of coating, potting or moulding for protection against pollution	EN 60664-3	-
IEC 60691	2002	Thermal-links - Requirements and application guide	EN 60691	2003
IEC 60695-10-2	-	Fire hazard testing – Part 10-2: Abnormal heat – Ball pressure test	EN 60695-10-2	-
IEC 60695-10-3	-	Fire hazard testing – Part 10-3: Abnormal heat – Mould stress relief distortion test	EN 60695-10-3	-
IEC 60695-11-5	2004	Fire hazard testing – Part 11-5: Test flames – Needle flame test methods – Apparatus, confirmatory test arrangement and guidance	EN 60695-11-5	2005



<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60695-11-10	-	Fire hazard testing – Part 11-10: Test flames – 50 W horizontal and vertical flame test methods	EN 60695-11-10-	-
IEC 60695-11-20	1999	Fire hazard testing – Part 11-20: Test flames – 500 W flame test methods	EN 60695-11-20	1999
IEC/TS 60695-11-21	-	Fire hazard testing – Part 11-21: Test flames – 500 W vertical flame test methods for tubular polymeric materials	-	-
IEC 60728-11 (mod)	2005	Cable networks for television signals, sound signals and interactive services – Part 11: Safety	EN 60728-11	2005
IEC 60730	(all parts)	Automatic electrical controls for household and similar use	EN 60730	(all parts)
IEC 60730-1 (mod)	2010	Automatic electrical controls for household and similar use – Part 1: General requirements	EN 60730-1	2011
IEC 60738-1 +A1	2006 2009	Thermistors – Directly heated positive temperature coefficient – Part 1: Generic specification	EN 60738-1 +A1	2006 2009
IEC 60747-5-5	2007	Semiconductor devices – Discrete devices Part 5-5: Optoelectronic devices – Photocouplers	EN 60747-5-5	2011
IEC 60825-1	2007	Safety of laser products – Part 1: Equipment classification and requirements	EN 60825-1	2007
IEC 60825-2	2004	Safety of laser products – Part 2: Safety of optical fibre communication systems (OFCS)	EN 60825-2	2004
IEC 60825-12	-	Safety of laser products – Part 12: Safety of free space optical communication systems used for transmission of information	EN 60825-12	-
IEC 60851-3	2009	Winding wires – Test methods – Part 3: Mechanical properties	EN 60851-3	2009
IEC 60851-5	2008	Winding wires – Test methods – Part 5: Electrical properties	EN 60851-5	2008
IEC 60851-6	1996	Winding wires – Test methods – Part 6: Thermal properties	EN 60851-6	1996
IEC 60896-11	-	Stationary lead-acid batteries – Part 11: Vented types – General requirements and methods of tests	EN 60896-11	-
IEC 60896-21	2004	Stationary lead-acid batteries – Part 21: Valve regulated types –Methods of test	EN 60896-21	2004
IEC 60896-22	-	Stationary lead-acid batteries – Part 22: Valve regulated types – Requirements	EN 60896-22	-

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60906-1	-	IEC System of plugs and socket-outlet for household and similar purposes – Part 1: Plugs and socket-outlets 16 A 250 V a.c.	-	-
IEC 60906-2	-	IEC System of plugs and socket-outlet for household and similar purposes – Part 2: Plugs and socket-outlets 15 A 125 V a.c.	-	-
IEC 60947-1	-	Low-voltage switchgear and controlgear – Part 1: General rules	EN 60947-1	-
IEC 60950-1 (mod)	2005	Information technology equipment – Safety – Part 1: General requirements	EN 60950-1	2006
IEC 60950-22	2005	Information technology equipment – Safety – Part 22: Equipment to be installed outdoors	EN 60950-22	2006
IEC 60950-23	-	Information technology equipment – Safety – Part 23: Large data storage equipment	EN 60950-23	-
IEC 60990	1999	Methods of measurement of touch current and protective conductor current	EN 60990	1999
IEC 60998-1	-	Connecting devices for low-voltage circuits for household and similar purposes – Part 1: General requirements	EN 60998-1	-
IEC 60999-1	-	Connecting devices – Electrical copper conductors – Safety requirements for screw-type and screwless-type clamping units – Part 1: General requirements and particular requirements for clamping units for conductors from 0,2 mm <sup>2</sup> up to 35 mm <sup>2</sup> (included)	EN 60999-1	-
IEC 60999-2	-	Connecting devices – Electrical copper conductors 470 – Safety requirements for screw-type and screwless-type clamping units – Part 2: Particular requirements for clamping units for conductors above 35 mm <sup>2</sup> up to 300 mm <sup>2</sup> (included)	EN 60999-2	-
IEC 61051-1		Varistors for use in electronic equipment – Part 1: Generic specification		
IEC 61051-2 A1	1991 2009	Varistors for use in electronic equipment – Part 2: Sectional specification for surge suppression varistors	-	-
IEC 61056-1	-	General purpose lead-acid batteries (valve-regulated types) – Part 1: General requirements, functional characteristics - Methods of test	EN 61056-1	-
IEC 61056-2	-	General purpose lead-acid batteries (valve-regulated types) – Part 2: Dimensions, terminals and marking	EN 61056-2	-
IEC 61058-1 (mod) +A1	2000 2001	Switches for appliances Part 1: General requirements	EN 61058-1	2002
+A2	2007		+A2	2008

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61140	2001	Protection against electric shock – Common aspects for installation and equipment	EN 61140	2002
IEC/TS 61201	2007	Use of conventional touch voltage limits – Application guide	-	-
IEC 61204-7	-	Low-voltage power supplies, d.c. output – Part 7: Safety requirements	EN 61204-7	-
IEC 61293	-	Marking of electrical equipment with ratings related to electrical supply – Safety requirements	EN 61293	-
IEC 61427	-	Secondary cells and batteries for Photovoltaic energy systems (PVES) – General requirements and methods of test	EN 61427	-
IEC/TS 61430	-	Secondary cells and batteries – Test methods for checking the performance of devices designed for reducing explosion hazards – Lead-acid starter batteries	-	-
IEC 61434	-	Secondary cells and batteries containing alkaline or other non-acid electrolytes – Guide to designation of current in alkaline secondary cell and battery standards	EN 61434	-
IEC 61558-1	2005	Safety of power transformers, power supplies, reactors and similar products – Part 1: General requirements and tests	EN 61558-1	2005
IEC 61558-2-16	-	Safety of power transformers, reactors, power supply units and similar products for voltages up to 1 100 V – Part 2-16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units	EN 61558-2-16	-
IEC 61643-11	-	Low-voltage surge protective devices – Part 11: Surge protective devices connected to low-voltage power systems – Requirements and test methods	-	-
IEC 61810-1	2008	Electromechanical elementary relays – Part 1: General and safety requirements	EN 61810-1	2008
IEC 61959	-	Secondary cells and batteries containing alkaline or other non-acid electrolytes – Mechanical tests for sealed portable secondary cells and batteries	EN 61959	-
IEC 61965	2003	Mechanical safety of cathode ray tubes	EN 61965	2003
IEC 61984	-	Connectors – Safety requirements and tests	EN 61984	-
IEC 62133	-	Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications	EN 62133	-
IEC 62281	-	Safety of primary and secondary lithium cells and batteries during transport	-	-

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 62471 (mod)	2006	Photobiological safety of lamps and lamp systems	EN 62471	2008
IEC/TR 62471-2	-	Photobiological safety of lamps and lamp systems – Part 2: Guidance on manufacturing requirements relating to non-laser optical radiation safety	-	-
IEC 62485-2	-	Safety requirements for secondary batteries and battery installations – Part 2: Stationary batteries	-	-
ISO 178	-	Plastics - Determination of flexural properties	EN ISO 178	-
ISO 179-1	-	Plastics - Determination of Charpy impact properties – Part 1: Non-instrumented impact test	EN ISO 179	-
ISO 180	-	Plastics - Determination of Izod impact strength	EN ISO 180	-
ISO 306	-	Plastics – Thermoplastic materials – Determination of Vicat softening temperatures (VST)	EN ISO 306	-
ISO 527	(all parts)	Plastics – Determination of tensile properties	EN ISO 527	(all parts)
ISO 871	-	Plastics – Determination of ignition temperature using a hot-air furnace	-	-
ISO 3864	(all parts)	Graphical symbols -- Safety colours and safety signs	-	-
ISO 3864-2	-	Graphical symbols – Safety colours and safety signs – Part 2: Design principles for product safety labels	-	-
ISO 4892-1	-	Plastics – Methods of exposure to laboratory light sources – Part 1: General guidance	EN ISO 4892-1	-
ISO 4892-2	2006	Plastics – Methods of exposure to laboratory light sources – Part 2: Xenon-arc lamps	EN ISO 4892-2	2006
ISO 4892-4	-	Plastics – Methods of exposure to laboratory light sources – Part 4: Open-flame carbon-arc lamps	-	-
ISO 7000	Data-base	Graphical symbols for use on equipment – Index and synopsis	-	-
ISO 7010	-	Graphical symbols – Safety colours and safety signs – Safety signs used in workplaces and public areas	EN ISO 7010	-
ISO 8256	-	Plastics - Determination of tensile-impact strength	EN ISO 8256	-
ISO 9772	-	Cellular plastics - Determination of horizontal burning characteristics of small specimens subjected to a small flame	-	-

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
ISO 9773	-	Plastics - Determination of burning behaviour of thin flexible vertical specimens in contact with a small-flame ignition source	EN ISO 9773	-

## CONTENTS

FOREWORD.....	19
INTRODUCTION.....	22
0 Principles of this product safety standard .....	22
0.1 Objective .....	22
0.2 Persons .....	22
0.2.1 General .....	22
0.2.2 Ordinary person.....	22
0.2.3 Instructed person.....	22
0.2.4 Skilled person.....	22
0.3 Model for pain and injury.....	22
0.4 Energy sources.....	23
0.5 Safeguards .....	24
0.5.1 General .....	24
0.5.2 Equipment safeguard.....	25
0.5.3 Installation safeguard .....	25
0.5.4 Personal safeguard.....	25
0.5.5 Behavioural safeguards .....	26
0.5.6 Safeguards during ordinary or instructed person service conditions .....	27
0.5.7 Equipment safeguards during skilled person service conditions .....	27
0.5.8 Examples of safeguard characteristics .....	27
0.6 Electrically-caused pain or injury (electric shock).....	28
0.6.1 Models for electrically-caused pain or injury .....	28
0.6.2 Models for protection against electrically-caused pain or injury.....	29
0.7 Electrically-caused fire.....	30
0.7.1 Models for electrically-caused fire.....	30
0.7.2 Models for protection against electrically-caused fire .....	31
0.8 Injury caused by hazardous substances .....	31
0.9 Mechanically-caused injury .....	32
0.10 Thermally-caused injury (skin burn) .....	32
0.10.1 Models for thermally-caused injury .....	32
0.10.2 Models for protection against thermally-caused pain or injury .....	33
0.11 Radiation-caused injury .....	34
1 Scope.....	36
2 Normative references .....	37
3 Terms, definitions and abbreviations .....	43
3.1 Energy source abbreviations.....	43
3.2 Other abbreviations .....	43
3.3 Terms and definitions.....	44
3.3.1 Circuit terms .....	46
3.3.2 Enclosure terms.....	46
3.3.3 Equipment terms .....	47
3.3.4 Flammability terms .....	47
3.3.5 Insulation.....	49
3.3.6 Miscellaneous.....	49

3.3.7	Operating and fault conditions .....	51
3.3.8	Persons .....	52
3.3.9	Potential ignition sources.....	52
3.3.10	Ratings .....	53
3.3.11	Safeguards .....	53
3.3.12	Spacings .....	55
3.3.13	Temperature controls.....	55
3.3.14	Voltages and currents.....	55
3.3.15	Classes of equipment with respect to protection from electric shock.....	56
3.3.16	Chemical terms.....	57
3.3.17	Batteries .....	57
4	General requirements .....	59
4.1	General.....	59
4.1.1	Application of requirements and acceptance of materials, components and subassemblies .....	59
4.1.2	Use of components .....	59
4.1.3	Equipment design and construction .....	59
4.1.4	Equipment installation .....	60
4.1.5	Constructions and components not specifically covered.....	60
4.1.6	Orientation during transport and use.....	60
4.1.7	Choice of criteria .....	60
4.1.8	Conductive liquids .....	60
4.1.9	Electrical measuring instruments .....	60
4.1.10	Temperature measurements .....	60
4.1.11	Steady state conditions.....	61
4.1.12	Hierarchy of safeguards.....	61
4.1.13	Examples mentioned in the standard .....	61
4.1.14	Tests on parts or samples separate from the end-product.....	61
4.1.15	Markings and instructions .....	61
4.2	Energy source classifications .....	61
4.2.1	Class 1 energy source .....	61
4.2.2	Class 2 energy source .....	62
4.2.3	Class 3 energy source .....	62
4.2.4	Energy source classification by declaration.....	62
4.3	Protection against energy sources .....	62
4.3.1	General .....	62
4.3.2	Safeguards for protection of an ordinary person .....	62
4.3.3	Safeguards for protection of an instructed person.....	64
4.3.4	Safeguards for protection of a skilled person .....	64
4.3.5	Safeguards in a restricted access area .....	65
4.4	Safeguards .....	66
4.4.1	Equivalent materials or components .....	66
4.4.2	Composition of a safeguard .....	66
4.4.3	Accessible parts of a safeguard .....	66
4.4.4	Safeguard robustness.....	66
4.5	Explosion.....	68
4.5.1	General .....	68
4.5.2	Requirements .....	68

4.6	Fixing of conductors.....	69
4.6.1	Requirements .....	69
4.6.2	Compliance criteria.....	69
4.7	Equipment for direct insertion into mains socket-outlets .....	69
4.7.1	General .....	69
4.7.2	Requirements .....	69
4.7.3	Compliance criteria.....	70
4.8	Products containing lithium coin / button cell batteries .....	70
4.8.1	General .....	70
4.8.2	Instructional safeguard .....	70
4.8.3	Construction .....	70
4.8.4	Tests .....	71
4.8.5	Compliance criteria.....	71
4.9	Likelihood of fire or shock due to entry of conductive objects .....	72
5	Electrically-caused injury.....	72
5.1	General.....	72
5.2	Classification and limits of electrical energy sources.....	73
5.2.1	Electrical energy source classifications.....	73
5.2.2	Electrical energy source ES1 and ES2 limits.....	73
5.3	Protection against electrical energy sources .....	79
5.3.1	General .....	79
5.3.2	Accessibility to electrical energy sources and safeguards.....	79
5.4	Insulation materials and requirements.....	81
5.4.1	General .....	81
5.4.2	Clearances .....	87
5.4.3	Creepage distances.....	97
5.4.4	Solid insulation .....	101
5.4.5	Antenna terminal insulation.....	110
5.4.6	Insulation of internal wire as a part of a supplementary safeguard .....	111
5.4.7	Tests for semiconductor components and for cemented joints .....	111
5.4.8	Humidity conditioning .....	111
5.4.9	Electric strength test.....	112
5.4.10	Safeguards against transient voltages from external circuits.....	115
5.4.11	Separation between external circuits and earth.....	117
5.5	Components as safeguards.....	118
5.5.1	General .....	118
5.5.2	Capacitors and RC units .....	118
5.5.3	Transformers .....	120
5.5.4	Optocouplers .....	120
5.5.5	Relays .....	120
5.5.6	Resistors .....	120
5.5.7	SPDs.....	120
5.5.8	Insulation between the mains and an external circuit consisting of a coaxial cable .....	121
5.6	Protective conductor .....	121
5.6.1	General .....	121
5.6.2	Requirements for protective conductors .....	121
5.6.3	Requirements for protective earthing conductors .....	122



	5.6.4	Requirements for protective bonding conductors .....	123
	5.6.5	Terminals for protective conductors .....	125
	5.6.6	Resistance of the protective bonding system .....	126
	5.6.7	Reliable earthing .....	128
5.7		Prospective touch voltage, touch current and protective conductor current.....	128
	5.7.1	General .....	128
	5.7.2	Measuring devices and networks .....	128
	5.7.3	Equipment set-up, supply connections and earth connections.....	128
	5.7.4	Earthed accessible conductive parts .....	129
	5.7.5	Protective conductor current.....	129
	5.7.6	Prospective touch voltage and touch current due to external circuits.....	130
	5.7.7	Summation of touch currents from external circuits.....	131
6		Electrically-caused fire .....	133
	6.1	General.....	133
	6.2	Classification of power sources (PS) and potential ignition sources (PIS) .....	133
	6.2.1	General .....	133
	6.2.2	Power source circuit classifications .....	133
	6.2.3	Classification of potential ignition sources .....	136
	6.3	Safeguards against fire under normal operating conditions and abnormal operating conditions.....	137
	6.3.1	Requirements .....	137
	6.3.2	Compliance criteria.....	138
	6.4	Safeguards against fire under single fault conditions.....	138
	6.4.1	General .....	138
	6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits.....	138
	6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 circuits and PS3 circuits .....	138
	6.4.4	Control of fire spread in PS1 circuits.....	140
	6.4.5	Control of fire spread in PS2 circuits.....	140
	6.4.6	Control of fire spread in a PS3 circuit .....	141
	6.4.7	Separation of combustible materials from a PIS.....	142
	6.4.8	Fire enclosures and fire barriers .....	144
	6.5	Internal and external wiring.....	149
	6.5.1	Requirements .....	149
	6.5.2	Compliance criteria.....	149
	6.5.3	Requirements for interconnection to building wiring. ....	149
	6.5.4	Compliance criteria.....	150
	6.6	Safeguards against fire due to the connection of additional equipment.....	150
7		Injury caused by hazardous substances .....	150
	7.1	General.....	150
	7.2	Reduction of exposure to hazardous substances.....	150
	7.3	Ozone exposure.....	150
	7.4	Use of personal safeguards (PPE) .....	150
	7.5	Use of instructional safeguards and instructions .....	151
	7.6	Batteries and their protection circuits .....	151
8		Mechanically-caused injury.....	151
	8.1	General.....	151

8.2	Mechanical energy source classifications.....	151
8.2.1	General classification .....	151
8.2.2	MS1.....	153
8.2.3	MS2.....	153
8.2.4	MS3.....	153
8.3	Safeguards against mechanical energy sources.....	153
8.4	Safeguards against parts with sharp edges and corners .....	153
8.4.1	Requirements .....	153
8.4.2	Compliance criteria.....	154
8.5	Safeguards against moving parts .....	154
8.5.1	Requirements .....	154
8.5.2	Instructional safeguard requirements .....	154
8.5.3	Compliance criteria.....	155
8.5.4	Special categories of equipment comprising moving parts .....	155
8.5.5	High pressure lamps.....	157
8.6	Stability of equipment .....	158
8.6.1	Requirements .....	158
8.6.2	Static stability .....	159
8.6.3	Relocation stability test.....	160
8.6.4	Glass slide test.....	160
8.6.5	Horizontal force test and compliance criteria.....	161
8.7	Equipment mounted to a wall or ceiling .....	161
8.7.1	Requirements .....	161
8.7.2	Test methods.....	161
8.7.3	Compliance criteria.....	163
8.8	Handle strength .....	163
8.8.1	General .....	163
8.8.2	Test method and compliance criteria .....	163
8.9	Wheels or casters attachment requirements.....	163
8.9.1	General .....	163
8.9.2	Test method .....	164
8.10	Carts, stands, and similar carriers.....	164
8.10.1	General .....	164
8.10.2	Marking and instructions .....	164
8.10.3	Cart, stand or carrier loading test and compliance criteria.....	165
8.10.4	Cart, stand or carrier impact test.....	165
8.10.5	Mechanical stability .....	165
8.10.6	Thermoplastic temperature stability .....	166
8.11	Mounting means for rack mounted equipment .....	166
8.11.1	General .....	166
8.11.2	Requirements .....	166
8.11.3	Mechanical strength test.....	167
8.11.4	Mechanical strength test, 250 N, including end stops.....	167
8.11.5	Compliance criteria.....	167
8.12	Telescoping or rod antennas.....	167
9	Thermal burn injury .....	168
9.1	General.....	168
9.2	Thermal energy source classifications.....	168
9.2.1	General .....	168

9.2.2	TS1 .....	168
9.2.3	TS2 .....	168
9.2.4	TS3 .....	168
9.2.5	Test method and compliance criteria .....	168
9.2.6	Touch temperature levels .....	169
9.3	Safeguards against thermal energy sources .....	170
9.4	Requirements for safeguards .....	170
9.4.1	Equipment safeguard .....	170
9.4.2	Instructional safeguard .....	170
10	Radiation .....	170
10.1	General .....	170
10.2	Radiation energy source classifications .....	170
10.2.1	General classification .....	170
10.2.2	RS1 .....	172
10.2.3	RS2 .....	172
10.2.4	RS3 .....	172
10.3	Safeguards against laser radiation .....	172
10.3.1	Requirements .....	172
10.3.2	Compliance criteria .....	172
10.4	Safeguards against visible, infra-red, and ultra-violet radiation .....	173
10.4.1	General .....	173
10.4.2	Instructional safeguard .....	173
10.4.3	Compliance criteria .....	174
10.5	Safeguards against x-radiation .....	174
10.5.1	Requirements .....	174
10.5.2	Compliance criteria .....	174
10.5.3	Test method .....	174
10.6	Safeguards against acoustic energy sources .....	175
10.6.1	General .....	175
10.6.2	Classification .....	176
10.6.3	Measurement methods .....	176
10.6.4	Protection of persons .....	177
10.6.5	Requirements for listening devices (headphones, earphones, etc.) .....	177
Annex A (informative) Examples of equipment within the scope of this standard .....		179
Annex B (normative) Normal operating condition tests, abnormal operating condition tests and single fault condition tests .....		180
B.1	General .....	180
B.1.1	Introduction .....	180
B.1.2	Test applicability .....	180
B.1.3	Type of test .....	180
B.1.4	Test samples .....	180
B.1.5	Compliance by inspection of relevant data .....	180
B.1.6	Temperature measurement conditions .....	180
B.2	Normal operating conditions .....	181
B.2.1	General .....	181
B.2.2	Supply frequency .....	181
B.2.3	Supply voltage .....	181
B.2.4	Normal operating voltages .....	182

B.2.5	Input test .....	182
B.2.6	Operating temperature measurement conditions .....	183
B.2.7	Battery charging and discharging under normal operating conditions .....	183
B.3	Simulated abnormal operating conditions .....	184
B.3.1	General .....	184
B.3.2	Covering of ventilation openings .....	184
B.3.3	DC mains polarity test .....	185
B.3.4	Setting of voltage selector .....	185
B.3.5	Maximum load at output terminals .....	185
B.3.6	Reverse battery polarity .....	185
B.3.7	Audio amplifier abnormal operating conditions .....	185
B.3.8	Compliance criteria during and after abnormal operating conditions .....	185
B.4	Simulated single fault conditions .....	185
B.4.1	General .....	185
B.4.2	Temperature controlling device .....	186
B.4.3	Motor tests .....	186
B.4.4	Functional insulation .....	186
B.4.5	Short-circuit and interruption of electrodes in tubes and semiconductors .....	187
B.4.6	Short-circuit or disconnection of passive components .....	187
B.4.7	Continuous operation of components .....	187
B.4.8	Compliance criteria during and after single fault conditions .....	188
B.4.9	Battery charging and discharging under single fault conditions .....	188
Annex C (normative)	UV radiation .....	189
C.1	Protection of materials in equipment from UV radiation .....	189
C.1.1	General .....	189
C.1.2	Requirements .....	189
C.1.3	Test method and compliance criteria .....	189
C.2	UV light conditioning test .....	190
C.2.1	Test apparatus .....	190
C.2.2	Mounting of test samples .....	190
C.2.3	Carbon-arc light-exposure test .....	190
C.2.4	Xenon-arc light-exposure test .....	190
Annex D (normative)	Test generators .....	191
D.1	Impulse test generators .....	191
D.2	Antenna interface test generator .....	192
D.3	Electronic pulse generator .....	192
Annex E (normative)	Test conditions for equipment containing audio amplifiers .....	193
E.1	Audio amplifier normal operating conditions .....	193
E.2	Audio amplifier abnormal operating conditions .....	194
Annex F (normative)	Equipment markings, instructions, and instructional safeguards .....	195
F.1	General .....	195
F.2	Letter symbols and graphical symbols .....	195
F.2.1	Letter symbols .....	195
F.2.2	Graphical symbols .....	195
F.2.3	Compliance criteria .....	195
F.3	Equipment markings .....	195

F.3.1	Equipment marking locations .....	195
F.3.2	Equipment identification markings .....	196
F.3.3	Equipment rating markings .....	196
F.3.4	Voltage setting device .....	198
F.3.5	Markings on terminals and operating devices.....	198
F.3.6	Equipment markings related to equipment classification .....	199
F.3.7	Equipment IP rating marking.....	200
F.3.8	External power supply output marking .....	200
F.3.9	Durability, legibility and permanence of markings .....	201
F.3.10	Test for the permanence of markings .....	201
F.4	Instructions .....	201
F.5	Instructional safeguards .....	202
Annex G (normative)	Components .....	205
G.1	Switches .....	205
G.1.1	General .....	205
G.1.2	Requirements .....	205
G.1.3	Test method and compliance criteria .....	206
G.2	Relays .....	206
G.2.1	Requirements .....	206
G.2.2	Overload test.....	207
G.2.3	Relay controlling connectors supplying power to other equipment.....	207
G.2.4	Test method and compliance criteria .....	207
G.3	Protective devices.....	207
G.3.1	Thermal cut-offs .....	207
G.3.2	Thermal links .....	208
G.3.3	PTC thermistors.....	209
G.3.4	Overcurrent protective devices .....	210
G.3.5	Safeguard components not mentioned in G.3.1 to G.3.4 .....	210
G.4	Connectors .....	210
G.4.1	Clearance and creepage distance requirements .....	210
G.4.2	Mains connectors .....	210
G.4.3	Connectors other than mains connectors .....	211
G.5	Wound components .....	211
G.5.1	Wire insulation in wound components .....	211
G.5.2	Endurance test .....	211
G.5.3	Transformers .....	213
G.5.4	Motors .....	216
G.6	Wire insulation .....	220
G.6.1	General .....	220
G.6.2	Solvent-based enamel winding insulation.....	221
G.7	Mains supply cords .....	221
G.7.1	General .....	221
G.7.2	Cross sectional area .....	222
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords .....	224
G.7.4	Cord entry .....	225
G.7.5	Non-detachable cord bend protection .....	225
G.7.6	Supply wiring space.....	226

G.8	Varistors .....	227
	G.8.1 General .....	227
	G.8.2 Safeguards against electric shock .....	227
	G.8.3 Safeguards against fire .....	228
G.9	Integrated circuit (IC) current limiters .....	230
	G.9.1 Requirements .....	230
	G.9.2 Test program 1 .....	230
	G.9.3 Test program 2 .....	231
	G.9.4 Test program 3 .....	231
	G.9.5 Compliance criteria .....	232
G.10	Resistors .....	232
	G.10.1 General .....	232
	G.10.2 Resistor test .....	232
	G.10.3 Resistors serving as safeguards between the mains and an external circuit consisting of a coaxial cable .....	232
G.11	Capacitors and RC units .....	233
	G.11.1 General .....	233
	G.11.2 Conditioning of capacitors and RC units .....	233
	G.11.3 Rules for selecting capacitors .....	233
	G.11.4 Examples of the application of capacitors .....	234
G.12	Optocouplers .....	237
G.13	Printed boards .....	237
	G.13.1 General .....	237
	G.13.2 Uncoated printed boards .....	237
	G.13.3 Coated printed boards .....	237
	G.13.4 Insulation between conductors on the same inner surface .....	239
	G.13.5 Insulation between conductors on different surfaces .....	240
	G.13.6 Tests on coated printed boards .....	240
G.14	Coatings on component terminals .....	242
	G.14.1 Requirements .....	242
	G.14.2 Test method and compliance criteria .....	242
G.15	Pressurized liquid filled components .....	243
	G.15.1 General .....	243
	G.15.2 Requirements .....	243
	G.15.3 Test methods and compliance criteria .....	243
	G.15.4 Compliance criteria .....	244
G.16	IC including capacitor discharge function (ICX) .....	244
	G.16.1 Requirements .....	244
	G.16.2 Tests .....	245
	G.16.3 Compliance criteria .....	245
Annex H (normative)	Criteria for telephone ringing signals .....	246
	H.1 General .....	246
	H.2 Method A .....	246
	H.3 Method B .....	249
	H.3.1 Ringing signal .....	249
	H.3.2 Tripping device and monitoring voltage .....	249
Annex I (informative)	Overvoltage categories (see IEC 60364-4-44) .....	251
Annex J (normative)	Insulated winding wires for use without interleaved insulation .....	252
	J.1 General .....	252

J.2	Type tests .....	252
J.2.1	General .....	252
J.2.2	Electric strength .....	252
J.2.3	Flexibility and adherence .....	253
J.2.4	Heat shock .....	253
J.2.5	Retention of electric strength after bending.....	254
J.3	Testing during manufacturing .....	254
J.3.1	General .....	254
J.3.2	Routine test .....	254
J.3.3	Sampling test.....	254
Annex K (normative)	Safety interlocks .....	255
K.1	General.....	255
K.1.1	General requirements .....	255
K.1.2	Test method and compliance criteria .....	255
K.2	Components of the safety interlock safeguard mechanism .....	256
K.3	Inadvertent change of operating mode .....	256
K.4	Interlock safeguard override.....	256
K.5	Fail-safe .....	256
K.5.1	Requirement.....	256
K.5.2	Test method and compliance criteria .....	256
K.6	Mechanically operated safety interlocks .....	257
K.6.1	Endurance requirement .....	257
K.6.2	Test method and compliance criteria .....	257
K.7	Interlock circuit isolation .....	257
K.7.1	Separation distances for contact gaps and interlock circuit elements.....	257
K.7.2	Overload test.....	257
K.7.3	Endurance test .....	258
K.7.4	Electric strength test.....	258
Annex L (normative)	Disconnect devices.....	259
L.1	General requirements .....	259
L.2	Permanently connected equipment .....	259
L.3	Parts that remain energized .....	259
L.4	Single-phase equipment.....	259
L.5	Three-phase equipment .....	260
L.6	Switches as disconnect devices .....	260
L.7	Plugs as disconnect devices .....	260
L.8	Multiple power sources .....	260
L.9	Compliance criteria .....	261
Annex M (normative)	Equipment containing batteries and their protection circuits.....	262
M.1	General requirements .....	262
M.2	Safety of batteries and their cells .....	262
M.2.1	Requirements .....	262
M.2.2	Compliance criteria.....	262
M.3	Protection circuits for batteries provided within the equipment .....	263
M.3.1	Requirements .....	263
M.3.2	Test method .....	263
M.3.3	Compliance criteria.....	264

M.4	Additional safeguards for equipment containing a secondary lithium battery .....	264
M.4.1	General .....	264
M.4.2	Charging safeguards .....	264
M.4.3	Fire enclosure.....	265
M.4.4	Drop test of equipment containing a secondary lithium battery.....	266
M.5	Risk of burn due to short-circuit during carrying .....	267
M.5.1	Requirements .....	267
M.5.2	Test method and compliance criteria .....	267
M.6	Prevention of short-circuits and protection from other effects of electric current .....	267
M.6.1	Short-circuits .....	267
M.6.2	Leakage currents.....	268
M.7	Risk of explosion from lead acid and NiCd batteries.....	268
M.7.1	Ventilation preventing an explosive gas concentration .....	268
M.7.2	Test method and compliance criteria .....	268
M.8	Protection against internal ignition from external spark sources of batteries with aqueous electrolyte .....	270
M.8.1	General .....	270
M.8.2	Test method .....	270
M.9	Preventing electrolyte spillage .....	273
M.9.1	Protection from electrolyte spillage .....	273
M.9.2	Tray for preventing electrolyte spillage .....	273
M.10	Instructions to prevent reasonably foreseeable misuse .....	273
Annex N (normative)	Electrochemical potentials (V).....	274
Annex O (normative)	Measurement of creepage distances and clearances .....	275
Annex P (normative)	Safeguards against conductive objects .....	283
P.1	General.....	283
P.2	Safeguards against entry or consequences of entry of a foreign object .....	283
P.2.1	General .....	283
P.2.2	Safeguards against entry of a foreign object .....	283
P.2.3	Safeguards against the consequences of entry of a foreign object .....	284
P.3	Safeguards against spillage of internal liquids.....	286
P.3.1	General .....	286
P.3.2	Determination of spillage consequences .....	286
P.3.3	Spillage safeguards .....	286
P.3.4	Compliance criteria.....	287
P.4	Metallized coatings and adhesives securing parts .....	287
P.4.1	General .....	287
P.4.2	Tests .....	287
Annex Q (normative)	Circuits intended for interconnection with building wiring .....	290
Q.1	Limited power source .....	290
Q.1.1	Requirements .....	290
Q.1.2	Test method and compliance criteria .....	290
Q.2	Test for external circuits – paired conductor cable .....	291
Annex R (normative)	Limited short-circuit test.....	292
R.1	General.....	292
R.2	Test setup.....	292



R.3	Test method.....	292
R.4	Compliance criteria .....	293
Annex S (normative)	Tests for resistance to heat and fire .....	294
S.1	Flammability test for fire enclosure and fire barrier materials of equipment where the steady-state power does not exceed 4 000 W .....	294
S.2	Flammability test for fire enclosure and fire barrier integrity .....	295
S.3	Flammability tests for the bottom of a fire enclosure .....	296
S.3.1	Mounting of samples.....	296
S.3.2	Test method and compliance criteria .....	296
S.4	Flammability classification of materials .....	296
S.5	Flammability test for fire enclosure materials of equipment with a steady-state power exceeding 4 000 W .....	297
Annex T (normative)	Mechanical strength tests.....	299
T.1	General.....	299
T.2	Steady force test, 10 N .....	299
T.3	Steady force test, 30 N .....	299
T.4	Steady force test, 100 N .....	299
T.5	Steady force test, 250 N .....	299
T.6	Enclosure impact test.....	299
T.7	Drop test.....	300
T.8	Stress relief test.....	300
T.9	Impact test.....	301
T.10	Glass fragmentation test .....	301
T.11	Test for telescoping or rod antennas .....	302
Annex U (normative)	Mechanical strength of CRTs and protection against the effects of implosion.....	303
U.1	General.....	303
U.2	Test method and compliance criteria for non-intrinsically protected CRTs .....	304
U.3	Protective screen .....	304
Annex V (normative)	Determination of accessible parts .....	305
V.1	Accessible parts of equipment .....	305
V.1.1	General .....	305
V.1.2	Test method 1 – Surfaces and openings tested with jointed test probes .....	305
V.1.3	Test method 2 – Openings tested with straight unjointed test probes .....	305
V.1.4	Test method 3 – Plugs, jacks, connectors .....	308
V.1.5	Test method 4 – Slot openings .....	309
V.1.6	Test method 5 – Terminals intended to be used by an ordinary person .....	309
V.2	Accessible part criterion.....	310
Annex W (informative)	Comparison of terms introduced in this standard .....	311
W.1	General.....	311
W.2	Comparison of terms.....	311
Bibliography.....		324
Figure 1 – Three block model for pain and injury.....		23
Figure 2 – Three block model for safety .....		24
Figure 3 – Schematic and model for electrically-caused pain or injury.....		29

Figure 4 – Model for protection against electrically-caused pain or injury .....	29
Figure 5 – Model for electrically-caused fire .....	30
Figure 6 – Models for protection against fire .....	31
Figure 7 – Schematic and model for thermally-caused injury .....	33
Figure 8 – Model for protection against thermally-caused injury .....	34
Figure 9 – Model for protection of an ordinary person against a class 1 energy source .....	62
Figure 10 – Model for protection of an ordinary person against a class 2 energy source .....	63
Figure 11 – Model for protection of an ordinary person against a class 2 energy source during ordinary person servicing conditions .....	63
Figure 12 – Model for protection of an ordinary person against a class 3 energy source .....	63
Figure 13 – Model for protection of an instructed person against a class 1 energy source .....	64
Figure 14 – Model for protection of an instructed person against a class 2 energy source .....	64
Figure 15 – Model for protection of an instructed person against a class 3 energy source .....	64
Figure 16 – Model for protection of a skilled person against a class 1 energy source .....	65
Figure 17 – Model for protection of a skilled person against a class 2 energy source .....	65
Figure 18 – Model for protection of a skilled person against a class 3 energy source .....	65
Figure 19 – Model for protection of a skilled person against class 3 energy sources during equipment servicing conditions .....	65
Figure 20 – Test hook .....	72
Figure 21 – Illustration showing ES limits for voltage and current .....	74
Figure 22 – Maximum values for combined a.c. current and d.c. current .....	76
Figure 23 – Maximum values for combined a.c. voltage and d.c. voltage .....	76
Figure 24 – Contact requirements to bare internal conductive parts .....	80
Figure 25 – Mandrel .....	105
Figure 26 – Initial position of mandrel .....	106
Figure 27 – Final position of mandrel .....	106
Figure 28 – Position of metal foil on insulating material .....	106
Figure 29 – Example of electric strength test instrument for solid insulation .....	114
Figure 30 – Application points of test voltage .....	115
Figure 31 – Test for separation between an external circuit and earth .....	118
Figure 32 – Test circuit for touch current of single-phase equipment .....	131
Figure 33 – Test circuit for touch current of three-phase equipment .....	131
Figure 34 – Power measurement for worst-case fault .....	134
Figure 35 – Power measurement for worst-case power source fault .....	135
Figure 36 – Illustration of power source classification .....	136
Figure 37 – Minimum separation requirements from an arcing PIS .....	142
Figure 38 – Extended separation requirements from a PIS .....	142
Figure 39 – Rotated separation requirements due to forced air flow .....	143
Figure 40 – Deflected separation requirements from a PIS when a fire barrier is used .....	144
Figure 41 – Top openings .....	146
Figure 42 – Bottom openings .....	147
Figure 43 – Limits for moving fan blades made of non-plastic materials .....	152

Figure 44 – Limits for moving fan blades made of plastic materials .....	152
Figure D.1 – 1,2/50 $\mu$ s and 10/700 $\mu$ s voltage impulse generator .....	191
Figure D.2 – Antenna interface test generator circuit .....	192
Figure D.3 – Example of an electronic pulse generator .....	192
Figure E.1 – Band-pass filter for wide-band noise measurement .....	194
Figure F.1 – Example of an instructional safeguard.....	203
Figure G.1 – Determination of arithmetic average temperature .....	215
Figure G.2 – Thermal ageing time.....	241
Figure G.3 – Abrasion resistance test for coating layers .....	242
Figure H.1 – Definition of ringing period and cadence cycle .....	247
Figure H.2 – $I_{TS1}$ limit curve for cadenced ringing signal .....	248
Figure H.3 – Peak and peak-to-peak currents .....	248
Figure H.4 – Ringing voltage trip criteria .....	250
Figure M.1 – Distance $d$ as a function of the rated capacity for various charge currents $I$ (mA/Ah).....	272
Figure O.1 – Narrow groove.....	275
Figure O.2 – Wide groove .....	275
Figure O.3 – V-shaped groove .....	276
Figure O.4 – Intervening unconnected conductive part.....	276
Figure O.5 – Rib .....	276
Figure O.6 – Uncemented joint with narrow groove .....	276
Figure O.7 – Uncemented joint with wide groove .....	277
Figure O.8 – Uncemented joint with narrow and wide grooves .....	277
Figure O.9 – Narrow recess .....	278
Figure O.10 – Wide recess .....	278
Figure O.11– Coating around terminals.....	278
Figure O.12 – Coating over printed wiring .....	279
Figure O.13 – Example of measurements in an enclosure of insulating material.....	279
Figure O.14 – Cemented joints in multi-layer printed boards .....	280
Figure O.15 – Device filled with insulating compound .....	280
Figure O.16 – Partitioned bobbin .....	280
Figure O.17 – Materials with different CTI values.....	281
Figure O.18 – Materials with different CTI values having an air gap of less than $X$ mm .....	281
Figure O.19 – Materials with different CTI values having an air groove of less than $X$ mm .....	282
Figure O.20 – Materials with different CTI values having an air groove not smaller than $X$ mm .....	282
Figure P.1 – Examples of cross-sections of designs of top openings which prevent vertical entry.....	284
Figure P.2 – Examples of cross-sections of designs of side opening louvres which prevent vertical entry .....	284
Figure P.3 – Internal volume locus for foreign object entry.....	285
Figure T.1 – Impact test using sphere .....	300
Figure V.1 – Jointed test probe for equipment likely to be accessible to children.....	306
Figure V.2 – Jointed test probe for equipment not likely to be accessible to children.....	307

Figure V.3 – Blunt probe .....	308
Figure V.4 – Wedge probe .....	309
Figure V.5 – Terminal probe .....	310
Table 1 – Response to energy class .....	23
Table 2 – Examples of body response or property damage related to energy sources .....	24
Table 3 – Examples of safeguard characteristics .....	28
Table 4 – Electrical energy source limits for steady-state ES1 and ES2 .....	75
Table 5 – Electrical energy source limits for a charged capacitor .....	77
Table 6 – Voltage limits for single pulses .....	78
Table 7 – Current limits for single pulses .....	78
Table 8 – Electrical energy source limits for repetitive pulses .....	79
Table 9 – Minimum air gap distance .....	80
Table 10 – Temperature limits for materials, components and systems .....	83
Table 11 – Minimum clearances for voltages with frequencies up to 30 kHz .....	89
Table 12 – Minimum clearances for voltages with frequencies above 30 kHz .....	90
Table 13 – Mains transient voltages .....	91
Table 14 – External circuit transient voltages .....	93
Table 15 – Minimum clearances using required withstand voltage .....	95
Table 16 – Electric strength test voltages .....	96
Table 17 – Multiplication factors for clearances and test voltages .....	96
Table 18 – Minimum creepage distances for basic insulation and supplementary insulation in mm .....	100
Table 19 – Minimum values of creepage distances (in mm) for frequencies higher than 30 kHz and up to 400 kHz .....	101
Table 20 – Tests for insulation in non-separable layers .....	104
Table 21 – Electric field strength $E_P$ for some commonly used materials .....	108
Table 22 – Reduction factors for the value of breakdown electric field strength $E_P$ at higher frequencies .....	109
Table 23 – Reduction factors for the value of breakdown electric field strength $E_P$ at higher frequencies for thin materials .....	109
Table 24 – Values for insulation resistance .....	110
Table 25 – Distance through insulation of internal wiring .....	111
Table 26 – Test voltages for electric strength tests based on transient voltages .....	113
Table 27 – Test voltages for electric strength tests based on peak working voltages .....	113
Table 28 – Test voltages for electric strength tests based on temporary overvoltages .....	114
Table 29 – Test values for electric strength tests .....	116
Table 30 – Protective earthing conductor sizes for reinforced safeguards for permanently connected equipment .....	123
Table 31 – Minimum protective bonding conductor size of copper conductors .....	124
Table 32 – Sizes of terminals for protective conductors .....	126
Table 33 – Test duration, mains connected equipment .....	127
Table 34 – Size and spacing of holes in metal bottoms of fire enclosures .....	148
Table 35 – Classification for various categories of mechanical energy sources .....	151
Table 36 – Overview of requirements and tests .....	158

Table 37 – Torque to be applied to screws.....	162
Table 38 – Touch temperature limits for accessible parts.....	169
Table 39 – Radiation energy source classifications.....	171
Table C.1 – Minimum property retention limits after UV exposure.....	189
Table D.1 – Component values for Figure D.1 and Figure D.2.....	192
Table E.1 – Audio signal electrical energy source classes and safeguards.....	194
Table F.1 – Instructional safeguard element description and examples.....	203
Table F.2 – Examples of markings, instructions, and instructional safeguards.....	204
Table G.1 – Peak surge current.....	206
Table G.2 – Test temperature and testing time (days) per cycle.....	212
Table G.3 – Temperature limits for transformer windings and for motor windings (except for the motor running overload test).....	215
Table G.4 – Temperature limits for running overload tests.....	217
Table G.5 – Sizes of conductors.....	223
Table G.6– Strain relief test force.....	224
Table G.7 – Varistor overload and temporary overvoltage test.....	228
Table G.8 – Capacitor ratings according to IEC 60384-14.....	234
Table G.9 – Examples of the application of Y capacitors based on the test voltages of Table 26.....	235
Table G.10 – Examples of the application of Y capacitors based on the test voltages of Table 27.....	236
Table G.11 – Examples of the application of Y capacitors based on the test voltages of Table 28.....	236
Table G.12 – Examples of the application of X capacitors, line to line or line to neutral.....	237
Table G.13 – Minimum separation distances for coated printed boards.....	239
Table G.14 – Insulation in printed boards.....	240
Table I.1 – Overvoltage categories.....	251
Table J.1 – Mandrel diameter.....	253
Table J.2 – Oven temperature.....	254
Table M.1 – Values of $f_g$ and $f_s$ .....	269
Table O.1 – Value of $X$ .....	275
Table Q.1 – Limits for inherently limited power sources.....	290
Table Q.2 – Limits for power sources not inherently limited (overcurrent protective device required).....	291
Table S.1 – Foamed materials.....	297
Table S.2 – Rigid materials.....	297
Table S.3 – Very thin materials.....	297
Table T.1 – Impact force.....	301
Table T.2 – Torque values for end-piece test.....	302
Table W.1 – Comparison of terms and definitions in IEC 60664-1:2007 and IEC 62368-1.....	311
Table W.2 – Comparison of terms and definitions in IEC 61140:2001 and IEC 62368-1.....	313
Table W.3 – Comparison of terms and definitions in IEC 60950-1:2005 and IEC 62368-1.....	316
Table W.4 – Comparison of terms and definitions in IEC 60728-11 and IEC 62368-1.....	319

Table W.5 – Comparison of terms and definitions in IEC 62151 and IEC 62368-1 ..... 320  
Table W.6 – Comparison of terms and definitions in IEC 60065 and IEC 62368-1 ..... 321

# INTERNATIONAL ELECTROTECHNICAL COMMISSION

---

## AUDIO/VIDEO, INFORMATION AND COMMUNICATION TECHNOLOGY EQUIPMENT –

### Part 1: Safety requirements

#### FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62368-1 has been prepared by TC 108: Safety of electronic equipment within the field of audio/video, information technology and communication technology.

This second edition cancels and replaces the first edition published in 2010. It constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- addition of requirements for LEDs;
- new requirements for wall and ceiling mounting means;
- addition of acoustic shock requirements for personal music players;
- revision of the battery requirements, including new requirements for coin / button cell batteries;
- revision of the burn requirements.

The text of this standard is based on the following documents:

FDIS	Report on voting
108/521/FDIS	108/531/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62368 series, published under the general title *Audio/video, information and communication technology equipment*, can be found on the IEC website.

The “in some countries” notes regarding differing national practices are contained in the following subclauses:

0.2.1, 1, 4.1.15, 4.7.3, 5.2.2.2, 5.4.2.3.2.4, 5.4.2.5, 5.4.5.1, 5.5.2.1, 5.5.6, 5.6.4.2, 5.7.5, 5.7.6.1, 10.5.3, 10.6.2.1, F.3.3.6, Table 13, Table 14 and Table 39.

In this standard, the following print types or formats are used:

- requirements proper and normative annexes: in roman type;
- compliance statements and test specifications: *in italic type*;
- notes/explanatory matter: in smaller roman type;
- normative conditions within tables: in smaller roman type;
- terms that are defined in 3.3: **bold**.

In figures and tables, if colour is available:

- green colour denotes a class 1 energy source;
- yellow colour denotes a class 2 energy source;
- red colour denotes a class 3 energy source.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

NOTE 1 The attention of National Committees is drawn to the fact that equipment manufacturers and testing organizations may need a transitional period following publication of a new, amended or revised IEC publication in which to make products in accordance with the new requirements and to equip themselves for conducting new or revised tests. It is the recommendation of the committee that the content of this publication be adopted for mandatory implementation nationally not earlier than five years from the date of publication of this standard.



NOTE 2 IEC 62368-1 is based on the principles of hazard based safety engineering, which is a different way of developing and specifying safety considerations than that of the current practice. While this standard is different from traditional IEC safety standards in its approach and while it is believed that IEC 62368-1 provides a number of advantages, its introduction and evolution is not intended to result in significant changes to the existing safety philosophy that led to the development of the safety requirements contained in IEC 60065 and IEC 60950-1. The predominant reason behind the creation of IEC 62368-1 is to simplify the problems created by the merging of the technologies of ITE and CE. The techniques used are novel so that a learning process is required and experience is needed in its application. Consequently, the committee recommends that this edition of the standard be considered as an alternative to IEC 60065 or IEC 60950-1 at least over the recommended transition period.

NOTE 3 Explanatory information related to IEC 62368-1 is contained in IEC/TR 62368-2. It provides rationale together with explanatory information related to this standard.

**IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

## INTRODUCTION

### 0 Principles of this product safety standard

#### 0.1 Objective

This part of IEC 62368 is a product safety standard that classifies energy sources, prescribes **safeguards** against those energy sources, and provides guidance on the application of, and requirements for, those **safeguards**.

The prescribed **safeguards** are intended to reduce the likelihood of pain, injury and, in the case of fire, property damage.

The objective of the INTRODUCTION is to help designers to understand the underlying principles of safety in order to design safe equipment. These principles are informative and not an alternative to the detailed requirements of this standard.

#### 0.2 Persons

##### 0.2.1 General

This standard describes **safeguards** for the protection of three kinds of persons: the **ordinary person**, the **instructed person**, and the **skilled person**. This standard assumes that a person will not intentionally create conditions or situations that could cause pain or injury.

NOTE In Australia, the work conducted by an **instructed person** or **skilled person** may require formal licensing from regulatory authorities.

##### 0.2.2 Ordinary person

**Ordinary person** is the term applied to all persons other than **instructed persons** and **skilled persons**. **Ordinary persons** include not only users of the equipment, but also all persons who may have access to the equipment or who may be in the vicinity of the equipment. Under **normal operating conditions** or **abnormal operating conditions**, **ordinary persons** should not be exposed to parts comprising energy sources capable of causing pain or injury. Under a **single fault condition**, **ordinary persons** should not be exposed to parts comprising energy sources capable of causing injury.

##### 0.2.3 Instructed person

**Instructed person** is a term applied to persons who have been instructed and trained by a **skilled person**, or who are supervised by a **skilled person**, to identify energy sources that may cause pain (see Table 1) and to take precautions to avoid unintentional contact with or exposure to those energy sources. Under **normal operating conditions**, **abnormal operating conditions** or **single fault conditions**, **instructed persons** should not be exposed to parts comprising energy sources capable of causing injury.


##### 0.2.4 Skilled person

**Skilled person** is a term applied to persons who have training or experience in the equipment technology, particularly in knowing the various energies and energy magnitudes used in the equipment. **Skilled persons** are expected to use their training and experience to recognize energy sources capable of causing pain or injury and to take action for protection from injury from those energies. **Skilled persons** should also be protected against unintentional contact or exposure to energy sources capable of causing injury.

#### 0.3 Model for pain and injury

An energy source that causes pain or injury does so through the transfer of some form of energy to or from a body part.

This concept is represented by a three-block model (see Figure 1).

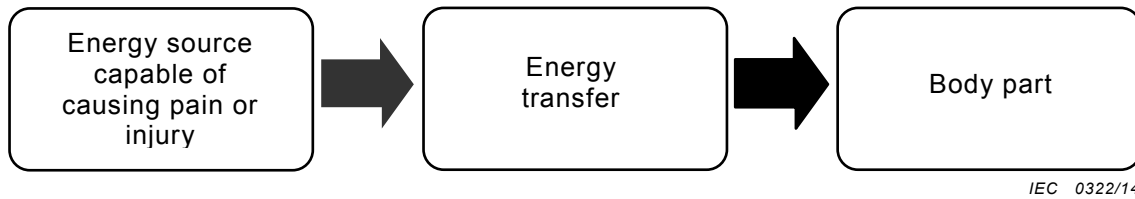

**Figure 1 – Three block model for pain and injury**

This safety standard specifies three classes of energy sources defined by magnitudes and durations of source parameters relative to either the body or to **combustible material** responses to those energy sources. Each energy class (see 4.2) is a function of the body part or the **combustible material** susceptibility to that energy magnitude (see Table 1).

**Table 1 – Response to energy class**

Energy source	Effect on the body	Effect on combustible materials
Class 1	Not painful, but may be detectable	Ignition not likely
Class 2	Painful, but not an injury	Ignition possible, but limited growth and spread of fire
Class 3	Injury	Ignition likely, rapid growth and spread of fire

The energy threshold for pain or injury is not constant throughout the population. For example, for some energy sources, the threshold is a function of body mass; the lower the mass, the lower the threshold, and vice-versa. Other body variables include age, state of health, state of emotions, effect of drugs, skin characteristics, etc. Furthermore, even where outward appearances otherwise appear equal, individuals differ in their thresholds of susceptibility to the same energy source.

The effect of duration of energy transfer is a function of the specific energy form. For example, pain or injury from thermal energy can be very short (1 s) for high skin temperature, or very long (several hours) for low skin temperature.

Furthermore, the pain or injury may occur some considerable time after the transfer of energy to a body part. For example, pain or injury from some chemical or physiological reaction may not be manifested for days, weeks, months, or years.

#### 0.4 Energy sources

Energy sources are addressed by this standard, together with the pain or injury that results from a transfer of that energy to the body, and the likelihood of property damage that results from fire escaping the equipment.

An electrical product is connected to an electrical energy source (for example, the **mains**), an external power supply, or a **battery**. An electrical product uses the electrical energy to perform its intended functions.

In the process of using electrical energy, the product transforms the electrical energy into other forms of energy (for example, thermal energy, kinetic energy, optical energy, audio energy, electromagnetic energy, etc.). Some energy transformations may be a deliberate part of the product function (for example, moving parts of a printer, images on a visual display unit, sound from a speaker, etc.). Some energy transformations may be a by-product of the product function (for example, heat dissipated by functional circuits, x-radiation from a cathode-ray tube, etc.).

Some products may use energy sources that are non-electrical energy sources such as **batteries**, moving parts, or chemicals, etc. The energy in these other sources may be transferred to or from a body part, or may be transformed into other energy forms (for example, a **battery** transforms chemical energy into electrical energy, or a moving body part transfers its kinetic energy to a sharp edge).

Examples of the types of energy forms and the associated injuries and property damage addressed in this standard are in Table 2.

**Table 2 – Examples of body response or property damage related to energy sources**

Forms of energy	Examples of body response or property damage	Clause
Electrical energy (for example, energized conductive parts)	Pain, fibrillation, cardiac arrest, respiratory arrest, skin burn, or internal organ burn	5
Thermal energy (for example, electrical ignition and spread of fire)	Electrically-caused fire leading to burn-related pain or injury, or property damage	6
Chemical reaction (for example, electrolyte, poison)	Skin damage, organ damage, or poisoning	7
Kinetic energy (for example, moving parts of equipment, or a moving body part against an equipment part)	Laceration, puncture, abrasion, contusion, crush, amputation, or loss of a limb, eye, ear, etc.	8
Thermal energy (for example, hot <b>accessible</b> parts)	Skin burn	9
Radiated energy (for example, electromagnetic energy, optical energy, acoustic energy)	Loss of sight, skin burn, or loss of hearing	10

**0.5 Safeguards**

**0.5.1 General**

Many products necessarily use energy capable of causing pain or injury. Product design cannot eliminate such energy use. Consequently, such products should use a scheme that reduces the likelihood of such energy being transferred to a body part. The scheme that reduces the likelihood of energy transfer to a body part is a **safeguard** (see Figure 2).



IEC 0323/14

**Figure 2 – Three block model for safety**

A **safeguard** is a device or scheme or system that

- is interposed between an energy source capable of causing pain or injury and a body part, and
- reduces the likelihood of transfer of energy capable of causing pain or injury to a body part.

NOTE **Safeguard** mechanisms against transfer of energy capable of causing pain or injury include:

- attenuating the energy (reduces the value of the energy); or
- impeding the energy (slows the rate of energy transfer); or
- diverting the energy (changes the energy direction); or
- disconnecting, interrupting, or disabling the energy source; or
- enveloping the energy source (reduces the likelihood of the energy from escaping); or
- interposing a barrier between a body part and the energy source.

A **safeguard** can be applied to the equipment, to the local installation, to a person or can be a learned or directed behaviour (for example, resulting from an **instructional safeguard**) intended to reduce the likelihood of transfer of energy capable of causing pain or injury. A **safeguard** may be a single element or may be a set of elements.

Generally, the order of preference for providing **safeguards** is:

- **equipment safeguards** are always useful, since they do not require any knowledge or actions by persons coming into contact with the equipment;
- **installation safeguards** are useful when a safety characteristic can only be provided after installation (for example, the equipment has to be bolted to the floor to provide stability);
- behavioural **safeguards** are useful when the equipment requires an energy source to be **accessible**.

In practice, **safeguard** selection accounts for the nature of the energy source, the intended user, the functional requirements of the equipment, and similar considerations.

### 0.5.2 Equipment safeguard

An **equipment safeguard** may be a **basic safeguard**, a **supplementary safeguard**, a **double safeguard**, or a **reinforced safeguard**.

### 0.5.3 Installation safeguard

**Installation safeguards** are not controlled by the equipment manufacturer, although in some cases, **installation safeguards** may be specified in the equipment installation instructions.

Generally, with respect to equipment, an **installation safeguard** is a **supplementary safeguard**.

NOTE For example, the protective earthing **supplementary safeguard** is located partly in the equipment and partly in the installation. The protective earthing **supplementary safeguard** is not effective until the equipment is connected to the installation.

Requirements for **installation safeguards** are not addressed in this standard. However, this standard does assume some **installation safeguards**, such as protective earthing, are in place and are effective.

### 0.5.4 Personal safeguard

A **personal safeguard** may be a **basic safeguard**, a **supplementary safeguard**, or a **reinforced safeguard**.

Requirements for **personal safeguards** are not addressed in this standard. However, this standard does assume that **personal safeguards** are available for use as specified by the manufacturer.

## 0.5.5 Behavioural safeguards

### 0.5.5.1 Introduction to behavioural safeguards

In the absence of an equipment, installation, or **personal safeguard**, a person may use a specific behaviour as a **safeguard** to avoid energy transfer and consequent injury. A behavioural **safeguard** is a voluntary or instructed behaviour intended to reduce the likelihood of transfer of energy to a body part.

Three kinds of behavioural **safeguards** are specified in this standard. Each kind of behavioural **safeguard** is associated with a specific kind of person. An **instructional safeguard** is usually addressed to an **ordinary person**, but may also be addressed to an **instructed person** or a **skilled person**. A **precautionary safeguard** is used by an **instructed person**. A **skill safeguard** is used by a **skilled person**.

### 0.5.5.2 Instructional safeguard

An **instructional safeguard** is a means of providing information, describing the existence and location of an energy source capable of causing pain or injury, and is intended to invoke a specific behaviour on the part of a person to reduce the likelihood of transfer of energy to a body part (see Annex F).

An **instructional safeguard** may be a visual indicator (symbols or words or both) or an audible message, as applicable to the expected use of the product.

When accessing locations where the equipment needs to be energized to perform a service activity, an **instructional safeguard** may be considered acceptable protection to bypass an **equipment safeguard** such that the person is made aware of how to avoid contact with a class 2 or class 3 energy source.

If **equipment safeguards** would interfere with or prohibit the equipment function, an **instructional safeguard** may replace an **equipment safeguard**.

If exposure to an energy source capable of causing pain or injury is essential to the correct functioning of equipment, an **instructional safeguard** may be used to ensure protection of persons instead of another **safeguard**. Consideration should be given as to whether the **instructional safeguard** should require the use of a **personal safeguard**.

Provision of an **instructional safeguard** does not result in an **ordinary person** becoming an **instructed person** (see 0.5.5.3).

### 0.5.5.3 Precautionary safeguard (used by an instructed person)

A **precautionary safeguard** is the training and experience or supervision of an **instructed person** by a **skilled person** to use precautions to protect the **instructed person** against class 2 energy sources. **Precautionary safeguards** are not specifically prescribed in this standard but are assumed to be effective when the term **instructed person** is used.

During equipment servicing, an **instructed person** may need to remove or defeat an **equipment safeguard**. In this case, an **instructed person** is expected to then apply precaution as a **safeguard** to avoid injury.

### 0.5.5.4 Skill safeguard (used by a skilled person)

A **skill safeguard** is the education, training, knowledge and experience of the **skilled person** that is used to protect the **skilled person** against class 2 or class 3 energy sources. **Skill safeguards** are not specifically prescribed in this standard but are assumed to be effective when the term **skilled person** is used.

During equipment servicing, a **skilled person** may need to remove or defeat an **equipment safeguard**. In this case, a **skilled person** is expected to then apply skill as a **safeguard** to avoid injury.

#### **0.5.6 Safeguards during ordinary or instructed person service conditions**

During **ordinary person** or **instructed person** service conditions, **safeguards** for such persons may be necessary. Such **safeguards** can be **equipment safeguards**, **personal safeguards**, or **instructional safeguards**.

#### **0.5.7 Equipment safeguards during skilled person service conditions**

During **skilled person** service conditions, **equipment safeguards** should be provided to protect against the effects of a body's involuntary reaction (for example, startle) that might cause unintentional contact with a class 3 energy source located outside the view of the **skilled person**.

NOTE This **safeguard** typically applies in large equipment, where the **skilled person** needs to partially or wholly enter between two or more class 3 energy source locations while servicing.

#### **0.5.8 Examples of safeguard characteristics**

Table 3 lists some examples of **safeguard** characteristics.

**Table 3 – Examples of safeguard characteristics**

<b>Safeguard</b>	<b>Basic safeguard</b>	<b>Supplementary safeguard</b>	<b>Reinforced safeguard</b>
<b>Equipment safeguard:</b> a physical part of an equipment	Effective under <b>normal operating conditions</b>	Effective in the event of failure of the <b>basic safeguard</b>	Effective under <b>normal operating conditions</b> and in the event of a <b>single fault condition</b> elsewhere in the equipment
	Example: <b>basic insulation</b>	Example: <b>supplementary insulation</b>	Example: <b>reinforced insulation</b>
	Example: normal temperatures below ignition temperatures	Example: <b>fire enclosure</b>	Not applicable
<b>Installation safeguard:</b> a physical part of a man-made installation	Effective under <b>normal operating conditions</b>	Effective in the event of failure of an equipment <b>basic safeguard</b>	Effective under <b>normal operating conditions</b> and in the event of a <b>single fault condition</b> elsewhere in the equipment
	Example: wire size	Example: overcurrent protective device	Example: socket outlet
<b>Personal safeguard:</b> a physical device worn on the body	In the absence of any <b>equipment safeguard</b> , effective under <b>normal operating conditions</b>	Effective in the event of failure of an equipment <b>basic safeguard</b>	In the absence of any <b>equipment safeguard</b> , effective under <b>normal operating conditions</b> and in the event of a <b>single fault condition</b> elsewhere in the equipment
	Example: gloves	Example: insulating floor mat	Example: electrically-insulated glove for handling live conductors
<b>Instructional safeguard:</b> a voluntary or instructed behaviour intended to reduce the likelihood of transfer of energy to a body part	In the absence of any <b>equipment safeguard</b> , effective under <b>normal operating conditions</b>	Effective in the event of failure of an equipment <b>basic safeguard</b>	Only effective on an exceptional basis, when providing all appropriate <b>safeguards</b> would prevent the intended functioning of the equipment
	Example: <b>instructional safeguard</b> to disconnect telecommunication cable before opening the cover	Example: after opening a door, an <b>instructional safeguard</b> against hot parts	Example: <b>instructional safeguard</b> of hot parts in an office photocopier, or a continuous roll paper cutter on a commercial printer

**0.6 Electrically-caused pain or injury (electric shock)**



**0.6.1 Models for electrically-caused pain or injury**

Electrically-caused pain or injury may occur when electrical energy capable of causing pain or injury is transferred to a body part (see Figure 3).



Electrical energy transfer occurs when there are two or more electrical contacts to the body:

- the first electrical contact is between a body part and a conductive part of the equipment;
- the second electrical contact is between another body part; and
  - earth, or
  - another conductive part of the equipment.

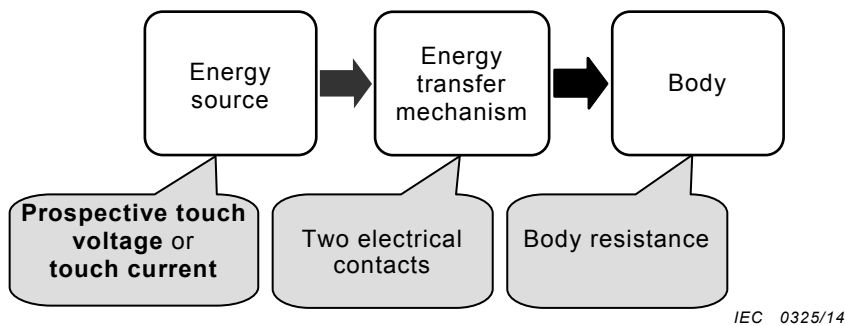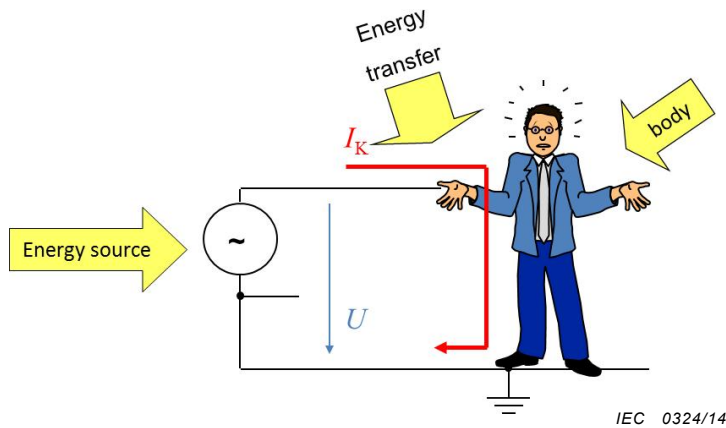


**Figure 3 – Schematic and model for electrically-caused pain or injury**

Depending on the magnitude, duration, wave shape, and frequency of the current, the effect to the human body varies from undetectable to detectable to painful to injurious.

**0.6.2 Models for protection against electrically-caused pain or injury**

Protection against electrically-caused pain or injury requires that one or more **safeguards** be interposed between an electrical energy source capable of causing pain or injury and a body part (see Figure 4).

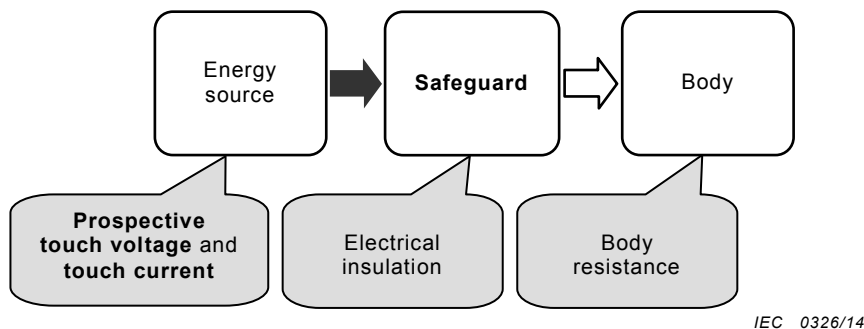

**Figure 4 – Model for protection against electrically-caused pain or injury**

Protection against electrically-caused pain is provided under **normal operating conditions** and **abnormal operating conditions**. Such protection requires that, under **normal operating conditions** and **abnormal operating conditions**, a **basic safeguard** be interposed between an electrical energy source capable of causing pain and an **ordinary person**.

The most common **basic safeguard** against an electrical energy source capable of causing pain is electrical insulation (also known as **basic insulation**) interposed between the energy source and a body part.

Protection against electrically-caused injury is provided under **normal operating conditions**, **abnormal operating conditions**, and **single fault conditions**. Such protection requires that, under **normal operating conditions** and **abnormal operating conditions**, both a **basic safeguard** and a **supplementary safeguard** be interposed between an electrical energy source capable of causing injury and an **ordinary person** (see 4.3.2.4), or an **instructed person** (see 4.3.3.3). In the event of a failure of either **safeguard**, the other **safeguard** becomes effective. The **supplementary safeguard** against an electrical energy source capable of causing injury is placed between the **basic safeguard** and a body part. A **supplementary safeguard** may be additional electrical insulation (**supplementary insulation**) or a protectively earthed conductive barrier or other construction that performs the same function.


The most common **safeguard** against an electrical energy source capable of causing injury is electrical insulation (also known as **double insulation** or **reinforced insulation**) placed between the energy source and a body part.

Likewise, a **reinforced safeguard** may be placed between an electrical energy source capable of causing injury and a body part.

## 0.7 Electrically-caused fire

### 0.7.1 Models for electrically-caused fire

Electrically-caused fire is due to conversion of electrical energy to thermal energy (see Figure 5), where the thermal energy heats a fuel material followed by ignition and combustion.

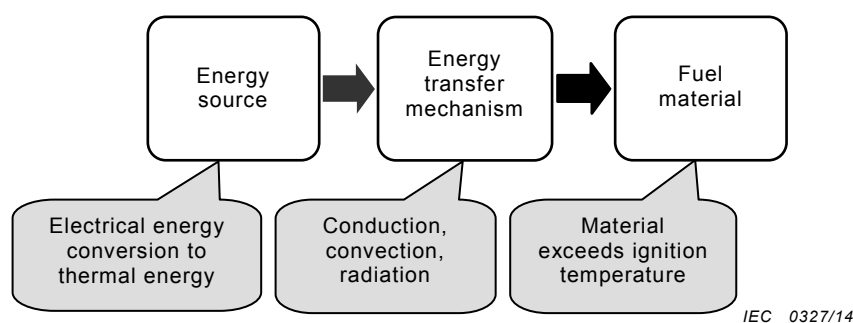

**Figure 5 – Model for electrically-caused fire**

Electrical energy is converted to thermal energy either in a resistance or in an arc and is transferred to a fuel material by conduction, convection, or radiation. As the fuel material heats, it chemically decomposes into gases, liquids and solids. When the gas is at its ignition temperature, the gas can be ignited by an ignition source. When the gas is at its spontaneous ignition temperature, the gas ignites by itself. Both result in fire.

### 0.7.2 Models for protection against electrically-caused fire

The **basic safeguard** against electrically-caused fire (see Figure 6) is that the temperature of a material, under **normal operating conditions** and **abnormal operating conditions**, does not cause the material to ignite.

The **supplementary safeguard** against electrically-caused fire reduces the likelihood of ignition or, in the case of ignition, reduces the likelihood of spread of fire.

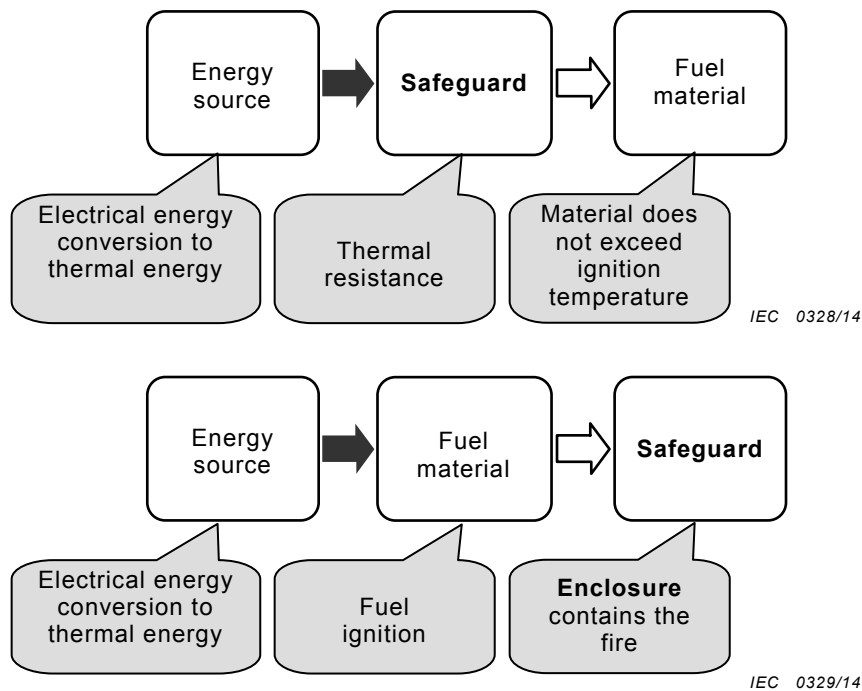


Figure 6 – Models for protection against fire

### 0.8 Injury caused by hazardous substances

Injury caused by **hazardous substances** is due to a chemical reaction with a body part. The extent of injury by a given substance depends on both the magnitude and duration of exposure and on the body part susceptibility to that substance.

The **basic safeguard** against injury caused by **hazardous substances** is containment of the material.

**Supplementary safeguards** against injury caused by **hazardous substances** may include:

- a second container or a spill-resistant container;
- containment trays;
- tamper-proof screws to prevent unauthorized access;
- **instructional safeguards.**

National and regional regulations govern the use of and exposure to **hazardous substances** used in equipment. These regulations do not enable a practical classification of **hazardous substances** in the manner in which other energy sources are classified in this standard. Therefore, energy source classifications are not applied in Clause 7.

## 0.9 Mechanically-caused injury

Mechanically-caused injury is due to kinetic energy transfer to a body part when a collision occurs between a body part and an equipment part. The kinetic energy is a function of the relative motion between a body part and **accessible** parts of the equipment, including parts ejected from the equipment that collide with a body part.

Examples of kinetic energy sources are:

- body motion relative to sharp edges and corners;
- part motion due to rotating or other moving parts, including pinch points;
- part motion due to loosening, exploding, or imploding parts;
- equipment motion due to instability;
- equipment motion due to wall, ceiling, or rack mounting means failure;
- equipment motion due to handle failure;
- part motion due to an exploding **battery**;
- equipment motion due to cart or stand instability or failure.

The **basic safeguard** against mechanically-caused injury is a function of the specific energy source. **Basic safeguards** may include:

- rounded edges and corners;
- an **enclosure** to prevent a moving part from being **accessible**;
- an **enclosure** to prevent expelling a moving part;
- a **safety interlock** to control access to an otherwise moving part;
- means to stop the motion of a moving part;
- means to stabilize the equipment;
- robust handles;
- robust mounting means;
- means to contain parts expelled during **explosion** or implosion.

The **supplementary safeguard** against mechanically-caused injury is a function of the specific energy source. **Supplementary safeguards** may include:

- **instructional safeguards**;
- instructions and training;
- additional **enclosures** or barriers;
- **safety interlocks**.

The **reinforced safeguard** against mechanically-caused injury is a function of the specific energy source. **Reinforced safeguards** may include:

- extra thick glass on the front of a CRT;
- rack slide-rails and means of support;
- **safety interlock**.

## 0.10 Thermally-caused injury (skin burn)

### 0.10.1 Models for thermally-caused injury


Thermally-caused injury may occur when thermal energy capable of causing injury is transferred to a body part (see Figure 7).

Thermal energy transfer occurs when a body touches a hot equipment part. The extent of injury depends on the temperature difference, the thermal mass of the object, rate of thermal energy transfer to the skin, and duration of contact.

The requirements in this standard only address **safeguards** against thermal energy transfer by conduction. This standard does not address **safeguards** against thermal energy transfer by convection or radiation.



IEC 0330/14

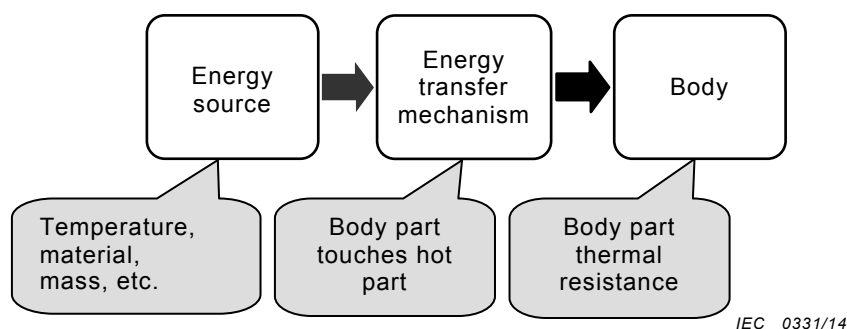


IEC 0331/14

**Figure 7 – Schematic and model for thermally-caused injury**

Depending on the temperature, contact duration, material properties, and mass of the material, the perception of the human body varies from warmth to heat that may result in pain or injury (burn).

#### 0.10.2 Models for protection against thermally-caused pain or injury

Protection against thermally-caused pain or injury requires that one or more **safeguards** be interposed between a thermal energy source capable of causing pain or injury and an **ordinary person** (see Figure 8).

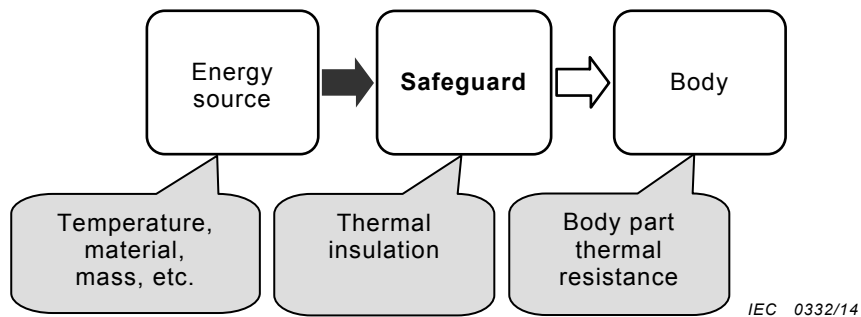

**Figure 8 – Model for protection against thermally-caused injury**

Protection against thermally-caused pain is required under **normal operating conditions** and **abnormal operating conditions**. Such protection requires that a **basic safeguard** be interposed between a thermal energy source capable of causing pain and an **ordinary person**.

Protection against thermally-caused injury is required under **normal operating conditions**, **abnormal operating conditions** and **single fault conditions**. Such protection requires that a **basic safeguard** and a **supplementary safeguard** be interposed between a thermal energy source capable of causing injury and an **ordinary person**.

The **basic safeguard** against a thermal energy source capable of causing pain or injury is thermal insulation placed between the energy source and a body part. In some cases, a **basic safeguard** against a thermal energy source capable of causing pain or injury may be an **instructional safeguard** identifying the hot parts and how to reduce the likelihood of injury. In some cases, a **basic safeguard** reduces the likelihood of a non-injurious thermal energy source from becoming a thermal energy source capable of causing pain or injury.

Examples of such **basic safeguards** are:

- control of electrical energy being converted to thermal energy (for example, a **thermostat**); and
- heat sinking, etc.

The **supplementary safeguard** against a thermal energy source capable of causing injury is thermal insulation placed between the energy source and a body part. In some cases, a **supplementary safeguard** against a thermal energy source capable of causing pain or injury may be an **instructional safeguard** identifying the hot parts and how to reduce the likelihood of injury.

### 0.11 Radiation-caused injury

Radiation-caused injury within the scope of this standard is generally attributed to one of the following energy transfer mechanisms:

- heating of a body organ caused by exposure to non-ionising radiation, such as the highly localised energy of a laser impinging on the retina, or heating a larger volume such as the energy from a high frequency wireless, electromagnetic fields, or high frequency transmitter; or
- auditory injury caused by over stimulation of the ear by excessive peaks or sustained loud sound, leading to physical or nerve damage.

Radiated energy is transferred by impingement of wave emission upon a body part.

The **basic safeguard** against radiation-caused injury is containment of the energy within an **enclosure** that is opaque to the radiated energy.

There are several **supplementary safeguards** against radiation-caused injury. The **supplementary safeguards** may include **safety interlocks** to disconnect power to the generator, tamper-proof screws to prevent unauthorized access, etc.

The **basic safeguard** against auditory injury is to limit the acoustic output of personal music players and their associated headphones and earphones.

Examples of **supplementary safeguards** against auditory pain and injury are the provision of warnings and information advising the user how to use the equipment correctly.

# AUDIO/VIDEO, INFORMATION AND COMMUNICATION TECHNOLOGY EQUIPMENT –

## Part 1: Safety requirements

### 1 Scope

This part of IEC 62368 is applicable to the safety of electrical and electronic equipment within the field of audio, video, information and communication technology, and business and office machines with a **rated voltage** not exceeding 600 V. This standard does not include requirements for performance or functional characteristics of equipment.

NOTE 1 Examples of equipment within the scope of this standard are given in Annex A.

NOTE 2 A **rated voltage** of 600 V is considered to include equipment rated 400/690 V.

This part of IEC 62368 is also applicable to:

- components and subassemblies intended for incorporation in this equipment. Such components and subassemblies need not comply with every requirement of the standard, provided that the complete equipment, incorporating such components and subassemblies, does comply;
- external power supply units intended to supply other equipment within the scope of this part of IEC 62368;
- accessories intended to be used with equipment within the scope of this part of IEC 62368.

This part of IEC 62368 does not apply to power supply systems which are not an integral part of the equipment, such as motor-generator sets, **battery** backup systems and distribution transformers.

This part of IEC 62328 specifies **safeguards** for **ordinary persons**, **instructed persons**, and **skilled persons**. Additional requirements may apply for equipment that is clearly designed or intended for use by children or specifically attractive to children.

NOTE 3 In Australia, the work conducted by an **instructed person** or a **skilled person** may require formal licensing from regulatory authorities.

This standard assumes an altitude of 2 000 m unless specified otherwise by the manufacturer.

This part of IEC 62368 does not apply to equipment to be used in wet areas. Additional requirements may apply.

Additional requirements for equipment intended for outdoor installation are given in IEC 60950-22.

This part of IEC 62368 does not address:

- manufacturing processes except safety testing;
- injurious effects of gases released by thermal decomposition or combustion;
- disposal processes;
- effects of transport (other than as specified in this standard);
- effects of storage of materials, components, or the equipment itself;



- the likelihood of injury from particulate radiation such as alpha particles and beta particles;
- the likelihood of thermal injury due to radiated or convected thermal energy;
- the likelihood of injury due to flammable liquids;
- the use of the equipment in oxygen-enriched or **explosive** atmospheres;
- exposure to chemicals other than as specified in Clause 7;
- electrostatic discharge events;
- environmental aspects;
- requirements for functional safety.

NOTE 4 For specific functional and software safety requirements of electronic safety-related systems (for example, protective electronic circuits), see IEC 61508-1.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60027-1, *Letter symbols to be used in electrical technology – Part 1: General*

IEC 60065, *Audio, video and similar electronic apparatus – Safety requirements*

IEC 60068-2-6, *Environmental testing – Part 2-6: Tests – Test Fc: Vibration (sinusoidal)*

IEC 60068-2-78, *Environmental testing – Part 2-78: Tests – Test Cab: Damp heat, steady state*

IEC/TR 60083, *Plugs and socket-outlets for domestic and similar general use standardized in member countries of IEC*

IEC 60085, *Electrical insulation – Thermal evaluation and designation*

IEC 60086-4, *Primary batteries – Part 4: Safety of lithium batteries*

IEC 60086-5, *Primary batteries – Part 5: Safety of batteries with aqueous electrolyte*

IEC 60107-1:1997, *Methods of measurement on receivers for television broadcast transmissions – Part 1: General considerations – Measurements at radio and video frequencies*

IEC 60112, *Method for the determination of the proof and the comparative tracking indices of solid insulating materials*

IEC 60127 (all parts), *Miniature fuses*

IEC 60227-1, *Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V – Part 1: General requirements*

IEC 60227-2:2003, *Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V – Part 2: Test methods*

IEC 60245-1, *Rubber insulated cables – Rated voltages up to and including 450/750 V – Part 1: General requirements*

IEC 60309 (all parts), *Plugs, socket-outlets and couplers for industrial purposes*

IEC 60317 (all parts), *Specifications for particular types of winding wires*

IEC 60317-43, *Specifications for particular types of winding wires – Part 43: Aromatic polyimide tape wrapped round copper wire, class 240*

IEC 60320 (all parts), *Appliance couplers for household and similar general purposes*

IEC 60320-1, *Appliance couplers for household and similar general purposes – Part 1: General requirements*

IEC 60320-2-2, *Appliance couplers for household and similar general purposes – Part 2-2: Interconnection couplers for household and similar equipment*

IEC 60332-1-2, *Tests on electric and optical fibre cables under fire conditions – Part 1-2: Test for vertical flame propagation for a single insulated wire or cable – Procedure for 1 kW pre-mixed flame*

IEC 60332-1-3, *Tests on electric and optical fibre cables under fire conditions – Part 1-3: Test for vertical flame propagation for a single insulated wire or cable – Procedure for determination of flaming droplets/particles*

IEC 60332-2-2, *Tests on electric and optical fibre cables under fire conditions – Part 2-2: Test for vertical flame propagation for a single small insulated wire or cable – Procedure for diffusion flame*

IEC 60384-14:2005, *Fixed capacitors for use in electronic equipment – Part 14: Sectional specification: Fixed capacitors for electromagnetic interference suppression and connection to the supply mains*

IEC 60417, *Graphical symbols for use on equipment*, available from: <<http://www.graphical-symbols.info/equipment>>

IEC 60529, *Degrees of protection provided by enclosures (IP Code)*

IEC 60664-1:2007, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

IEC 60664-3, *Insulation coordination for equipment within low-voltage systems – Part 3: Use of coating, potting or moulding for protection against pollution*

IEC 60691:2002, *Thermal-links – Requirements and application guide*

IEC 60695-10-2, *Fire hazard testing – Part 10-2: Abnormal heat – Ball pressure test*

IEC 60695-10-3, *Fire hazard testing – Part 10-3: Abnormal heat – Mould stress relief distortion test*

IEC 60695-11-5:2004, *Fire hazard testing – Part 11-5: Test flames – Needle-flame test method – Apparatus, confirmatory test arrangement and guidance*

IEC 60695-11-10, *Fire hazard testing – Part 11-10: Test flames – 50 W horizontal and vertical flame test methods*

IEC 60695-11-20:1999, *Fire hazard testing – Part 11-20: Test flames – 500 W flame test methods*

IEC/TS 60695-11-21, *Fire hazard testing – Part 11-21: Test flames – 500 W vertical flame test method for tubular polymeric materials*

IEC 60728-11:2005, *Cable networks for television signals, sound signals and interactive services – Part 11: Safety*

IEC 60730 (all parts), *Automatic electrical controls for household and similar use*

IEC 60730-1:2010, *Automatic electrical controls for household and similar use – Part 1: General requirements*

IEC 60738-1:2009, *Thermistors – Directly heated positive temperature coefficient – Part 1: Generic specification*

IEC 60747-5-5:2007, *Semiconductor devices – Discrete devices – Part 5-5: Optoelectronic devices – Photocouplers*

IEC 60825-1:2007, *Safety of laser products – Part 1: Equipment classification and requirements*

IEC 60825-2:2004, *Safety of laser products – Part 2: Safety of optical fibre communication systems (OFCS)*

IEC 60825-12, *Safety of laser products – Part 12: Safety of free space optical communication systems used for transmission of information*

IEC 60851-3:2009, *Winding wires – Test methods – Part 3: Mechanical properties*

IEC 60851-5:2008, *Winding wires – Test methods – Part 5: Electrical properties*

IEC 60851-6:1996, *Winding wires – Test methods – Part 6: Thermal properties*

IEC 60896-11, *Stationary lead-acid batteries – Part 11: Vented types – General requirements and methods of tests*

IEC 60896-21:2004, *Stationary lead-acid batteries – Part 21: Valve regulated types – Methods of test*

IEC 60896-22, *Stationary lead-acid batteries – Part 22: Valve regulated types – Requirements*

IEC 60906-1, *IEC system of plugs and socket-outlets for household and similar purposes – Part 1: Plugs and socket-outlets 16 A 250 V a.c.*

IEC 60906-2, *IEC system of plugs and socket-outlets for household and similar purposes – Part 2: Plugs and socket-outlets 15 A 125 V a.c.*

IEC 60947-1, *Low-voltage switchgear and controlgear – Part 1: General rules*

IEC 60950-1:2005, *Information technology equipment – Safety – Part 1: General requirements*

IEC 60950-22:2005, *Information technology equipment – Safety – Part 22: Equipment to be installed outdoors*

IEC 60950-23, *Information technology equipment – Safety – Part 23: Large data storage equipment*

IEC 60990:1999, *Methods of measurement of touch current and protective conductor current*

IEC 60998-1, *Connecting devices for low-voltage circuits for household and similar purposes – Part 1: General requirements*

IEC 60999-1, *Connecting devices – Electrical copper conductors – Safety requirements for screw-type and screwless-type clamping units – Part 1: General requirements and particular requirements for clamping units for conductors from 0,2 mm<sup>2</sup> up to 35 mm<sup>2</sup> (included)*

IEC 60999-2, *Connecting devices – Electrical copper conductors – Safety requirements for screw-type and screwless-type clamping units – Part 2: Particular requirements for clamping units for conductors above 35 mm<sup>2</sup> up to 300 mm<sup>2</sup> (included)*

IEC 61051-1, *Varistors for use in electronic equipment – Part 1: Generic specification*

IEC 61051-2:1991, *Varistors for use in electronic equipment – Part 2: Sectional specification for surge suppression varistors*

Amendment 1:2009

IEC 61056-1, *General purpose lead-acid batteries (valve-regulated types) – Part 1: General requirements, functional characteristics – Methods of test*

IEC 61056-2, *General purpose lead-acid batteries (valve-regulated types) – Part 2: Dimensions, terminals and marking*

IEC 61058-1:2008, *Switches for appliances – Part 1: General requirements*

IEC 61140:2001, *Protection against electric shock – Common aspects for installation and equipment*

IEC/TS 61201:2007, *Use of conventional touch voltage limits – Application guide*

IEC 61204-7, *Low-voltage power supplies, d.c. output – Part 7: Safety requirements*

IEC 61293, *Marking of electrical equipment with ratings related to electrical supply – Safety requirements*

IEC 61427, *Secondary cells and batteries for photovoltaic energy systems (PVES) – General requirements and methods of test*

IEC/TS 61430, *Secondary cells and batteries – Test methods for checking the performance of devices designed for reducing explosion hazards – Lead-acid starter batteries*

IEC 61434, *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Guide to designation of current in alkaline secondary cell and battery standards*

IEC 61558-1:2005, *Safety of power transformers, power supplies, reactors and similar products – Part 1: General requirements and tests*

IEC 61558-2-16, *Safety of transformers, reactors, power supply units and similar products for voltages up to 1 100 V – Part 2-16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units*<sup>1</sup>

IEC 61643-11, *Low-voltage surge protective devices – Part 11: Surge protective devices connected to low-voltage power systems – Requirements and test methods*

IEC 61810-1:2008, *Electromechanical elementary relays – Part 1: General requirements*

IEC 61959, *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Mechanical tests for sealed portable secondary cells and batteries*

IEC 61965:2003, *Mechanical safety of cathode ray tubes*

IEC 61984, *Connectors – Safety requirements and tests*

IEC 62133, *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications*

IEC 62281, *Safety of primary and secondary lithium cells and batteries during transport*

IEC 62471:2006, *Photobiological safety of lamps and lamp systems*

IEC/TR 62471-2, *Photobiological safety of lamps and lamp systems – Part 2: Guidance on manufacturing requirements relating to non-laser optical radiation safety*

IEC 62485-2, *Safety requirements for secondary batteries and battery installations – Part 2: Stationary batteries*<sup>2</sup>

ISO 178, *Plastics – Determination of flexural properties*

ISO 179-1, *Plastics – Determination of Charpy impact properties – Part 1: Non-instrumented impact test*

ISO 180, *Plastics – Determination of Izod impact strength*

ISO 306, *Plastics – Thermoplastic materials – Determination of Vicat softening temperature (VST)*

ISO 527 (all parts), *Plastics – Determination of tensile properties*

ISO 871, *Plastics – Determination of ignition temperature using a hot-air furnace*

ISO 3864 (all parts), *Graphical symbols – Safety colours and safety signs*

ISO 3864-2, *Graphical symbols – Safety colours and safety signs – Part 2: Design principles for product safety labels*

ISO 4892-1, *Plastics – Methods of exposure to laboratory light sources – Part 1: General guidance*

---

<sup>1</sup> To be published.

<sup>2</sup> To be published.

ISO 4892-2:2006, *Plastics – Methods of exposure to laboratory light sources – Part 2: Xenon-arc lamps*

ISO 4892-4, *Plastics – Methods of exposure to laboratory light sources – Part 4: Open-flame carbon-arc lamps*

ISO 7000, *Graphical symbols for use on equipment – Index and synopsis*, available from: <http://www.graphical-symbols.info/equipment>

ISO 7010, *Graphical symbols – Safety colours and safety signs – Safety signs used in workplaces and public areas*

ISO 8256, *Plastics – Determination of tensile-impact strength*

ISO 9772, *Cellular plastics – Determination of horizontal burning characteristics of small specimens subjected to a small flame*

ISO 9773, *Plastics – Determination of burning behaviour of thin flexible vertical specimens in contact with a small-flame ignition source*

EN 50332-1, *Sound system equipment: Headphones and earphones associated with portable audio equipment – Maximum sound pressure level measurement methodology and limit considerations – Part 1: General method for "one package equipment"*

EN 50332-2, *Sound system equipment: Headphones and earphones associated with portable audio equipment – Maximum sound pressure level measurement methodology and limit considerations – Part 2: Matching of sets with headphones if either or both are offered separately*