



IEC 61784-3-13

Edition 1.0 2010-06

INTERNATIONAL STANDARD



**Industrial communication networks – Profiles –
Part 3-13: Functional safety fieldbuses – Additional specifications for CPF 13**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE **XH**

ICS 25.040.40; 35.100.05

ISBN 978-2-88910-982-1

CONTENTS

FOREWORD.....	13
0 Introduction	15
0.1 General.....	15
0.2 Patent declaration	17
1 Scope.....	19
2 Normative references	19
3 Terms, definitions, symbols, abbreviated terms and conventions	20
3.1 Terms and definitions	20
3.1.1 Common terms and definitions	20
3.1.2 CPF 13: Additional terms and definitions	24
3.2 Symbols and abbreviated terms.....	25
3.2.1 Common symbols and abbreviated terms	25
3.2.2 CPF 13: Additional symbols and abbreviated terms	26
3.3 Conventions	27
3.3.1 Hexadecimal values.....	27
3.3.2 Binary values.....	27
3.3.3 Wildcard digits.....	27
3.3.4 Diagrams.....	27
4 Overview of FSCP 13/1 (Ethernet POWERLINK safety)	27
4.1 Functional Safety Communication Profile 13/1.....	27
4.2 Technical overview.....	28
5 General	28
5.1 External documents providing specifications for the profile.....	28
5.2 Safety functional requirements	29
5.3 Safety measures	29
5.4 Safety communication layer structure	31
5.5 Relationships with FAL (and DLL, PhL)	32
5.5.1 General	32
5.5.2 Data types	32
6 Safety communication layer services.....	32
6.1 Modelling	32
6.1.1 Reference model	32
6.1.2 Communication model	33
6.1.3 Device roles and topology	34
6.2 Life cycle model	38
6.2.1 General	38
6.2.2 Concept, planning and implementation	38
6.2.3 Commissioning.....	39
6.2.4 Operation terms.....	40
6.2.5 Maintenance terms	42
6.3 Non safety communication layer.....	42
6.3.1 General	42
6.3.2 Requirements for data transport	42
6.3.3 Domain protection and separation	46
7 Safety communication layer protocol	46
7.1 Safety PDU format	46

7.1.1	General	46
7.1.2	Address field (ADR).....	48
7.1.3	PDU identification field (ID)	49
7.1.4	Length field (LE).....	50
7.1.5	Consecutive Time field (CT)	50
7.1.6	Payload data field (DB0 to DBn)	50
7.1.7	Cyclic Redundancy Check field (CRC-8 / CRC-16)	50
7.1.8	Time Request Address field (TADR)	50
7.1.9	Time Request Distinctive Number field (TR)	51
7.1.10	UDID of SCM coding (UDID of SCM)	51
7.2	Safety Process Data Objects (SPDO).....	51
7.2.1	General	51
7.2.2	SPDO telegram types	51
7.2.3	Data Only telegram.....	51
7.2.4	Data with Time Request telegram	52
7.2.5	Data with Time Response telegram	53
7.3	Safety Service Data Object (SSDO)	54
7.3.1	General	54
7.3.2	SSDO telegram types	54
7.3.3	SSDO services and protocols	55
7.3.4	SSDO Initiate Download	56
7.3.5	SSDO Segmented Download	57
7.3.6	SSDO Initiate Upload	58
7.3.7	SSDO Segmented Upload	59
7.3.8	SSDO Abort.....	60
7.4	Safety Network Management (SNMT).....	62
7.4.1	General	62
7.4.2	SNMT telegram types	62
7.4.3	SNMT services and protocols	62
7.5	Safety Object dictionary (SOD).....	75
7.5.1	General	75
7.5.2	Object dictionary entry definition.....	75
7.5.3	Data type entry specification.....	81
7.5.4	Object description.....	82
7.6	Safety related PDO mapping	117
7.6.1	General	117
7.6.2	Transmit SPDOs.....	118
7.6.3	Receive SPDOs.....	118
7.6.4	SPDO mapping parameter	118
7.6.5	SPDO mapping example.....	119
7.6.6	SPDO error handling	121
7.7	State and sequence diagrams	121
7.7.1	Safety Process Data Object (SPDO).....	121
7.7.2	Time synchronization and validation	125
7.7.3	Safety Service Data Object (SSDO).....	134
7.7.4	SOD access	136
7.7.5	Safety Network Management Object (SNMT)	141
7.7.6	SN power up.....	143
7.7.7	SN power down	147

7.7.8	SN recovery after Restart / Error	147
7.7.9	SCM power up	147
7.7.10	Address verification	150
7.7.11	Commissioning mode	152
7.7.12	Handle single UDID mismatch	152
7.7.13	Activate SN	156
7.7.14	Device exchange	157
8	Safety communication layer management	157
8.1	General	157
8.2	Goals of parameterization	158
8.3	Initial configuration of a device	158
8.3.1	General	158
8.3.2	SD setup by only configuring the SCM	158
8.3.3	SD setup configuring each SN	159
8.4	Avoiding of parameterize the wrong device	159
8.5	Parameter check mechanism	159
9	System requirements	159
9.1	Indicators and switches	159
9.2	Installation guidelines	159
9.3	Safety function response time	159
9.4	Duration of demands	161
9.5	Constraints for calculation of system characteristics	161
9.5.1	General	161
9.5.2	Number of sinks limit	161
9.5.3	Message rate limit	161
9.5.4	Message payload limit	161
9.5.5	Residual error rate	161
9.6	Maintenance	161
9.6.1	Diagnostic information	161
9.6.2	Replacement of safety related devices	161
9.6.3	Modification	162
9.6.4	Machine part changing	162
9.6.5	Firmware update of safety related nodes	162
9.6.6	Machine check due to service interval	162
9.7	Safety manual	162
10	Assessment	162
10.1	General	162
10.2	CP 13/1 assessment	163
10.3	FSCP 13/1 conformance test	163
10.4	Approval of functional safety by competent assessment body	163
10.5	Summary	163
Annex A (informative) Additional information for functional safety communication profiles of CPF 13		164
A.1	Hash function calculation	164
A.2	Stochastic errors – general considerations	167
A.2.1	General	167
A.2.2	Error detection mechanisms	167
A.2.3	Calculations	169

A.3 Stochastic errors (case A)	169
A.3.1 General	169
A.3.2 Constraints	169
A.3.3 Residual error rate	169
A.3.4 Summary	170
A.4 Stochastic errors (case B)	170
A.4.1 General	170
A.4.2 Constraints	170
A.4.3 Bit error probability considerations	170
A.4.4 Residual error rate (payload 1—8)	171
A.4.5 Residual error rate (payload 9—254)	171
A.4.6 Summary	171
Annex B (informative) Information for assessment of the functional safety communication profiles of CPF 13	172
Bibliography	173
Table 1 – Communication errors and detection measures (cyclic)	29
Table 2 – Communication errors and detection measures (acyclic)	30
Table 3 – Device roles	35
Table 4 – PDU format	48
Table 5 – PDU identification field (ID)	49
Table 6 – Used ID field combinations	49
Table 7 – Request / response identification	49
Table 8 – Type of CRC depending on LE	50
Table 9 – SPDO telegram types (ID field, bits 2, 3 and 4)	51
Table 10 – Fields of SPDO_Data_Only telegram	52
Table 11 – Fields of SPDO_Data_with_Time_Request telegram	53
Table 12 – Fields of SPDO_Data_with_Time_Response telegram	53
Table 13 – SSDO telegram types (ID field, bits 2, 3 and 4)	54
Table 14 – SOD Access Command (SACmd) – bit coding	54
Table 15 – Fields of Initiate Download SSDO_Service_Request telegram	56
Table 16 – Fields of Initiate Download SSDO_Service_Response telegram	57
Table 17 – Fields of Segmented Download SSDO_Service_Request telegram	57
Table 18 – Fields of Segmented Download SSDO_Service_Response telegram	58
Table 19 – Fields of Initiate Upload SSDO_Service_Request telegram	58
Table 20 – Fields of Initiate Upload SSDO_Service_Response telegram	59
Table 21 – Fields of Segmented Upload SSDO_Service_Request telegram	60
Table 22 – Fields of Segmented Upload SSDO_Service_Response telegram	60
Table 23 – Fields of Segmented Upload SSDO_Service_Request telegram	60
Table 24 – Fields of Segmented Upload SSDO_Service_Response telegram	61
Table 25 – SSDO Abort codes	61
Table 26 – SNMT telegram types (ID field, bits 2, 3 and 4)	62
Table 27 – Fields of SNMT_Request_UDID telegram	63
Table 28 – Fields of SNMT_Response_UDID telegram	63

Table 29 – Fields of SNMT_Assign_SADR telegram	64
Table 30 – Fields of SNMT_SADR_Assigned telegram	65
Table 31 – Fields of SNMT_SN_reset_guarding_SCM telegram	65
Table 32 – SNMT request telegram types	66
Table 33 – SNMT response telegram types	66
Table 34 – Fields of SNMT_SN_set_to_PRE_OP telegram	66
Table 35 – Fields of SNMT_SN_status_PRE_OP telegram	67
Table 36 – Fields of SNMT_SN_set_to_OP telegram	68
Table 37 – Fields of SNMT_SN_status_OP telegram	68
Table 38 – Fields of SNMT_SN_busy telegram	68
Table 39 – Fields of SNMT_SN_FAIL telegram	69
Table 40 – SNMT_SN_FAIL Error Group values	69
Table 41 – SNMT_SN_FAIL Error Code values	69
Table 42 – Fields of SNMT_SN_ACK telegram	70
Table 43 – Fields of SNMT_SCM_set_to_STOP telegram	70
Table 44 – Fields of SNMT_SCM_set_to_OP telegram	71
Table 45 – Fields of SNMT_SCM_guard_SN telegram	72
Table 46 – Fields of SNMT_SN_status_OP/SNMT_SN_status_OP telegrams	72
Table 47 – Fields of SNMT_assign_additional_SADR telegram	73
Table 48 – Fields of SNMT_assigned_additional_SADR telegram	73
Table 49 – Fields of SNMT_assign_UDID_of_SCM telegram	74
Table 50 – Fields of SNMT_assigned_UDID_of_SCM telegram	74
Table 51 – Object type definition	75
Table 52 – Access attributes for data objects	77
Table 53 – SPDO mapping attributes for data objects	77
Table 54 – Basic data type object definition example	77
Table 55 – Compound data type object definition example	78
Table 56 – Sub index interpretation	78
Table 57 – NumberOfEntries sub index specification	79
Table 58 – RECORD type object sub index specification	79
Table 59 – ARRAY type object sub index specification	80
Table 60 – StructureOfObject encoding	80
Table 61 – Object dictionary data types	81
Table 62 – 0021h Compound data type description	82
Table 63 – 0021h Compound sub index descriptions	82
Table 64 – Standard objects	83
Table 65 – Common communication objects	83
Table 66 – Receive SPDO communication objects	83
Table 67 – Receive SPDO mapping objects	84
Table 68 – Transmit SPDO communication objects	84
Table 69 – Transmit SPDO mapping objects	84
Table 70 – SADR DVI list	84
Table 71 – Additional SADR list	85

Table 72 – SADR UDID list	85
Table 73 – Object 1001h Error Register	85
Table 74 – Object 1001h Error Register value interpretation	86
Table 75 – Object 1002h Manufacturer status register	86
Table 76 – Object 1003h Pre defined error field	87
Table 77 – Object 1003h sub index 00h	87
Table 78 – Object 1003h sub index 01h	87
Table 79 – Object 1003h sub index 02h to FDh.....	88
Table 80 – Object 100Ch Life Guarding	88
Table 81 – Object 100Ch sub index 00h.....	88
Table 82 – Object 100Ch sub index 01h.....	89
Table 83 – Object 100Ch sub index 02h.....	89
Table 84 – Object 100Dh Refresh Interval of Reset Guarding	90
Table 85 – Object 1018h Device Vendor Information.....	90
Table 86 – Object 1018h sub index 00h	90
Table 87 – Object 1018h sub index 01h	91
Table 88 – Object 1018h sub index 02h	91
Table 89 – Object 1018h sub index 03h	91
Table 90 – Object 1018h sub index 04h	92
Table 91 – Object 1018h sub index 05h	92
Table 92 – Object 1018h sub index 06h	92
Table 93 – Object 1018h sub index 07h	93
Table 94 – Structure of Revision Number.....	93
Table 95 – Object 1019h Unique Device ID.....	94
Table 96 – Object 101Ah Parameter Download	94
Table 97 – Object 101Bh SCM Parameters	95
Table 98 – Object 101Bh sub index 00h.....	95
Table 99 – Object 101Bh sub index 01h.....	95
Table 100 – Object 1200h Common Communication Parameter	96
Table 101 – Object 1200h sub index 00h	96
Table 102 – Object 1200h sub index 01h	96
Table 103 – Object 1200h sub index 02h	97
Table 104 – Object 1200h sub index 03h	97
Table 105 – Object 1200h sub index 04h	98
Table 106 – Object 1201h SSDO Communication Parameter	98
Table 107 – Object 1201h sub index 00h	98
Table 108 – Object 1201h sub index 01h	99
Table 109 – Object 1201h sub index 02h	99
Table 110 – Object 1202h SNMT Communication Parameter	99
Table 111 – Object 1202h sub index 00h	100
Table 112 – Object 1202h sub index 01h	100
Table 113 – Object 1202h sub index 02h	100
Table 114 – Object 1400h -- 17FEh RxSPDO Communication Parameter	101

Table 115 – Object 1400h -- 17FEh sub index 00h.....	101
Table 116 – Object 1400h -- 17FEh sub index 01h.....	101
Table 117 – Object 1400h -- 17FEh sub index 02h.....	102
Table 118 – Object 1400h -- 17FEh sub index 03h.....	102
Table 119 – Object 1400h -- 17FEh sub index 04h.....	102
Table 120 – Object 1400h -- 17FEh sub index 05h.....	103
Table 121 – Object 1400h -- 17FEh sub index 06h.....	103
Table 122 – Object 1400h -- 17FEh sub index 07h.....	103
Table 123 – Object 1400h -- 17FEh sub index 08h.....	104
Table 124 – Object 1400h -- 17FEh sub index 09h.....	104
Table 125 – Object 1400h -- 17FEh sub index 0Ah	104
Table 126 – Object 1400h -- 17FEh sub index 0Bh	105
Table 127 – Object 1400h -- 17FEh sub index 0Ch	105
Table 128 – Object 1800h -- 1BFEh RxSPDO communication parameter	105
Table 129 – Object 1800h -- 1BFEh sub index 00h	106
Table 130 – Object 1800h -- 1BFEh sub index 01h	106
Table 131 – Object 1800h -- 1BFEh sub index 02h -- FDh	106
Table 132 – 1Object C00h -- 1FFEh TxSPDO communication parameter	107
Table 133 – Object 1C00h -- 1FFEh sub index 00h	107
Table 134 – Object 1C00h -- 1FFEh sub index 01h	107
Table 135 – Object 1C00h -- 1FFEh sub index 02h	108
Table 136 – Object 1C00h -- 1FFEh sub index 03h	108
Table 137 – Object C000h -- C3FEh TxSPDO mapping parameter	108
Table 138 – Object C000h -- C3FEh sub index 00h.....	109
Table 139 – Object C000h -- C3FEh sub index 01h.....	109
Table 140 – Object C000h -- C3FEh sub index 02h -- FDh.....	109
Table 141 – Object C400h -- C7FEh SADR-DVI list	110
Table 142 – Object C000h -- C3FEh sub index 00h.....	110
Table 143 – Object C000h -- C3FEh sub index 01h.....	110
Table 144 – Object C000h -- C3FEh sub index 02h.....	111
Table 145 – Object C000h -- C3FEh sub index 03h.....	111
Table 146 – Object C000h -- C3FEh sub index 04h.....	111
Table 147 – Object C000h -- C3FEh sub index 05h.....	112
Table 148 – Object C000h -- C3FEh sub index 06h.....	112
Table 149 – Object C000h -- C3FEh sub index 07h.....	112
Table 150 – Object C000h -- C3FEh sub index 08h.....	113
Table 151 – Object C000h -- C3FEh sub index 09h.....	113
Table 152 – Object C000h -- C3FEh sub index 0Ah	113
Table 153 – Object C000h -- C3FEh sub index 0Bh	114
Table 154 – Object C801h -- CBFFh Additional SADR list.....	114
Table 155 – Object C801h -- CBFFh sub index 00h	114
Table 156 – Object C801h -- CBFFh sub index 01h	115
Table 157 – Object C801h -- CBFFh sub index 02h	115

Table 158 – Object Additional SADR List Example.....	116
Table 159 – Object CC01h -- CFFFh SADR-UDID list	116
Table 160 – Object C801h -- CBFFh sub index 00h	116
Table 161 – Object C801h -- CBFFh sub index 01h -- FDh.....	117
Table 162 – SADR-UDID List Example.....	117
Table 163 – Structure of SPDO mapping entry.....	118
Table 164 – Mapping example table 1.....	119
Table 165 – Mapping example table 2.....	119
Table 166 – Mapping example table 3.....	120
Table 167 – Mapping example table 4.....	120
Table 168 – Mapping example table 5.....	120
Table 169 – Mapping example table 6.....	120
Table 170 – Mapping example table 7.....	121
Table 171 – SPDO communication producer item description	122
Table 172 – SPDO communication producer state description	122
Table 173 – SPDO communication consumer item description	123
Table 174 – SPDO communication consumer state description	124
Table 175 – SPDO communication consumer telegram validation item description.....	125
Table 176 – SPDO communication consumer telegram validation state description.....	125
Table 177 – Time synchronization item description	126
Table 178 – Time validation item description	129
Table 179 – Extended time synchronization item description.....	131
Table 180 – Time synchronization producer item description	132
Table 181 – Time synchronization producer state description	132
Table 182 – Time synchronization consumer item description	133
Table 183 – Time synchronization consumer state description	134
Table 184 – SSDO client item description	135
Table 185 – SSDO client state description	135
Table 186 – SSDO server state description.....	136
Table 187 – SOD access item description.....	137
Table 188 – Segmented SOD access client item description	139
Table 189 – Segmented SOD download access client state description	139
Table 190 – Segmented SOD access server item description.....	141
Table 191 – Segmented SOD access server state description.....	141
Table 192 – SNMT master item description.....	142
Table 193 – SNMT master state description.....	142
Table 194 – SNMT slave state description	143
Table 195 – SN power up state description	144
Table 196 – State and communication object relation	144
Table 197 – SN Pre-Operational state item description	145
Table 198 – SN Pre-Operational state description.....	146
Table 199 – SN Operational state item description.....	147
Table 200 – SN Operational state description	147

Table 201 – SCM power up state description	148
Table 202 – State and communication object relation	148
Table 203 – SCM Operational state item description	150
Table 204 – SCM Operational state description	150
Table 205 – Address verification item description	152
Table 206 – Address verification state description	152
Table 207 – SCM handle single UDID mismatch state description.....	153
Table 208 – SCM verify parameters state description	156
Table 209 – Activate SN state description.....	157
Figure 1 – Relationships of IEC 61784-3 with other standards (machinery)	15
Figure 2 – Relationships of IEC 61784-3 with other standards (process).....	16
Figure 3 – Producer consumer example	28
Figure 4 – Client server example	28
Figure 5 – Communication layer structure	31
Figure 6 – Safety communication channel.....	32
Figure 7 – Characteristic producer / consumer communication.....	33
Figure 8 – Extended producer / consumer communication	34
Figure 9 – Client Server communication.....	34
Figure 10 – Topology overview	35
Figure 11 – Safety Domain protection (example).....	36
Figure 12 – Safety Domain separation (example).....	37
Figure 13 – Data flow example.....	41
Figure 14 – Communication model.....	43
Figure 15 – SPDO transport.....	44
Figure 16 – SSDO transport.....	45
Figure 17 – Diagnostic data representation.....	46
Figure 18 – Safety PDUs inside a CP 13/1 PDU.....	47
Figure 19 – Safety PDU for n = 0 -- 8 octet payload data	47
Figure 20 – Safety PDU for n = 9 -- 254 octet payload data	47
Figure 21 – SPDO_Data_Only telegram	52
Figure 22 – SPDO_Data_with_Time_Request telegram	52
Figure 23 – SPDO_Data_with_Time_Response telegram.....	53
Figure 24 – SSDO download protocols.....	55
Figure 25 – SSDO upload protocols	56
Figure 26 – SSDO Initiate Download protocol	56
Figure 27 – SSDO Segmented Download protocol	57
Figure 28 – SSDO Initiate Upload protocol.....	58
Figure 29 – SSDO Segmented Upload protocol.....	59
Figure 30 – SSDO Abort protocol.....	60
Figure 31 – UDID Request / Response protocol	63
Figure 32 – SADR Assignment protocol	64

Figure 33 – Reset Node Guarding Time protocol.....	65
Figure 34 – SN set to Pre-Operational protocol.....	66
Figure 35 – SN set to Operational protocol	67
Figure 36 – SN Acknowledge protocol	69
Figure 37 – SN set to stop protocol.....	70
Figure 38 – SCM set to Operational protocol.....	71
Figure 39 – Node Guarding protocol	71
Figure 40 – Additional SADR Assignment protocol.....	73
Figure 41 – UDID of SCM Assignment protocol.....	74
Figure 42 – SPDO mapping example	119
Figure 43 – State diagram TxSPDO	121
Figure 44 – SPDO communication producer.....	122
Figure 45 – State diagram RxSPDO.....	123
Figure 46 – SPDO communication consumer	123
Figure 47 – State diagram process data.....	124
Figure 48 – Time synchronization and validation.....	125
Figure 49 – Time synchronization detail	126
Figure 50 – Calculation of propagation delay	128
Figure 51 – Time validation, propagation delay explanation limits	128
Figure 52 – Time synchronization on a nonsafe network	130
Figure 53 – Explanation of time synchronization	130
Figure 54 – Time synchronization failure.....	131
Figure 55 – State diagram time synchronization producer	132
Figure 56 – State diagram time synchronization consumer.....	133
Figure 57 – State diagram SSDO client.....	135
Figure 58 – State diagram SSDO server	136
Figure 59 – Expedited SOD access.....	137
Figure 60 – State diagram segmented SOD download access client	138
Figure 61 – Segmented SOD download access.....	139
Figure 62 – State diagram segmented SOD download access server	140
Figure 63 – State diagram SNMT master	142
Figure 64 – State diagram SNMT slave.....	143
Figure 65 – State diagram SN power up.....	144
Figure 66 – State diagram SN Pre-Operational	145
Figure 67 – State diagram SN Operational.....	146
Figure 68 – Life Guarding telegram.....	147
Figure 69 – State diagram SCM power up.....	148
Figure 70 – State diagram SCM Operational.....	149
Figure 71 – State diagram SCM address verification	151
Figure 72 – State diagram SCM handle single UDID mismatch	153
Figure 73 – State diagram SCM verify parameters	155
Figure 74 – State diagram activate SN.....	157
Figure 75 – Safety function response time	160

Figure 76 – Assessment flow of devices	163
Figure A.1 – Structure of safety PDU	168
Figure A.2 – Error detection by the use of a CRC	168
Figure A.3 – Residual errors per hour	170
Figure A.4 – Residual errors per hour (payload 9-254).....	171

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**INDUSTRIAL COMMUNICATION NETWORKS –
PROFILES –****Part 3-13: Functional safety fieldbuses –
Additional specifications for CPF 13**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.

International Standard IEC 61784-3-13 has been prepared by subcommittee 65C: Industrial networks, of IEC technical committee 65: Industrial process measurement, control and automation.

The text of this standard is based on the following documents:

FDIS	Report on voting
65C/591A/FDIS	65C/603/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61784-3 series, published under the general title *Industrial communication networks – Profiles – Functional safety fieldbuses*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.


0 Introduction

0.1 General

The IEC 61158 fieldbus standard together with its companion standards IEC 61784-1 and IEC 61784-2 defines a set of communication protocols that enable distributed control of automation applications. Fieldbus technology is now considered well accepted and well proven. Thus many fieldbus enhancements are emerging, addressing not yet standardized areas such as real time, safety-related and security-related applications.

This standard explains the relevant principles for functional safety communications with reference to IEC 61508 series and specifies several safety communication layers (profiles and corresponding protocols) based on the communication profiles and protocol layers of IEC 61784-1, IEC 61784-2 and the IEC 61158 series. It does not cover electrical safety and intrinsic safety aspects.


Figure 1 shows the relationships between this standard and relevant safety and fieldbus standards in a machinery environment.

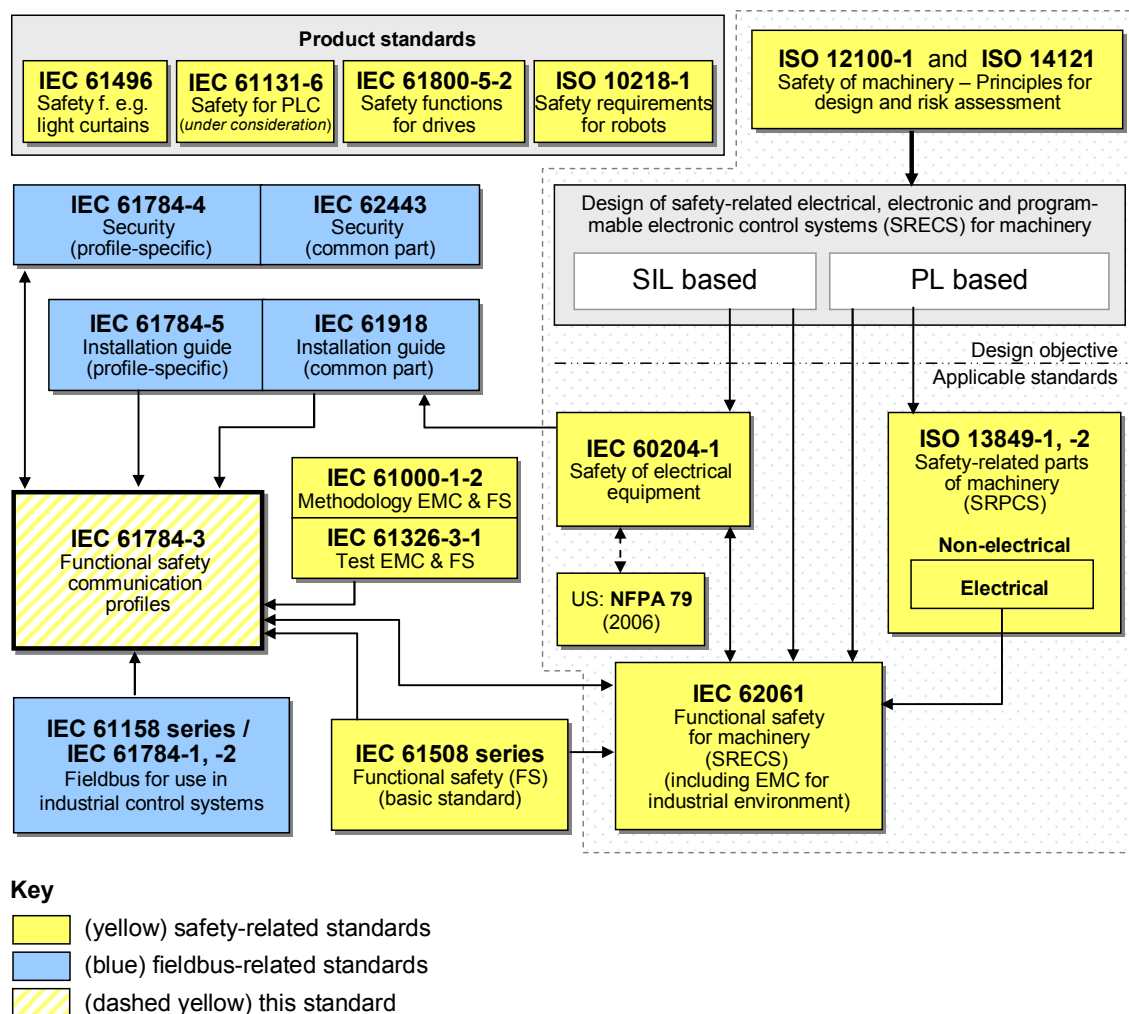

NOTE Subclauses 6.7.6.4 (high complexity) and 6.7.8.1.6 (low complexity) of IEC 62061 specify the relationship between PL (Category) and SIL.

Figure 1 – Relationships of IEC 61784-3 with other standards (machinery)

Figure 2 shows the relationships between this standard and relevant safety and fieldbus standards in a process environment.

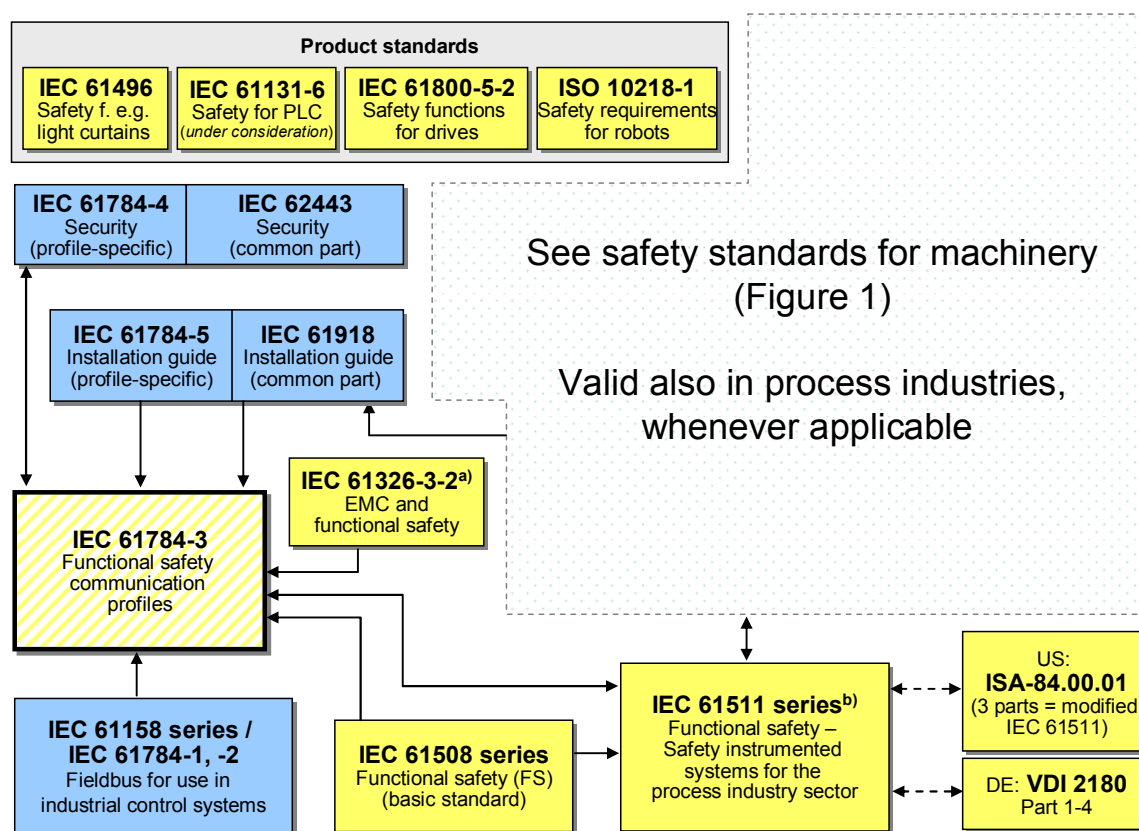

Key

- (yellow) safety-related standards
- (blue) fieldbus-related standards
- (dashed yellow) this standard

^a For specified electromagnetic environments; otherwise IEC 61326-3-1.

^b EN ratified.

Figure 2 – Relationships of IEC 61784-3 with other standards (process)

Safety communication layers which are implemented as parts of safety-related systems according to IEC 61508 series provide the necessary confidence in the transportation of messages (information) between two or more participants on a fieldbus in a safety-related system, or sufficient confidence of safe behaviour in the event of fieldbus errors or failures.

Safety communication layers specified in this standard do this in such a way that a fieldbus can be used for applications requiring functional safety up to the Safety Integrity Level (SIL) specified by its corresponding functional safety communication profile.

The resulting SIL claim of a system depends on the implementation of the selected functional safety communication profile within this system – implementation of a functional safety communication profile in a standard device is not sufficient to qualify it as a safety device.

This standard describes:

- basic principles for implementing the requirements of IEC 61508 series for safety-related data communications, including possible transmission faults, remedial measures and considerations affecting data integrity;
- individual description of functional safety profiles for several communication profile families in IEC 61784-1 and IEC 61784-2;
- safety layer extensions to the communication service and protocols sections of the IEC 61158 series.

0.2 Patent declaration

The International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this document may involve the use of patents concerning the functional safety communication profiles for family 13 as follows, where the [xx] notation indicates the holder of the patent right:

AT 31/2007	[BR]	Anordnung und ein Verfahren zur sicheren Datenkommunikation über ein nicht sicheres Netzwerk
DE 102004055978.3	[BR]	Verfahren zur Zeitsynchronisation innerhalb eines sicherheitsgerichteten Netzwerkes
DE 102004055685.7	[BR]	Verfahren zur Abgrenzung eines sicheren Netzwerkes
DE 102004055684.9	[BR]	Verfahren zur Absicherung des Datentransfers in einem sicheren Netzwerk mit CRC's variabler Länge
EP 08150038	[BR]	Arrangement and a method for safe data communication via a non-safe network
US 11/970178	[BR]	Arrangement and a method for safe data communication via a non-safe network

IEC takes no position concerning the evidence, validity and scope of these patent rights.

The holders of these patents rights have assured the IEC that they are willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holders of these patent rights are registered with IEC.

Information may be obtained from:

[BR] Bernecker + Rainer
Industrie-Elektronik Ges.m.b.H.
B&R Strasse 1
5142 Eggelsberg
AUSTRIA

Tel.: +43 7748 6586– 0
Fax.: +43 7748 6586 – 26

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. IEC shall not be held responsible for identifying any or all such patent rights.

INDUSTRIAL COMMUNICATION NETWORKS – PROFILES –

Part 3-13: Functional safety fieldbuses – Additional specifications for CPF 13

1 Scope

This part of the IEC 61784-3 series specifies a safety communication layer (services and protocol) based on CPF 13 of IEC 61784-2 and IEC 61158 Type 13. It identifies the principles for functional safety communications defined in IEC 61784-3 that are relevant for this safety communication layer.

NOTE 1 It does not cover electrical safety and intrinsic safety aspects. Electrical safety relates to hazards such as electrical shock. Intrinsic safety relates to hazards associated with potentially explosive atmospheres.

This part¹ defines mechanisms for the transmission of safety-relevant messages among participants within a distributed network using fieldbus technology in accordance with the requirements of IEC 61508 series² for functional safety. These mechanisms may be used in various industrial applications such as process control, manufacturing automation and machinery.

This part provides guidelines for both developers and assessors of compliant devices and systems.

NOTE 2 The resulting SIL claim of a system depends on the implementation of the selected functional safety communication profile within this system – implementation of a functional safety communication profile according to this part in a standard device is not sufficient to qualify it as a safety device.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61131-3, *Programmable controllers – Part 3: Programming languages*

IEC 61158-3-13, *Industrial communication networks – Fieldbus specifications – Part 3-13: Data-link layer service definition – Type 13 elements*

IEC 61158-4-13, *Industrial communication networks – Fieldbus specifications – Part 4-13: Data-link layer protocol specification – Type 13 elements*

IEC 61158-5-13, *Industrial communication networks – Fieldbus specifications – Part 5-13: Application layer service definition – Type 13 elements*

IEC 61158-6-13, *Industrial communication networks – Fieldbus specifications – Part 6-13: Application layer protocol specification – Type 13 elements*

¹ In the following pages of this standard, “this part” will be used for “this part of the IEC 61784-3 series”.

² In the following pages of this standard, “IEC 61508” will be used for “IEC 61508 series”.

IEC 61508 (all parts), *Functional safety of electrical/electronic/programmable electronic safety-related systems*

IEC 61784-2, *Industrial communication networks – Profiles – Part 2: Additional fieldbus profiles for real-time networks based on ISO/IEC 8802-3*

IEC 61784-3:2010³, *Industrial communication networks – Profiles – Part 3: Functional safety fieldbuses – General rules and profile definitions*

IEC 61918, *Industrial communication networks – Installation of communication networks in industrial premises*

ISO/IEC 19501, *Information technology – Open Distributed Processing – Unified Modeling Language (UML) Version 1.4.2*

³ In preparation.