

© Copyright SEK. Reproduction in any form without permission is prohibited.

## Fastighetsnät för informationsöverföring – Generella kabelnät – Del 1: Allmänna fordringar

*Information technology –  
Generic cabling systems –  
Part 1: General requirements*

Som svensk standard gäller europastandarden EN 50173-1:2018. Den svenska standarden innehåller den officiella engelska språkversionen av EN 50173-1:2018.

### Nationellt förord

Tidigare fastställd svensk standard SS-EN 50173-1, utgåva 3, 2011, gäller ej fr o m 2021-03-19.

---

ICS 33.040.50

---

Denna standard är fastställd av SEK Svensk Elstandard, som också kan lämna upplysningar om **sakinnehållet** i standarden.  
Postadress: Box 1284, 164 29 KISTA  
Telefon: 08 - 444 14 00.  
E-post: [sek@elstandard.se](mailto:sek@elstandard.se). Internet: [www.elstandard.se](http://www.elstandard.se)

---

### *Standarder underlättar utvecklingen och höjer elsäkerheten*

Det finns många fördelar med att ha gemensamma tekniska regler för bl a mätning, säkerhet och provning och för utförande, skötsel och dokumentation av elprodukter och elanläggningar.

Genom att utforma sådana standarder blir säkerhetsfordringar tydliga och utvecklingskostnaderna rimliga samtidigt som marknadens acceptans för produkten eller tjänsten ökar.

Många standarder inom elområdet beskriver tekniska lösningar och metoder som åstadkommer den elsäkerhet som föreskrivs av svenska myndigheter och av EU.

### *SEK är Sveriges röst i standardiseringsarbetet inom elområdet*

SEK Svensk Elstandard svarar för standardiseringen inom elområdet i Sverige och samordnar svensk medverkan i internationell och europeisk standardisering. SEK är en ideell organisation med frivilligt deltagande från svenska myndigheter, företag och organisationer som vill medverka till och påverka utformningen av tekniska regler inom elektrotekniken.

SEK samordnar svenska intressenters medverkan i SEKs tekniska kommittéer och stödjer svenska experters medverkan i internationella och europeiska projekt.

### *Stora delar av arbetet sker internationellt*

Utformningen av standarder sker i allt väsentligt i internationellt och europeiskt samarbete. SEK är svensk nationalkommitté av International Electrotechnical Commission (IEC) och Comité Européen de Normalisation Electrotechnique (CENELEC).

Standardiseringsarbetet inom SEK är organiserat i referensgrupper bestående av ett antal tekniska kommittéer som speglar hur arbetet inom IEC och CENELEC är organiserat.

Arbetet i de tekniska kommittéerna är öppet för alla svenska organisationer, företag, institutioner, myndigheter och statliga verk. Den årliga avgiften för deltagandet och intäkter från försäljning finansierar SEKs standardiseringsverksamhet och medlemsavgift till IEC och CENELEC.

### *Var med och påverka!*

Den som deltar i SEKs tekniska kommittéarbete har möjlighet att påverka framtida standarder och får tidig tillgång till information och dokumentation om utvecklingen inom sitt teknikområde. Arbetet och kontakterna med kollegor, kunder och konkurrenter kan gynnsamt påverka enskilda företags affärsutveckling och bidrar till deltagarnas egen kompetensutveckling.

Du som vill dra nytta av dessa möjligheter är välkommen att kontakta SEKs kansli för mer information.

### **SEK Svensk Elstandard**

Box 1284  
164 29 Kista  
Tel 08-444 14 00  
[www.elstandard.se](http://www.elstandard.se)

English Version

## Information technology - Generic cabling systems - Part 1: General requirements

Technologies de l'information - Systèmes de câblage  
générique - Partie 1: Exigences générales

Informationstechnik - Anwendungsneutrale  
Kommunikationskabelanlagen - Teil 1: Allgemeine  
Anforderungen

This European Standard was approved by CENELEC on 2018-03-19. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization  
Comité Européen de Normalisation Electrotechnique  
Europäisches Komitee für Elektrotechnische Normung

**CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels**

| <b>Contents</b>   | <b>Page</b> |
|---|-------------|
| European foreword .....   | 12          |
| Introduction .....  | 13          |
| 1 Scope and conformance .....   | 15          |
| 1.1 Scope .....   | 15          |
| 1.2 Conformance .....   | 15          |
| 2 Normative references .....  | 16          |
| 3 Terms, definitions and abbreviations .....  | 22          |
| 3.1 Terms and definitions .....   | 22          |
| 3.2 Abbreviations .....   | 31          |
| 3.3 Symbols .....   | 33          |
| 4 Structure of generic backbone cabling .....   | 33          |
| 4.1 General .....   | 33          |
| 4.2 Functional elements .....   | 34          |
| 4.3 Structure and hierarchy .....   | 34          |
| 4.4 Cabling subsystems .....  | 36          |
| 4.5 Design objectives .....   | 36          |
| 4.6 Accommodation of functional elements .....  | 37          |
| 4.7 Interfaces .....  | 37          |
| 4.8 Dimensioning and configuring .....  | 38          |
| 5 Channel performance .....   | 39          |
| 5.1 Environmental performance .....   | 39          |
| 5.2 Transmission performance .....  | 41          |
| 6 Reference implementations for backbone cabling .....  | 75          |
| 6.1 General .....   | 75          |
| 6.2 Balanced cabling .....  | 75          |
| 6.3 Coaxial cabling .....   | 78          |
| 6.4 Optical fibre cabling .....   | 78          |
| 7 Cable requirements .....  | 78          |
| 7.1 General .....   | 78          |
| 7.2 Operating environment .....   | 79          |
| 7.3 Balanced cables of Categories 5, 6, 6A, 7, 7A, BCT-B, 8.1 and 8.2 .....                         | 79          |
| 7.4 Coaxial cables .....  | 81          |
| 7.5 Optical fibre cables .....  | 81          |
| 8 Connecting hardware requirements .....  | 83          |
| 8.1 General requirements .....  | 83          |
| 8.2 Category 5, 6, 6A, 7, 7A, BCT-B, 8.1 and 8.2 and connecting hardware for balanced cabling ..... | 88          |
| 8.3 Category BCT-C connecting hardware for coaxial cabling .....                                    | 94          |
| 8.4 Optical fibre connecting hardware .....   | 96          |
| 9 Requirements for cords and jumpers .....  | 99          |
| 9.1 General .....   | 99          |
| 9.2 Operating environment .....   | 99          |
| 9.3 Category 5, 6, 6A, 7, 7A, BCT-B, 8.1 and 8.2 cords for balanced cabling .....                   | 99          |
| 9.4 Coaxial cords .....   | 105         |
| 9.5 Optical fibre cords .....   | 105         |
| Annex A (normative) Link performance limits .....   | 107         |
| A.1 General .....   | 107         |

|                       |  |     |
|-----------------------|--|-----|
| A.2                   | Balanced cabling .....   | 107 |
| A.2.1                 | General.....   | 107 |
| A.2.2                 | Return loss .....  | 108 |
| A.2.3                 | Insertion loss .....   | 109 |
| A.2.4                 | Near-end crosstalk loss.....   | 110 |
| A.2.5                 | Attenuation to crosstalk loss ratio at the near-end.....   | 113 |
| A.2.6                 | Attenuation to crosstalk loss ratio at the far-end.....  | 113 |
| A.2.7                 | Direct current loop resistance .....   | 116 |
| A.2.8                 | Direct current resistance unbalance.....   | 116 |
| A.2.9                 | Propagation delay .....  | 117 |
| A.2.10                | Delay skew .....   | 118 |
| A.2.11                | Transverse conversion loss .....   | 119 |
| A.2.12                | Equal level transverse conversion transfer loss (ELTCTL).....  | 119 |
| A.2.13                | Coupling attenuation .....   | 119 |
| A.2.14                | Alien near-end crosstalk.....  | 120 |
| A.2.15                | Alien attenuation to crosstalk ratio at the far end.....   | 120 |
| A.3                   | Coaxial cabling .....  | 120 |
| A.3.1                 | Return loss .....  | 120 |
| A.3.2                 | Insertion loss .....   | 120 |
| A.3.3                 | Direct current loop resistance .....   | 120 |
| A.3.4                 | Direct current carrying capacity.....  | 121 |
| A.3.5                 | Operating voltage.....   | 121 |
| A.3.6                 | Screening attenuation .....  | 121 |
| A.4                   | Optical fibre cabling.....   | 121 |
| Annex B (informative) | Permanent link performance limits for maximum implementations (balanced and coaxial cabling) .....                         | 122 |
| B.1                   | Balanced cabling .....   | 122 |
| B.1.1                 | General.....   | 122 |
| B.1.2                 | Performance limits.....  | 122 |
| B.2                   | Coaxial cabling .....  | 128 |
| B.2.1                 | General.....   | 128 |
| B.2.2                 | Insertion loss .....   | 128 |
| B.2.3                 | Direct current loop resistance .....   | 128 |
| Annex C (informative) | Information on all-silica optical fibres in the previous edition .....   | 129 |
| C.1                   | Cabled singlemode optical fibres of Category OS1 .....   | 129 |
| C.2                   | Cabled multimode optical fibres of Category OM1 and OM2 .....  | 129 |
| C.2.1                 | Cable specification .....  | 129 |
| C.2.2                 | Application support.....   | 129 |
| Annex D (normative)   | Electrical, mechanical and environmental requirements of balanced connecting hardware .....                                | 132 |
| D.1                   | General.....   | 132 |
| D.2                   | Electrical performance of Category 5, 6, 6 <sub>A</sub> , 7, 7 <sub>A</sub> , BCT-B, 8.1 and 8.2 connecting hardware ..... | 132 |
| D.2.1                 | Return loss .....  | 132 |
| D.2.2                 | Insertion loss .....   | 133 |
| D.2.3                 | Near-end crosstalk loss.....   | 134 |
| D.2.4                 | Power sum near-end crosstalk loss .....  | 135 |
| D.2.5                 | Far-end crosstalk loss .....   | 136 |

## EN 50173-1:2018 (E)

|                       |  |     |
|-----------------------|--|-----|
| D.2.6                 | Power sum far-end crosstalk loss .....                                 | 137 |
| D.2.7                 | Input to output resistance .....                                       | 138 |
| D.2.8                 | Input to output resistance unbalance .....                             | 138 |
| D.2.9                 | Current carrying capacity .....  | 139 |
| D.2.10                | Propagation delay .....  | 139 |
| D.2.11                | Delay skew .....   | 140 |
| D.2.12                | Unbalance attenuation .....  | 140 |
| D.2.13                | Transfer impedance .....   | 142 |
| D.2.14                | Coupling attenuation .....   | 143 |
| D.2.15                | Dielectric performance .....   | 144 |
| D.2.16                | Power sum alien near-end crosstalk loss .....                          | 145 |
| D.2.17                | Power sum alien far-end crosstalk loss .....                           | 146 |
| D.3                   | Mechanical and environmental performance .....                         | 147 |
| D.3.1                 | General.....   | 147 |
| D.3.2                 | Solderless connections .....   | 147 |
| D.3.3                 | Free and fixed connectors (modular plugs and jacks) .....              | 148 |
| D.3.4                 | Other connecting hardware .....  | 149 |
| Annex E (informative) | Electromagnetic characteristics of balanced cabling.....               | 151 |
| Annex F (informative) | Supported applications .....   | 152 |
| F.1                   | Supported applications for balanced cabling .....                      | 152 |
| F.2                   | Supported applications for coaxial cabling.....                        | 156 |
| F.3                   | Supported applications for optical fibre cabling .....                 | 157 |
| F.3.1                 | Generic applications .....   | 157 |
| F.3.2                 | Data centre (computer room space) applications .....                   | 160 |
| F.3.3                 | Industrial space applications .....                                    | 162 |
| Annex G (informative) | Introduction to environmental classification .....                     | 163 |
| G.1                   | General.....   | 163 |
| G.2                   | The application of environmental classification.....                   | 163 |
| G.2.1                 | MICE .....   | 163 |
| G.2.2                 | The channel environment.....   | 163 |
| Figure G.1            | — Variation of the environment along a cabling channel.....            | 163 |
| Figure G.2            | — The local environment .....  | 164 |
| G.2.3                 | Component selection .....  | 164 |
| G.3                   | The MICE system.....   | 164 |
| G.4                   | Guidance with respect to environmental classification .....            | 170 |
| G.4.1                 | Mechanical environment .....   | 170 |
| G.4.2                 | Ingress protection environment.....                                    | 170 |
| G.4.3                 | Climatic and chemical environment .....                                | 170 |
| G.4.4                 | Electromagnetic environment.....                                       | 170 |
| Annex H (informative) | Acronyms for balanced cables .....                                     | 172 |
| Annex I (normative)   | Testing procedures to assess conformance with EN 50173 standards ..... | 174 |
| I.1                   | General.....   | 174 |
| I.2                   | Channel and link performance testing.....                              | 174 |
| I.2.1                 | General.....   | 174 |
| I.2.2                 | Testing balanced cabling channels and links.....                       | 175 |
| I.2.3                 | Testing optical fibre cabling channels and links.....                  | 175 |
| I.2.4                 | Channel and link test schedules .....                                  | 175 |

|   |     |
|---|-----|
| Bibliography .....  | 178 |
| <b>Figures</b>  |     |
| Figure 1 — Schematic relationship between the EN 50173 series and other relevant standards.....   | 13  |
| Figure 2 — Structure of generic cabling.....  | 34  |
| Figure 3 — Hierarchical structure of generic cabling .....  | 35  |
| Figure 4 — Interconnect and cross-connect models.....   | 35  |
| Figure 5 — Examples of backbone cabling implementations to improve reliability .....  | 37  |
| Figure 6 — Test and equipment interfaces for backbone cabling.....  | 38  |
| Figure 7 — Backbone cabling model .....   | 76  |
| Figure 8 — Pin grouping and pair assignments for EN 60603-7 series connecting hardware of Categories 5, 6, 6 <sub>A</sub> and 8.1 (front view of fixed connector).....      | 92  |
| Figure 9 — Pin grouping and pair assignments for EN 60603-7 series connecting hardware of Categories 7, 7 <sub>A</sub> , BCT-B and 8.2 (front view of fixed connector)..... | 92  |
| Figure 10 — Pin grouping and pair assignments for EN 61076-3-104 connecting hardware (front view of fixed connector) .....  | 93  |
| Figure 11 — Four position jack pin and pair grouping assignments for EN 61076-2-101 connecting hardware (front view of connector) .....                                     | 93  |
| Figure 12 — Four position jack pin and pair grouping assignments for EN 61076-2-109 connecting hardware (front view of fixed connector) .....                               | 94  |
| Figure 13 — Conductor assignment of EN 61169-2 (Type 9,52) and EN 61169-24 (Type F).....  | 96  |
| Figure 14 — Optical fibre assignments for connecting hardware for two optical fibres .....  | 98  |
| Figure 15 — Optical fibre assignments for connecting hardware for 12 and 24 optical fibres (front view of fixed or free connector).....                                     | 99  |
| Figure A.1 — Link options .....   | 107 |
| Figure G.1 — Variation of the environment along a cabling channel.....  | 163 |
| Figure G.2 — The local environment .....  | 164 |
| Figure G.3 — Noise Ranges of Common Industrial Machine Devices .....  | 171 |
| Figure H.1 — Balanced cable naming schema .....   | 172 |
| Figure H.2 — Balanced cable construction types .....  | 173 |

**Tables**

|  |    |
|--|----|
| Table 1 — Contextual relationship between EN 50173 series and other standards relevant for information technology cabling systems..... | 14 |
| Table 2 — Channel environments.....  | 39 |
| Table 3 — Details of Environmental Classification .....  | 40 |
| Table 4 — Formulae for RL limits for a channel.....  | 43 |
| Table 5 — RL limits for a channel at key frequencies.....  | 44 |
| Table 6 — Formulae for IL limits for a channel .....   | 45 |
| Table 7 — IL limits for a channel at key frequencies .....   | 46 |
| Table 8 — Formulae for NEXT limits for a channel.....  | 47 |
| Table 9 — NEXT limits for a channel at key frequencies.....  | 48 |
| Table 10 — Formulae for PSNEXT limits for a channel.....   | 49 |
| Table 11 — PSNEXT limits for a channel at key frequencies .....  | 50 |
| Table 12 — ACR-N limits for a channel at key frequencies .....   | 51 |
| Table 13 — PSACR-N limits for a channel at key frequencies .....   | 52 |
| Table 14 — Formulae for ACR-F limits for a channel .....   | 53 |
| Table 15 — ACR-F limits for a channel at key frequencies .....   | 54 |
| Table 16 — Formulae for PSACR-F limits for a channel .....   | 55 |
| Table 17 — PSACR-F limits for a channel at key frequencies.....  | 56 |
| Table 18 — DCLR limits for a channel.....  | 57 |
| Table 19 — d.c. resistance unbalance limits for a channel.....   | 57 |
| Table 20 — Formulae for propagation delay limits for a channel.....  | 59 |
| Table 21 — Propagation delay limits for a channel at key frequencies .....   | 59 |
| Table 22 — Delay skew limits for a channel .....   | 60 |
| Table 23 — Formulae for TCL limits for a cabling channel .....   | 61 |
| Table 24 — TCL limits for a cabling channel at key frequencies .....   | 62 |
| Table 25 — Formulae for ELTCTL limits for a cabling channel .....  | 64 |
| Table 26 — ELTCTL limits for a cabling channel at key frequencies .....  | 65 |
| Table 27 — Formulae for coupling attenuation limits for a screened cabling channel .....   | 66 |
| Table 28 — Coupling attenuation limits for a screened cabling channel at key frequencies.....  | 67 |



|  |    |
|--|----|
| Table 29 — Formulae for PSANEXT limits for a channel .....   | 68 |
| Table 30 — PSANEXT limits for a channel at key frequencies.....  | 69 |
| Table 31 — Formulae for coupling attenuation to meet PSANEXT limits.....   | 69 |
| Table 32 — Formulae for PSANEXT <sub>avg</sub> limits for a channel.....   | 70 |
| Table 33 — PSANEXT <sub>avg</sub> limits for a channel at key frequencies.....   | 70 |
| Table 34 — Formulae for PSAACR-F limits for a channel.....   | 71 |
| Table 35 — PSAACR-F limits for a channel at key frequencies .....  | 71 |
| Table 36 — Formulae for coupling attenuation to meet PSAACR limits.....  | 71 |
| Table 37 — Formulae for PSAACR-F <sub>avg</sub> limits for a channel.....  | 72 |
| Table 38 — PSAACR-F <sub>avg</sub> limits for a channel at key frequencies .....   | 72 |
| Table 39 — RL limits for a Class BCT-C channel.....  | 73 |
| Table 40 — Formulae for IL limits for a Class BCT-C channel .....  | 73 |
| Table 41 — IL limits for a Class BCT-C channel at key frequencies .....  | 73 |
| Table 42 — DCLR limits for a Class BCT-C channel.....  | 73 |
| Table 43 — Operating voltage limit for a Class BCT-C channel.....  | 74 |
| Table 44 — Screening attenuation limits for a Class BCT-C channel .....  | 74 |
| Table 45 — Backbone channel length equations.....  | 77 |
| Table 46 — Balanced cable standards .....  | 79 |
| Table 47 — Environmental performance specifications for balanced cables <sup>a</sup> .....   | 80 |
| Table 48 — Coupling attenuation limits for Category BCT-B cables .....   | 80 |
| Table 49 — Electrical performance requirements for Category BCT-C cable .....  | 81 |
| Table 50 — Mechanical performance requirements for Category BCT-C cable.....   | 81 |
| Table 51 — Environmental performance specifications for optical fibre cables (in addition to series EN 60794) <sup>a</sup> .....                         | 81 |
| Table 52 — Cabled multimode optical fibre performance requirements.....  | 82 |
| Table 53 — Cabled single-mode optical fibre performance requirements.....  | 83 |
| Table 54 — Environmental performance specifications for balanced cabling connecting hardware.....  | 85 |
| Table 55 — Environmental performance specifications for coaxial cabling connecting hardware .....  | 86 |
| Table 56 — Environmental performance specifications for optical fibre cabling connecting hardware.....   | 87 |
| Table 57 — Mechanical characteristics of connecting hardware intended for use with balanced cabling of Category 5, 6, 6A, 7, 7A, BCT-B, 8.1 and 8.2..... | 89 |

## EN 50173-1:2018 (E)

|  |     |
|--|-----|
| Table 58 — Backwards compatibility matrix.....   | 90  |
| Table 59 — EN 60603-7 series connecting hardware .....   | 91  |
| Table 60 — Formulae for RL limits for BCT-C connecting hardware.....                                       | 94  |
| Table 61 — RL limits for BCT-C connecting hardware at key frequencies.....                                 | 94  |
| Table 62 — Formulae for IL limits for BCT-C connecting hardware .....                                      | 95  |
| Table 63 — IL limits for BCT-C connecting hardware at key frequencies .....                                | 95  |
| Table 64 — Screening attenuation limits for BCT-C connecting hardware.....                                 | 95  |
| Table 65 — Attenuation limits for optical fibre connecting hardware .....                                  | 97  |
| Table 66 — RL limits for optical fibre connecting hardware.....  | 97  |
| Table 67 — Environmental performance specifications for balanced cords (in addition to IEC 61935-2-X) ..   | 100 |
| Table 68 — RL requirements for cords .....   | 101 |
| Table 69 — RL limits for cords at key frequencies.....   | 101 |
| Table 70 — Component performance formulae used to derive limits for cord NEXT .....                        | 103 |
| Table 71 — Minimum NEXT for 2 m cords at key frequencies .....   | 104 |
| Table 72 — Minimum NEXT for 5 m cords at key frequencies .....   | 104 |
| Table 73 — Minimum NEXT for 10 m cords at key frequencies .....  | 105 |
| Table 74 — Environmental performance specifications for optical fibre cords (in addition to EN 61753-1)... | 106 |
| Table A.1 — Formulae for RL limits for a link.....   | 108 |
| Table A.2 — Formulae for IL limits for a link .....  | 110 |
| Table A.3 — Formulae for NEXT limits for a link.....   | 111 |
| Table A.4 — Formulae for PSNEXT limits for a link.....   | 112 |
| Table A.5 — Formulae for ACR-F limits for a link .....   | 113 |
| Table A.6 — Formulae for PSACR-F limits for a link .....   | 115 |
| Table A.7 — DCLR limits for a link.....  | 116 |
| Table A.8 — d.c. resistance unbalance limits for a link.....   | 117 |
| Table A.9 — Propagation delay formulae for a link.....   | 118 |
| Table A.10 — Delay skew formulae for a link .....  | 119 |
| Table A.11 — Formulae for IL limits for a link .....   | 120 |
| Table B.1 — RL limits for a permanent link at key frequencies .....  | 122 |
| Table B.2 — IL limits for a permanent link at key frequencies.....   | 123 |

|   |     |
|---|-----|
| Table B.3 — NEXT limits for a permanent link at key frequencies .....                                     | 123 |
| Table B.4 — PSNEXT limits for a permanent link at key frequencies .....                                   | 124 |
| Table B.5 — ACR-N limits for a permanent link at key frequencies .....                                    | 124 |
| Table B.6 — PSACR-N limits for a permanent link at key frequencies.....                                   | 125 |
| Table B.7 — ACR-F limits for a permanent link at key frequencies.....                                     | 125 |
| Table B.8 — PSACR-F limits for a permanent link at key frequencies .....                                  | 126 |
| Table B.9 — DCLR limits for a permanent link.....   | 126 |
| Table B.10 — Propagation delay limits for a permanent link at key frequencies.....                        | 127 |
| Table B.11 — Delay skew limits for a permanent link.....  | 127 |
| Table B.12 — IL limits for a permanent link at key frequencies .....                                      | 128 |
| Table B.13 — DCLR limits for a permanent link.....  | 128 |
| Table C.1 — Cabled multimode optical fibre performance requirements .....                                 | 129 |
| Table C.2 — Supported generic ICT applications and maximum channel lengths.....                           | 130 |
| Table C.3 — Supported data centre applications and maximum channel lengths .....                          | 131 |
| Table C.4 — Supported monitoring and control applications and maximum channel lengths.....                | 131 |
| Table D.1 — Formulae for RL limits for connecting hardware .....  | 132 |
| Table D.2 — RL limits for connecting hardware at key frequencies .....                                    | 133 |
| Table D.3 — Formulae for IL limits for connecting hardware.....   | 133 |
| Table D.4 — IL limits for connecting hardware at key frequencies .....                                    | 134 |
| Table D.5 — Formulae for NEXT limits for connecting hardware .....  | 134 |
| Table D.6 — NEXT limits for connecting hardware at key frequencies .....                                  | 135 |
| Table D.7 — Formulae for PSNEXT limits for connecting hardware .....                                      | 135 |
| Table D.8 — PSNEXT limits for connecting hardware at key frequencies .....                                | 136 |
| Table D.9 — Formulae for FEXT limits for connecting hardware.....   | 136 |
| Table D.10 — FEXT limits for connecting hardware at key frequencies.....                                  | 137 |
| Table D.11 — Formulae for PSFEXT limits for connecting hardware.....                                      | 137 |
| Table D.12 — PSFEXT limits for connecting hardware at key frequencies.....                                | 138 |
| Table D.13 — Input to output resistance limits for connecting hardware at key frequencies .....           | 138 |
| Table D.14 — Input to output resistance unbalance limits for connecting hardware at key frequencies ..... | 139 |
| Table D.15 — Current carrying capacity limits for connecting hardware at key frequencies.....             | 139 |

## EN 50173-1:2018 (E)

|   |     |
|---|-----|
| Table D.16 — Propagation delay limits for connecting hardware .....   | 140 |
| Table D.17 — Delay skew limits for connecting hardware .....  | 140 |
| Table D.18 — Formulae for TCL limits for connecting hardware .....  | 141 |
| Table D.19 — TCL limits for connecting hardware at key frequencies .....  | 141 |
| Table D.20 — Formulae for TCTL limits for connecting hardware .....   | 142 |
| Table D.21 — TCTL limits for connecting hardware at key frequencies .....   | 142 |
| Table D.22 — Formulae for transfer impedance for connecting hardware .....  | 143 |
| Table D.23 — Transfer impedance limits for connecting hardware at key frequencies .....                                 | 143 |
| Table D.24 — Formulae for coupling attenuation limits for connecting hardware .....                                     | 144 |
| Table D.25 — Coupling attenuation limits for connecting hardware at key frequencies .....                               | 144 |
| Table D.26 — Insulation resistance limits for connecting hardware .....   | 145 |
| Table D.27 — Voltage proof limits for connecting hardware .....   | 145 |
| Table D.28 — Formulae for PSANEXT limits for connecting hardware .....  | 145 |
| Table D.29 — PSANEXT limits for connecting hardware at key frequencies .....  | 146 |
| Table D.30 — Formulae for PSAFEXT limits for connecting hardware .....  | 146 |
| Table D.31 — PSAFEXT limits for connecting hardware at key frequencies .....  | 146 |
| Table D.32 — Standards for solderless connections .....   | 147 |
| Table D.33 — Standards for free and fixed connectors (modular plugs and jacks) .....                                    | 148 |
| Table D.34 — Standards for M12 style connectors .....   | 148 |
| Table D.35 — Free and fixed connectors (modular plugs and jacks) operations matrix .....                                | 149 |
| Table D.36 — Reference for reliability testing of other connecting hardware .....                                       | 149 |
| Table D.37 — Other connecting hardware operations matrix .....  | 150 |
| Table F.1 — Supported ICT and BCT applications using balanced cabling .....   | 152 |
| Table F.2 — Modular connector pin assignment for ICT applications .....   | 155 |
| Table F.3 — Supported ICT and BCT applications using balanced cabling in industrial spaces .....                        | 156 |
| Table F.4 — Supported BCT applications using coaxial cabling .....  | 157 |
| Table F.5 — Maximum channel insertion loss and lengths for applications supported with multimode optical fibres .....   | 158 |
| Table F.6 — Maximum channel insertion loss and lengths for applications supported with single-mode optical fibres ..... | 159 |

|   |     |
|---|-----|
| Table F.7 — Maximum channel insertion loss and lengths for applications supported with multimode optical fibres in computer room spaces .....   | 160 |
| Table F.8 — Maximum channel insertion loss and lengths for applications supported with single-mode optical fibres in computer room spaces ..... | 161 |
| Table F.9 — Maximum channel insertion loss and lengths for applications supported with multimode optical fibres in industrial spaces .....      | 162 |
| Table F.10 — Maximum channel insertion loss and lengths for applications supported with single-mode optical fibres in industrial spaces.....    | 162 |
| Table G.1 — Derivation of boundaries for mechanical criteria in Table 3.....  | 165 |
| Table G.2 — Derivation of boundaries for ingress protection criteria in Table 3 .....   | 165 |
| Table G.3 — Derivation of boundaries for climatic and chemical criteria in Table 3.....   | 166 |
| Table G.4 — Derivation of boundaries chemical criteria in Table 3.....  | 167 |
| Table G.5 — Derivation of boundaries for electromagnetic criteria in Table 3 .....  | 170 |
| Table G.6 — Coupling mechanisms for common noise sources .....  | 171 |
| Table I.1 — Test regime for reference conformance and installation conformance of balanced cabling to EN 50173 series standards .....           | 175 |
| Table I.2 — Test regime for reference conformance and installation conformance to EN 50173 series standards – Optical fibre cabling.....        | 177 |

## European foreword

This document (EN 50173-1:2018) was prepared by CLC/TC 215, "*Electrotechnical aspects of telecommunication equipment*".

The following dates are fixed:

- latest date by which this document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2019-03-19
- latest date by which the national standards conflicting with this document have to be withdrawn (dow) 2021-03-19

This document supersedes EN 50173-1:2011.

The first edition of EN 50173-1, published in 2002, has been developed to enable the application-independent cabling to support ICT applications in office premises. Their basic principles, however, are applicable to other types of applications and in other types of premises.

This edition of EN 50173-1:

- a) introduces new balanced cabling component Categories 8.1 and 8.2 to support new channel Classes I and II;
- b) removes balanced cabling components and channel Class CCCB;
- c) removes the optical fibre Classes concept;
- d) defines a new cabled optical fibre Category OM5;
- e) updates Annex F "Supported applications";
- f) amends various other subclauses, tables and figures.

TC 215 has decided to establish relevant European Standards which address the specific requirements of these premises. In order to point out the commonalities of these cabling design standards, these ENs are published as individual parts of the series EN 50173, thus also acknowledging that standards users recognize the designation "EN 50173" as a synonym for generic cabling design.

At the time of publication of this European Standard, series EN 50173 comprises the following standards:

|            |  |
|------------|--|
| EN 50173-1 | Information technology – Generic cabling systems – Part 1: General requirements          |
| EN 50173-2 | Information technology – Generic cabling systems – Part 2: Office spaces                 |
| EN 50173-3 | Information technology – Generic cabling systems – Part 3: Industrial spaces             |
| EN 50173-4 | Information technology – Generic cabling systems – Part 4: Homes                         |
| EN 50173-5 | Information technology – Generic cabling systems – Part 5: Data centre spaces            |
| EN 50173-6 | Information technology – Generic cabling systems – Part 6: Distributed building services |

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.


## Introduction

This European Standard contains general requirements in support of the other standards in the EN 50173 series.

It should be noted that generic cabling is a passive system and cannot be tested for EMC compliance individually. Application-specific equipment, designed for one or more cabling media, is required to meet relevant EMC standards on those media. Care should be taken that the installation of any of those media in a cabling system does not degrade the characteristics of the system. The installation methods of EN 50174 series should be used to minimise the effect of electromagnetic disturbances. For EMC requirements of BCT cabling see EN 50083-8.

Figure 1 and Table 1 show the schematic and contextual relationships between the standards produced by TC 215 for information technology cabling, namely:

- 1) this and other parts of the EN 50173 series;
- 2) installation (EN 50174 series);
- 3) bonding (EN 50310).

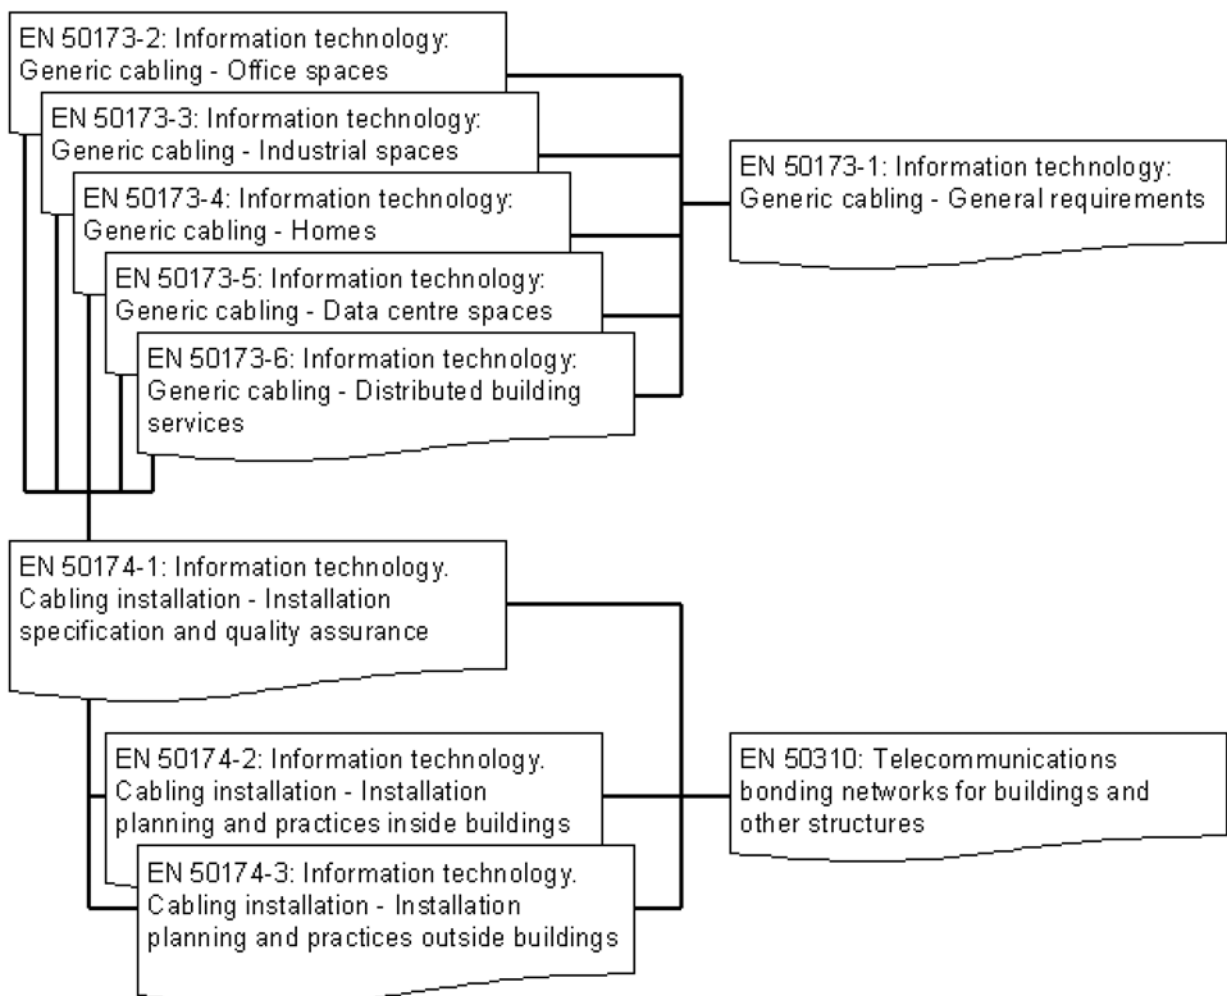

**Figure 1 — Schematic relationship between the EN 50173 series and other relevant standards**

**Table 1 — Contextual relationship between EN 50173 series and other standards relevant for information technology cabling systems**

| Building design phase | Generic cabling design phase   | Specification phase                  | Installation phase                   | Operation phase |
|-----------------------|--|--------------------------------------|--------------------------------------|-----------------|
| EN 50310              | EN 50173-2<br>EN 50173-3<br>EN 50173-4<br>EN 50173-5<br>EN 50173-6<br>(these ENs reference general requirements of EN 50173-1) | EN 50174-1                           | EN 50174-2<br>EN 50174-3<br>EN 50310 | EN 50174-1      |
|                       |  | Planning phase                       |                                      |                 |
|                       |  | EN 50174-2<br>EN 50174-3<br>EN 50310 |                                      |                 |

In addition, a number of Technical Reports have been developed to support or extend the application of these standards, including:

- CLC/TR 50173-99-1, *Cabling guidelines in support of 10 GBASE-T*;
- CLC/TR 50173-99-2, *Information technology — Implementation of BCT applications using cabling in accordance with EN 50173-4*;
- CLC/TR 50173-99-3, *Information technology — Generic cabling systems — Part 99-3: Home cabling infrastructures up to 50 m in length to support simultaneous and non simultaneous provision of applications*.

In addition, a number of cabling design standards have been developed using components of EN 50173-1 (e.g. EN 50098 series and EN 50700).



## 1 Scope and conformance

### 1.1 Scope

This European Standard specifies:

- a) the structure and configuration of the backbone cabling subsystems of generic cabling systems within the types of premises and/or spaces defined by the other standards in the EN 50173 series;
- b) channel transmission and environmental performance requirements in support of the standards in the EN 50173 series (which have taken into account requirements specified in application standards listed in Annex F);
- c) link performance requirements in support of the standards in the EN 50173 series;
- d) backbone cabling reference implementations in support of the standards in the EN 50173 series;
- e) component performance requirements in support of the standards in the EN 50173 series;
- f) test procedures to verify conformance to the cabling transmission performance requirements of the standards in the EN 50173 series.

Safety and electromagnetic compatibility (EMC) requirements are outside the scope of this European Standard and are covered by other standards and regulations. However, information given in this European Standard can be of assistance in meeting these standards and regulations.

### 1.2 Conformance

This European Standard does not contain specific conformance requirements. The other standards in the EN 50173 series incorporate the requirements of this standard as part of their individual conformance requirements.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 50083 (all parts), *Cable networks for television signals, sound signals and interactive services*

NOTE EN 50083 series is gradually replaced by EN 60728 series.

EN 50117-1, *Coaxial cables - Part 1: Generic specification*

EN 50117-4-1, *Coaxial cables - Part 4-1: Sectional specification for cables for BCT cabling in accordance with EN 50173 - Indoor drop cables for systems operating at 5 MHz - 3 000 MHz*

EN 50174-1, *Information technology - Cabling installation - Part 1: Installation specification and quality assurance*

EN 50174-2, *Information technology - Cabling installation - Part 2: Installation planning and practices inside buildings*

EN 50174-3, *Information technology - Cabling installation - Part 3: Installation planning and practices outside buildings*

EN 50288-1, *Multi-element metallic cables used in analogue and digital communication and control - Part 1: Generic specification*

EN 50288-2-1, *Multi-element metallic cables used in analogue and digital communication and control - Part 2-1: Sectional specification for screened cables characterised up to 100 MHz - Horizontal and building backbone cables*

EN 50288-2-2, *Multi-element metallic cables used in analogue and digital communication and control - Part 2-2: Sectional specification for screened cables characterised up to 100 MHz - Work area and patch cord cables*

EN 50288-3-1, *Multi-element metallic cables used in analogue and digital communication and control - Part 3-1: Sectional specification for unscreened cables characterised up to 100 MHz - Horizontal and building backbone cables*

EN 50288-3-2, *Multi-element metallic cables used in analogue and digital communication and control - Part 3-2: Sectional specification for unscreened cables characterised up to 100 MHz - Work area and patch cord cables*

EN 50288-4-1, *Multi-element metallic cables used in analogue and digital communication and control - Part 4-1: Sectional specification for screened cables characterised up to 600 MHz - Horizontal and building backbone cables*

EN 50288-4-2, *Multi-element metallic cables used in analogue and digital communication and control - Part 4-2: Sectional specification for screened cables characterised up to 600 MHz - Work area and patch cord cables*

EN 50288-5-1, *Multi-element metallic cables used in analogue and digital communication and control - Part 5-1: Sectional specification for screened cables characterized up to 250 MHz - Horizontal and building backbone cables*

EN 50288-5-2, *Multi-element metallic cables used in analogue and digital communication and control - Part 5-2: Sectional specification for screened cables characterized up to 250 MHz - Work area and patch cord cables*

EN 50288-6-1, *Multi-element metallic cables used in analogue and digital communication and control - Part 6-1: Sectional specification for unscreened cables characterised up to 250 MHz - Horizontal and building backbone cables*

EN 50288-6-2, *Multi-element metallic cables used in analogue and digital communication and control - Part 6-2: Sectional specification for unscreened cables characterised up to 250 MHz - Work area and patch cord cables*

EN 50288-9-1, *Multi-element metallic cables used in analogue and digital communication and control - Part 9-1: Sectional specification for screened cables characterised up to 1 000 MHz - Horizontal and building backbone cables*

EN 50288-9-2, *Multi-element metallic cables used in analogue and digital communication and control - Part 9-2: Sectional specification for screened cables characterized from 1 MHz up to 1 000 MHz for work area, patch cord and data centre applications*

EN 50288-10-1, *Multi-element metallic cables used in analogue and digital communication and control - Part 10-1: Sectional specification for screened cables characterized up to 500 MHz - Horizontal floor and building backbone cables*

EN 50288-10-2, *Multi-element metallic cables used in analogue and digital communication and control - Part 10-2: Sectional specification for screened cables characterized from 1 MHz up to 500 MHz for work area, patch cord and data centre applications*

EN 50288-11-1, *Multi-element metallic cables used in analogue and digital communication and control - Part 11-1: Sectional specification for un-screened cables characterised up to 500 MHz - Horizontal and building backbone cables*

EN 50288-11-2, *Multi-element metallic cables used in analogue and digital communication and control - Part 11-2: Sectional specification for un-screened cables, characterized from 1 MHz up to 500 MHz for work area, patch cord and data centre applications*

EN 50288-12-1, *Multi-element metallic cables used in analogue and digital communications and control - Part 12-1: Sectional specification for screened cables characterised from 1 MHz up to 2 000 MHz - Horizontal and building backbone cables*

EN 50288-12-2, <sup>1)</sup>, *Multi-element metallic cables used in analogue and digital communication and control – Part 12-2: Sectional specification for screened cables characterised from 1 MHz up to 2 000 MHz - Work area cables*

EN 50288-13-1 <sup>1)</sup>, *Multi-element metallic cables used in analogue and digital communication and control – Part 13-1: Sectional specification for outer screened cables characterised up to 2000 MHz - Horizontal and building backbone cables*

EN 50288-13-2 <sup>1)</sup>, *Multi-element metallic cables used in analogue and digital communication and control – Part 13-2: Sectional specification for outer screened cables characterised from 1 MHz up to 2000 MHz - Work Area cables*

EN 50289-1-11, *Communication cables – Specifications for test methods – Part 1-11: Electrical test methods – Characteristic impedance, input impedance, return loss*

EN 50289-1-14, *Communication cables - Specifications for test methods - Part 1-14: Electrical test methods - Coupling attenuation or screening attenuation of connecting hardware*

EN 60352-2, *Solderless connections - Part 2: Crimped connections - General requirements, test methods and practical guidance*

---

<sup>1)</sup> In preparation by CLC/SC 46XC.

## **EN 50173-1:2018 (E)**

EN 60352-3, *Solderless connections - Part 3: Solderless accessible insulation displacement connections - General requirements, test methods and practical guidance*

EN 60352-4, *Solderless connections - Part 4: Solderless non-accessible insulation displacement connections - General requirements, test methods and practical guidance*

EN 60352-5, *Solderless connections - Part 5: Press-in connections - General requirements, test methods and practical guidance*

EN 60352-6, *Solderless connections - Part 6: Insulation piercing connections - General requirements, test methods and practical guidance*

EN 60352-7, *Solderless connections - Part 7: Spring clamp connections - General requirements, test methods and practical guidance*

EN 60352-8, *Solderless connections - Part 8: Compression mount connections - General requirements, test methods and practical guidance*

EN 60512-3-1, *Connectors for electronic equipment - Tests and measurements - Part 3-1: Insulation tests - Test 3a: Insulation resistance*

EN 60512-4-1, *Connectors for electronic equipment - Tests and measurements - Part 4-1: Voltage stress tests - Test 4a: Voltage proof*

EN 60512-4-2, *Connectors for electronic equipment - Tests and measurements - Part 4-2: Voltage stress tests - Test 4b: Partial discharge*

EN 60512-6-2, *Connectors for electronic equipment - Tests and measurements - Part 6-2: Dynamic stress tests - Test 6b: Bump*

EN 60512-6-3, *Connectors for electronic equipment - Tests and measurements - Part 6-3: Dynamic stress tests - Test 6c: Shock*

EN 60512-6-4, *Connectors for electronic equipment - Tests and measurements - Part 6-4: Dynamic stress tests - Test 6d: Vibration (sinusoidal)*

EN 60512-11-4, *Connectors for electronic equipment - Tests and measurements - Part 11-4: Climatic tests - Test 11d: Rapid change of temperature*

EN 60512-11-7, *Connectors for electronic equipment - Tests and measurements - Part 11- 7: Climatic tests - Test 11g: Flowing mixed gas corrosion test*

EN 60512-11-9, *Connectors for electronic equipment - Tests and measurements - Part 11-9: Climatic tests - Test 11i: Dry heat*

EN 60512-11-10, *Connectors for electronic equipment - Tests and measurements - Part 11-10: Climatic tests - Test 11j: Cold*

EN 60512-11-12, *Connectors for electronic equipment - Tests and measurements - Part 11-12: Climatic tests - Test 11m: Damp heat, cyclic*

EN 60512-16-4, *Connectors for electronic equipment - Tests and measurements - Part 16-4: Mechanical tests on contacts and terminations - Test 16d: Tensile strength (crimped connections)*

EN 60512-17-2, *Connectors for electronic equipment - Tests and measurements - Part 17-2: Cable clamping tests - Test 17b: Cable clamp resistance to cable rotation*

EN 60512-17-4, *Connectors for electronic equipment - Tests and measurements - Part 17-4: Cable clamping tests - Test 17d: Cable clamp resistance to cable torsion*

- EN 60512-19-3, *Electromechanical components for electronic equipment - Basic testing procedures and measuring methods - Part 19: Chemical resistance tests - Section 3: Test 19c - Fluid resistance*
- EN 60512-23-3, *Electromechanical components for electronic equipment - Basic testing procedures and measuring methods - Part 23-3: Test 23c: Shielding effectiveness of connectors and accessories*
- EN 60512-25-1, *Connectors for electronic equipment - Tests and measurements - Part 25-1: Test 25a - Crosstalk ratio*
- EN 60512-25-2, *Connectors for electronic equipment - Tests and measurements - Part 25-2: Test 25b: Attenuation (insertion loss)*
- EN 60512-25-4, *Connectors for electronic equipment - Tests and measurements - Part 25-4: Test 25d - Propagation delay*
- EN 60512-25-5, *Connectors for electronic equipment - Tests and measurements - Part 25-5: Test 25e - Return loss*
- EN 60512-25-9, *Connectors for electronic equipment - Tests and measurements - Part 25-9: Signal integrity tests - Test 25i: Alien crosstalk*
- EN 60512-26-100, *Connectors for electronic equipment - Tests and measurements - Part 26-100: Measurement setup, test and reference arrangements and measurements for connectors according to IEC 60603-7 - Tests 26a to 26g*
- EN 60529, *Degrees of protection provided by enclosures (IP Code)*
- EN 60603-7:2009, *Connectors for electronic equipment - Part 7: Detail specification for 8-way, unshielded, free and fixed connectors*
- EN 60603-7-1, *Connectors for electronic equipment - Part 7-1: Detail specification for 8-way, shielded, free and fixed connectors*
- EN 60603-7-2, *Connectors for electronic equipment - Part 7-2: Detail specification for 8-way, unshielded, free and fixed connectors, for data transmissions with frequencies up to 100 MHz*
- EN 60603-7-3, *Connectors for electronic equipment - Part 7-3: Detail specification for 8-way, shielded, free and fixed connectors, for data transmission with frequencies up to 100 MHz*
- EN 60603-7-4, *Connectors for electronic equipment - Part 7-4: Detail specification for 8-way, unshielded, free and fixed connectors, for data transmissions with frequencies up to 250 MHz*
- EN 60603-7-41, *Connectors for electronic equipment - Part 7-41: Detail specification for 8-way, unshielded, free and fixed connectors, for data transmissions with frequencies up to 500 MHz*
- EN 60603-7-5, *Connectors for electronic equipment - Part 7-5: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 250 MHz*
- EN 60603-7-51, *Connectors for electronic equipment - Part 7-51: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 500 MHz*
- EN 60603-7-7, *Connectors for electronic equipment - Part 7-7: Detail specification for 8-way, shielded, free and fixed connectors for data transmission with frequencies up to 600 MHz*
- EN 60603-7-71, *Connectors for electronic equipment - Part 7-71: Detail specification for 8-way, shielded, free and fixed connectors, for data transmission with frequencies up to 1 000 MHz*
- EN 60603-7-81, *Connectors for electronic equipment - Part 7-81: Detail specification for 8-way, shielded, free and fixed connectors, for data transmissions with frequencies up to 2 000 MHz*

## **EN 50173-1:2018 (E)**

EN 60603-7-82, *Connectors for electronic equipment - Part 7-82: Detail specification for 8-way, 12 contacts, shielded, free and fixed connectors, for data transmission with frequencies up to 2 000 MHz*

EN 60793-1-40, *Optical fibres - Part 1-40: Measurement methods and test procedures - Attenuation*

EN 60793-1-44, *Optical fibres - Part 1-44: Measurement methods and test procedures - Cut-off wavelength*

EN 60793-2, *Optical fibres – Part 2: Product specifications – General (IEC 60793-2)*

EN 60793-2-10, *Optical fibres – Part 2-10: Product specifications – Sectional specification for category A1 multimode fibres (IEC 60793-2-10)*

EN 60793-2-50:2016, *Optical fibres - Part 2-50: Product specifications - Sectional specification for class B single-mode fibres*

EN 60794-1-1, *Optical fibre cables – Part 1-1: Generic specification – General (IEC 60794-1-1)*

EN 60794-1-21, *Optical fibre cables - Part 1-21: Generic specification - Basic optical cable test procedures - Mechanical tests methods*

EN 60794-2, (all parts), *Optical fibre cables – Part 2: Indoor optical fibre cables – Sectional specification (IEC 60794-2 (all parts))*

EN 60794-2-51, *Optical fibre cables - Part 2-51: Indoor cables - Detail specification for simplex and duplex cables for use in cords for controlled environment*

EN 60811-1-1:1995, *Insulating and sheathing of electric cables – Common test methods – Part 1: General application – Section 1: Measurement of thickness and overall dimensions – Tests for determining the mechanical properties (IEC 60811-1-1:1993)*

EN 60825-2, *Safety of laser products - Part 2: Safety of optical fibre communication systems (OFCS)*

EN 60966-2-4, *Radio frequency and coaxial cable assemblies – Part 2-4: Detail specification for cable assemblies for radio and TV receivers – Frequency range 0 MHz to 3000 MHz, IEC 61169-2 connectors (IEC 60966-2-4)*

EN 60966-2-5, *Radio frequency and coaxial cable assemblies – Part 2-5: Detail specification for cable assemblies for radio and TV receivers – Frequency range 0 MHz to 1 000 MHz, IEC 61169-2 connectors (IEC 60966-2-5)*

EN 60966-2-6, *Radio frequency and coaxial cable assemblies – Part 2-6: Detail specification for cable assemblies for radio and TV receivers – Frequency range 0 MHz to 3 000 MHz, IEC 61169-24 connectors (IEC 60966-2-6)*

EN 61076-2-101, *Connectors for electronic equipment - Product requirements - Part 2-101: Circular connectors - Detail specification for M12 connectors with screw-locking*

EN 61076-2-109, *Connectors for electronic equipment - Product requirements - Part 2-109: Circular connectors - Detail specification for connectors with M 12 × 1 screw-locking, for data transmission frequencies up to 500 MHz*

EN 61076-3-104, *Connectors for electronic equipment – Product requirements – Part 3-104: – Detail specification for 8-way, shielded free and fixed connectors, for data transmissions with frequencies up to 1 000 MHz (IEC 61076-3-104)*

EN 61076-3-110, *Connectors for electronic equipment - Product requirements - Part 3-110: Detail specification for shielded, free and fixed connectors for data transmission with frequencies up to 1 000 MHz (IEC 61076-3-110)*

- EN 61169-1, *Radio-frequency connectors - Part 1: Generic specification - General requirements and measuring methods*
- EN 61169-2, *Radio-frequency connectors - Part 2: Sectional specification - Radio frequency coaxial connectors of type 9,52*
- EN 61169-24, *Radio-frequency connectors - Part 24: Sectional specification - Radio frequency coaxial connectors with screw coupling, typically for use in 75 ohm cable networks (type F)*
- EN 61280-4-1, *Fibre optic communication subsystem test procedures - Part 4-1: Installed cable plant - Multimode attenuation measurement*
- EN 61280-4-2, *Fibre-optic communication subsystem test procedures - Part 4-2: Installed cable plant - Single-mode attenuation and optical return loss measurement*
- EN 61300-2-1, *Fibre optic interconnecting devices and passive components - Basic test and measurement procedures - Part 2-1: Tests - Vibration (sinusoidal)*
- EN 61300-2-4, *Fibre optic interconnecting devices and passive components - Basic test and measurement procedures - Part 2-4: Tests - Fibre/cable retention*
- EN 61300-2-5, *Fibre optic interconnecting devices and passive components - Basic test and measurement procedures - Part 2-5: Tests - Torsion*
- EN 61300-2-9, *Fibre optic interconnecting devices and passive components - Basic test and measurement procedures - Part 2-9: Tests - Shock*
- EN 61300-2-18, *Fibre optic interconnecting devices and passive components - Basic test and measurement procedures - Part 2-18: Tests - Dry heat - High temperature endurance*
- EN 61300-2-22, *Fibre optic interconnecting devices and passive components - Basic test and measurement procedures - Part 2-22: Tests - Change of temperature*
- EN 61300-2-34, *Fibre optic interconnecting devices and passive components - Basic test and measurement procedures - Part 2-34: Tests - Resistance to solvents and contaminating fluids of interconnecting components and closures*
- EN 61300-2-44, *Fibre optic interconnecting devices and passive components - Basic test and measurement procedures - Part 2-44: Tests - Flexing of the strain relief of fibre optic devices*
- EN 61300-2-46, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-46: Tests – Damp heat cyclic (IEC 61300-2-46)*
- prEN 61753-1:2017, *Fibre optic interconnecting devices and passive components - Performance standards - Part 1: General and guidance*
- EN 61753-022-2, *Fibre optic interconnecting devices and passive components - Performance standard - Part 022-2: Fibre optic connectors terminated on multimode fibre for category C - Controlled environment*
- EN 61754 (all parts), *Fibre optic interconnecting devices and passive components - Fibre optic connector interfaces (IEC 61754 (all parts))*
- EN 61935-1, *Specification for the testing of balanced and coaxial information technology cabling - Part 1: Installed balanced cabling as specified in the standards series EN 50173*
- EN 61935-2, *Specification for the testing of balanced and coaxial information technology cabling - Part 2: Cords as specified in ISO/IEC 11801 and related standards*

## **EN 50173-1:2018 (E)**

EN 61935-2-20, *Testing of balanced communication cabling in accordance with series EN 50173 - Part 2-20: Patch cords and work area cords - Blank detail specification for class D applications*

EN 62012-1, *Multicore and symmetrical pair/quad cables for digital communications to be used in harsh environments - Part 1: Generic specification*

IEC 61156-7, *Multicore and symmetrical pair/quad cables for digital communications – Part 7: Symmetrical pair cables with transmission characteristics up to 1 200 MHz – Sectional specification for digital and analog communication cables*

IEC 61935-2-X (all parts), *Testing of balanced communication cabling in accordance with ISO/IEC 11801 – Part 2-X*

IEC 62153-4-15, *Metallic Communication Cable test methods - Part 4-15: Electromagnetic compatibility (EMC) - Test method for measuring transfer impedance and screening attenuation or coupling attenuation with triaxial cell*