

© Copyright SEK. Reproduction in any form without permission is prohibited.

Varvtalsstyrda elektriska drivsystem – Del 7-1: Generellt gränssnitt och användning av profiler för drivsystem – Definition av gränssnitt

*Adjustable speed electrical power drive systems –
Part 7-1: Generic interface and use of profiles for power drive systems –
Interface definition*

Som svensk standard gäller europastandarden EN 61800-7-1:2016. Den svenska standarden innehåller den officiella engelska språkversionen av EN 61800-7-1:2016.

Nationellt förord

Europastandarden EN 61800-7-1:2016

består av:

- **europastandardens ikraftsättningsdokument**, utarbetat inom CENELEC
- **IEC 61800-7-1, Second edition, 2015 - Adjustable speed electrical power drive systems - Part 7-1: Generic interface and use of profiles for power drive systems - Interface definition**

utarbetad inom International Electrotechnical Commission, IEC.

Tidigare fastställd svensk standard SS-EN 61800-7-1, utgåva 1, 2008, gäller ej fr o m 2018-12-25.

ICS 29.200.00; 35.100.05

Standarder underlättar utvecklingen och höjer elsäkerheten

Det finns många fördelar med att ha gemensamma tekniska regler för bl a mätning, säkerhet och provning och för utförande, skötsel och dokumentation av elprodukter och elanläggningar.

Genom att utforma sådana standarder blir säkerhetsfordringar tydliga och utvecklingskostnaderna rimliga samtidigt som marknadens acceptans för produkten eller tjänsten ökar.

Många standarder inom elområdet beskriver tekniska lösningar och metoder som åstadkommer den elsäkerhet som föreskrivs av svenska myndigheter och av EU.

SEK är Sveriges röst i standardiseringsarbetet inom elområdet

SEK Svensk Elstandard svarar för standardiseringen inom elområdet i Sverige och samordnar svensk medverkan i internationell och europeisk standardisering. SEK är en ideell organisation med frivilligt deltagande från svenska myndigheter, företag och organisationer som vill medverka till och påverka utformningen av tekniska regler inom elektrotekniken.

SEK samordnar svenska intressenters medverkan i SEKs tekniska kommittéer och stödjer svenska experters medverkan i internationella och europeiska projekt.

Stora delar av arbetet sker internationellt

Utformningen av standarder sker i allt väsentligt i internationellt och europeiskt samarbete. SEK är svensk nationalkommitté av International Electrotechnical Commission (IEC) och Comité Européen de Normalisation Electrotechnique (CENELEC).

Standardiseringsarbetet inom SEK är organiserat i referensgrupper bestående av ett antal tekniska kommittéer som speglar hur arbetet inom IEC och CENELEC är organiserat.

Arbetet i de tekniska kommittéerna är öppet för alla svenska organisationer, företag, institutioner, myndigheter och statliga verk. Den årliga avgiften för deltagandet och intäkter från försäljning finansierar SEKs standardiseringsverksamhet och medlemsavgift till IEC och CENELEC.

Var med och påverka!

Den som deltar i SEKs tekniska kommittéarbete har möjlighet att påverka framtida standarder och får tidig tillgång till information och dokumentation om utvecklingen inom sitt teknikområde. Arbetet och kontakterna med kollegor, kunder och konkurrenter kan gynnsamt påverka enskilda företags affärsutveckling och bidrar till deltagarnas egen kompetensutveckling.

Du som vill dra nytta av dessa möjligheter är välkommen att kontakta SEKs kansli för mer information.

SEK Svensk Elstandard

Box 1284
164 29 Kista
Tel 08-444 14 00
www.elstandard.se

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 61800-7-1

February 2016

ICS 29.200; 35.100.05

Supersedes EN 61800-7-1:2008

English Version

**Adjustable speed electrical power drive systems -
Part 7-1: Generic interface and use of profiles for power drive
systems - Interface definition
(IEC 61800-7-1:2015)**

Entraînements électriques de puissance à vitesse variable -
Partie 7-1: Interface générique et utilisation de profils pour
les entraînements électriques de puissance - Définition de
l'interface
(IEC 61800-7-1:2015)

Elektrische Leistungsantriebssysteme mit einstellbarer
Drehzahl - Teil 7-1: Generisches Interface und Nutzung von
Profilen für Leistungsantriebssysteme (PDS) -
Schnittstellendefinition
(IEC 61800-7-1:2015)

This European Standard was approved by CENELEC on 2015-12-25. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

European foreword

The text of document 22G/306/FDIS, future edition 2 of IEC 61800-7-1, prepared by SC 22G "Adjustable speed electric drive systems incorporating semiconductor power converters" of IEC/TC 22 "Power electronic systems and equipment" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 61800-7-1:2016.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2016-09-25
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2018-12-25

This document supersedes EN 61800-7-1:2008.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 61800-7-1:2015 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

| | | |
|------------------|------|---|
| IEC 61131-3 | NOTE | Harmonized as EN 61131-3. |
| IEC 61158 Series | NOTE | Harmonized as EN 61158 Series. |
| IEC 61158-5-12 | NOTE | Harmonized as EN 61158-5-12. |
| IEC 61158-5-13 | NOTE | Harmonized as EN 61158-5-13. |
| IEC 61158-5-14 | NOTE | Harmonized as EN 61158-5-14. |
| IEC 61158-5-16 | NOTE | Harmonized as EN 61158-5-16. |
| IEC 61158-5-19 | NOTE | Harmonized as EN 61158-5-19. |
| IEC 61158-5-23 | NOTE | Harmonized as EN 61158-5-23. |
| IEC 61158-6-12 | NOTE | Harmonized as EN 61158-6-12. |
| IEC 61158-6-13 | NOTE | Harmonized as EN 61158-6-13. |
| IEC 61158-6-14 | NOTE | Harmonized as EN 61158-6-14. |
| IEC 61158-6-16 | NOTE | Harmonized as EN 61158-6-16. |
| IEC 61158-6-19 | NOTE | Harmonized as EN 61158-6-19. |
| IEC 61158-6-23 | NOTE | Harmonized as EN 61158-6-23. |
| IEC 61499-1:2012 | NOTE | Harmonized as EN 61499-1:2013 (not modified). |
| IEC 61784-1 | NOTE | Harmonized as EN 61784-1. |
| IEC 61784-2 | NOTE | Harmonized as EN 61784-2 |
| IEC 61800 Series | NOTE | Harmonized as EN 61800 Series. |
| IEC 61800-4:2002 | NOTE | Harmonized as EN 61800-4:2003 (not modified). |
| IEC 61800-7-301 | NOTE | Harmonized as EN 61800-7-301. |
| IEC 61800-7-302 | NOTE | Harmonized as EN 61800-7-302. |
| IEC 61800-7-303 | NOTE | Harmonized as EN 61800-7-303. |
| IEC 62026-3 | NOTE | Harmonized as EN 62026-3. |

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 When an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu

| <u>Publication</u> | <u>Year</u> | <u>Title</u> | <u>EN/HD</u> | <u>Year</u> |
|--------------------|-------------|--|---------------|-------------|
| - | - | Industrial communications subsystem based on ISO 11898 (CAN) for controller-device interfaces - Part 4: CANopen | EN 50325-4 | - |
| IEC 61158-5-2 | - | Industrial communication networks - Fieldbus specifications - Part 5-2: Application layer service definition - Type 2 elements | EN 61158-5-2 | - |
| IEC 61158-5-3 | - | Industrial communication networks - Fieldbus specifications - Part 5-3: Application layer service definition - Type 3 elements | EN 61158-5-3 | - |
| IEC 61158-5-10 | - | Industrial communication networks - Fieldbus specifications - Part 5-10: Application layer service definition - Type 10 elements | EN 61158-5-10 | - |
| IEC 61158-6-2 | - | Industrial communication networks - Fieldbus specifications - Part 6-2: Application layer protocol specification - Type 2 elements | EN 61158-6-2 | - |
| IEC 61158-6-3 | - | Industrial communication networks - Fieldbus specifications - Part 6-3: Application layer protocol specification - Type 3 elements | EN 61158-6-3 | - |
| IEC 61158-6-10 | - | Industrial communication networks - Fieldbus specifications - Part 6-10: Application layer protocol specification - Type 10 elements | EN 61158-6-10 | - |
| IEC 61800-7 | Series | Adjustable speed electrical power drive systems - Part 7: Generic interface and use of profiles for power drive systems | EN 61800-7 | Series |

| <u>Publication</u> | <u>Year</u> | <u>Title</u> | <u>EN/HD</u> | <u>Year</u> |
|--------------------|-------------|--|----------------|-------------|
| IEC 61800-7-201 | - | Adjustable speed electrical power drive systems - Part 7-201: Generic interface and use of profiles for power drive systems - Profile type 1 specification | EN 61800-7-201 | - |
| IEC 61800-7-202 | 2015 | Adjustable speed electrical power drive systems - Part 7-202: Generic interface and use of profiles for power drive systems - Profile type 2 specification | EN 61800-7-202 | 2016 |
| IEC 61800-7-203 | - | Adjustable speed electrical power drive systems - Part 7-203: Generic interface and use of profiles for power drive systems - Profile type 3 specification | EN 61800-7-203 | - |
| IEC 61800-7-204 | 2015 | Adjustable speed electrical power drive systems - Part 7-204: Generic interface and use of profiles for power drive systems - Profile type 4 specification | EN 61800-7-204 | 2016 |
| IEC 61800-7-304 | - | Adjustable speed electrical power drive systems - Part 7-304: Generic interface and use of profiles for power drive systems - Mapping of profile type 4 to network technologies | EN 61800-7-304 | - |
| IEC/TR 62390 | 2005 | Common automation device - Profile guideline | - | - |

CONTENTS

| | |
|---|----|
| FOREWORD | 8 |
| INTRODUCTION | 10 |
| 1 Scope | 14 |
| 2 Normative references | 14 |
| 3 Terms, definitions and abbreviated terms | 15 |
| 3.1 System definitions | 15 |
| 3.2 General definitions | 15 |
| 3.3 Specific definitions | 18 |
| 3.3.1 Common definitions | 18 |
| 3.3.2 Definitions for Annex A | 19 |
| 3.3.3 Definitions for Annex B | 19 |
| 3.3.4 Definitions for Annex C | 21 |
| 3.3.5 Definitions for Annex D | 22 |
| 3.4 Abbreviated terms | 23 |
| 3.4.1 Common abbreviations | 23 |
| 3.4.2 Abbreviations for Annex A | 24 |
| 3.4.3 Abbreviations for Annex B | 24 |
| 3.4.4 Abbreviations for Annex C | 24 |
| 3.4.5 Abbreviations for Annex D | 24 |
| 3.5 Conventions | 24 |
| 4 General architecture | 24 |
| 4.1 Generic PDS interface | 24 |
| 4.2 Typical structure of automation systems | 29 |
| 4.3 Structure of the logical PDS | 30 |
| 4.4 Use cases of the PDS | 33 |
| 4.4.1 General | 33 |
| 4.4.2 Use case Engineering | 33 |
| 4.4.3 Use case Operation-control | 34 |
| 5 Functional elements | 35 |
| 5.1 Device identification FE | 35 |
| 5.1.1 General | 35 |
| 5.1.2 Parameters | 35 |
| 5.2 Device control FE | 35 |
| 5.2.1 General | 35 |
| 5.2.2 I/O data | 36 |
| 5.2.3 States | 36 |
| 5.2.4 Parameters | 38 |
| 5.3 Communication FE | 38 |
| 5.3.1 General | 38 |
| 5.3.2 I/O data | 38 |
| 5.3.3 States | 39 |
| 5.3.4 Parameters | 41 |
| 5.4 Basic drive FE | 41 |
| 5.4.1 General | 41 |
| 5.4.2 I/O data | 42 |
| 5.4.3 States | 43 |

| | | |
|---------------------|---|----|
| 5.4.4 | Parameters | 44 |
| 5.5 | Optional application FE | 45 |
| 6 | Application modes | 45 |
| 6.1 | General | 45 |
| 6.2 | Torque control | 46 |
| 6.3 | Velocity control | 47 |
| 6.4 | Position control | 48 |
| 7 | Profile specific extensions | 49 |
| 8 | Structure for annexes | 50 |
| 8.1 | General | 50 |
| 8.2 | Structure of the annexes | 50 |
| Annex A (normative) | Mapping to profile CiA 402 drive and motion control | 54 |
| A.1 | Overview | 54 |
| A.2 | Mapping of general architecture | 54 |
| A.2.1 | Typical structure of automation system | 54 |
| A.2.2 | Structure of the logical PDS | 54 |
| A.2.3 | Use cases of the PDS | 55 |
| A.3 | Functional elements | 55 |
| A.3.1 | Device identification FE | 55 |
| A.3.2 | Device control FE | 56 |
| A.3.3 | Communication FE | 57 |
| A.3.4 | Basic drive FE | 58 |
| A.3.5 | Optional application functions FE | 59 |
| A.4 | Application modes | 60 |
| A.4.1 | General | 60 |
| A.4.2 | Torque control | 60 |
| A.4.3 | Velocity control | 61 |
| A.4.4 | Position control | 64 |
| Annex B (normative) | Mapping to profile CIP Motion™ | 67 |
| B.1 | Overview | 67 |
| B.2 | Mapping of general architecture | 67 |
| B.2.1 | Typical structure of automation systems | 67 |
| B.2.2 | Structure of the logical PDS | 68 |
| B.2.3 | Use cases of the PDS | 69 |
| B.3 | Functional elements | 70 |
| B.3.1 | Device identification FE | 70 |
| B.3.2 | Device control FE | 70 |
| B.3.3 | Communication FE | 72 |
| B.3.4 | Basic drive FE | 74 |
| B.4 | Application modes | 77 |
| B.4.1 | General | 77 |
| B.4.2 | Torque control | 78 |
| B.4.3 | Velocity control | 79 |
| B.4.4 | Position control | 79 |
| B.5 | Profile specific extensions | 79 |
| Annex C (normative) | Mapping to profile PROFIdrive | 80 |
| C.1 | Overview | 80 |
| C.2 | Mapping of general architecture | 80 |

| | | |
|--|---|-----|
| C.2.1 | Typical structure of automation systems | 80 |
| C.2.2 | Structure of the logical PDS..... | 82 |
| C.2.3 | Use cases of the PDS..... | 83 |
| C.3 | Functional elements | 85 |
| C.3.1 | Device identification FE | 85 |
| C.3.2 | Device control FE | 85 |
| C.3.3 | Communication FE | 87 |
| C.3.4 | Basic drive FE | 88 |
| C.3.5 | Optional application functions FE..... | 89 |
| C.4 | Application modes..... | 90 |
| C.4.1 | General | 90 |
| C.4.2 | Torque control | 90 |
| C.4.3 | Velocity control..... | 90 |
| C.4.4 | Position control..... | 92 |
| C.5 | Profile specific extensions..... | 92 |
| Annex D (normative) | Mapping to profile SERCOS | 93 |
| D.1 | Overview..... | 93 |
| D.2 | Mapping of general architecture | 93 |
| D.2.1 | Typical structure of automation systems | 93 |
| D.2.2 | Structure of the logical PDS..... | 95 |
| D.2.3 | Use cases of the PDS..... | 95 |
| D.3 | Functional elements | 95 |
| D.3.1 | Device identification FE | 95 |
| D.3.2 | Device control FE | 96 |
| D.3.3 | Communication FE | 97 |
| D.3.4 | Basic drive FE | 98 |
| D.3.5 | Optional application functions FE..... | 100 |
| D.4 | Application modes..... | 100 |
| D.4.1 | General | 100 |
| D.4.2 | Torque control | 102 |
| D.4.3 | Velocity control..... | 103 |
| D.4.4 | Position control..... | 104 |
| D.5 | Profile specific extensions..... | 105 |
| Bibliography..... | | 107 |
| Figure 1 – Structure of IEC 61800-7..... | | 13 |
| Figure 2 – Definition of power drive system..... | | 25 |
| Figure 3 – Example of system structures for position-control applications | | 26 |
| Figure 4 – Examples of system structures for velocity-control applications..... | | 27 |
| Figure 5 – Examples of system structures for torque-control applications | | 28 |
| Figure 6 – Typical structure of automation systems (adapted from IEC TR 62390) | | 29 |
| Figure 7 – Structure of the PDS with functional elements | | 31 |
| Figure 8 – Functional elements (FE) in the logical PDS..... | | 32 |
| Figure 9 – Use case for the generic PDS interface | | 33 |
| Figure 10 – The generic interface in the use case Operation..... | | 34 |
| Figure 11 – Device control FE state-chart diagram..... | | 37 |
| Figure 12 – Device control FE state transition table | | 37 |

| | |
|--|----|
| Figure 13 – Communication FE state-chart diagram | 40 |
| Figure 14 – Communication FE state transition table | 40 |
| Figure 15 – Optional Communication FE state-chart diagram | 41 |
| Figure 16 – Optional Communication FE state transition table | 41 |
| Figure 17 – Basic drive FE state-chart diagram | 43 |
| Figure 18 – Basic drive FE state transition table | 43 |
| Figure 19 – Optional Basic drive FE state-chart diagram | 44 |
| Figure 20 – Optional Basic drive FE state transition table | 44 |
| Figure 21 – Torque control application mode | 46 |
| Figure 22 – Torque control with velocity feedback application mode | 47 |
| Figure 23 – Velocity preset application mode | 47 |
| Figure 24 – Velocity control application mode | 48 |
| Figure 25 – Velocity control with position feedback application mode | 48 |
| Figure 26 – Position preset application mode | 49 |
| Figure 27 – Position control application mode | 49 |
| Figure A.1 – CiA 402 logical power drive system model | 55 |
| Figure B.1 – CIP Motion I/O Connection data structure | 68 |
| Figure B.2 – Object structure of the logical PDS | 68 |
| Figure B.3 – Motion Device Axis Object state machine | 71 |
| Figure C.1 – Overview of communication devices and services in PROFIdrive | 81 |
| Figure C.2 – Structure of the PROFIdrive device | 82 |
| Figure C.3 – PROFIdrive Axis type Drive Object | 83 |
| Figure C.4 – Functional block diagram of the PROFIdrive Axis type DO | 84 |
| Figure C.5 – Mapping of Communication FE states | 87 |
| Figure D.1 – Topology example | 94 |
| Figure D.2 – State machine of Basic drive FE | 99 |
| Table 1 – Structures within the scope of this part of IEC 61800-7 | 29 |
| Table 2 – Parameters in the Device identification FE | 35 |
| Table 3 – Status values for the Device control FE | 36 |
| Table 4 – Command values for the Device control FE | 36 |
| Table 5 – Parameters in the Device control FE | 38 |
| Table 6 – Status values for the Communication FE (see Figure 13) | 39 |
| Table 7 – Command values for the Communication FE (see Figure 13) | 39 |
| Table 8 – Status values for the optional Communication FE (see Figure 15) | 39 |
| Table 9 – Command values for the optional Communication FE (see Figure 15) | 39 |
| Table 10 – Status values of the Basic drive FE | 42 |
| Table 11 – Optional status values for the Basic drive FE | 42 |
| Table 12 – Command values for Basic drive FE | 42 |
| Table 13 – Optional command values for the Basic drive FE | 43 |
| Table 14 – Possible generic application modes | 45 |
| Table 15 – Set-point values for generic application modes | 46 |
| Table 16 – Mapping of names to profiles | 50 |

| | |
|---|----|
| Table 17 – Structure of annexes | 51 |
| Table 18 – Profile specific terms | 52 |
| Table 19 – Supported application modes | 52 |
| Table 20 – I/O data for profile torque mode | 52 |
| Table 21 – I/O data for profile velocity mode | 53 |
| Table 22 – I/O data for profile position mode | 53 |
| Table A.1 – Profile specific terms | 54 |
| Table A.2 – Drive device identification parameters | 56 |
| Table A.3 – Status values for the Device control FE | 56 |
| Table A.4 – Command values for the Device control FE | 57 |
| Table A.5 – Parameters in the Device control FE | 57 |
| Table A.6 – Status values for the Communication FE | 57 |
| Table A.7 – Command values for the Communication FE | 58 |
| Table A.8 – Status values for the Basic drive FE | 58 |
| Table A.9 – Command values for the Basic drive FE | 58 |
| Table A.10 – Basic drive FE parameters | 59 |
| Table A.11 – Optional application functions FE parameters | 60 |
| Table A.12 – Supported application modes | 60 |
| Table A.13 – I/O data for profile torque mode | 60 |
| Table A.14 – Parameter for profile torque mode | 61 |
| Table A.15 – I/O data for cyclic sync torque mode | 61 |
| Table A.16 – Parameter for cyclic sync torque mode | 61 |
| Table A.17 – I/O data for velocity mode | 62 |
| Table A.18 – Parameter for velocity mode | 62 |
| Table A.19 – I/O data for profile velocity mode | 62 |
| Table A.20 – Parameter for profile velocity mode | 63 |
| Table A.21 – I/O data for cyclic sync velocity mode | 63 |
| Table A.22 – Parameter for cyclic sync velocity mode | 64 |
| Table A.23 – I/O data for profile position mode | 64 |
| Table A.24 – Parameter for profile position mode | 65 |
| Table A.25 – I/O data for interpolated position mode | 65 |
| Table A.26 – Parameter for interpolated position mode | 65 |
| Table A.27 – I/O data for cyclic sync position mode | 66 |
| Table A.28 – Parameter for cyclic sync position mode | 66 |
| Table B.1 – Profile specific terms | 67 |
| Table B.2 – Mapping of parameters for the Device identification FE | 70 |
| Table B.3 – Mapping of status values for the Device control FE | 71 |
| Table B.4 – Mapping of command values for the Device control FE | 71 |
| Table B.5 – Mapping of parameters for the Device control FE | 72 |
| Table B.6 – Mapping of status values for the Communication FE | 73 |
| Table B.7 – Mapping of command values for the Communication FE | 73 |
| Table B.8 – Mapping of status values for the optional Communication FE | 73 |
| Table B.9 – Mapping of command values for the optional Communication FE | 73 |

| | |
|--|-----|
| Table B.10 – Status values for the Basic drive FE | 74 |
| Table B.11 – Command values for the Basic drive FE | 74 |
| Table B.12 – Drive Control Mode values for the Basic drive FE | 75 |
| Table B.13 – Command Data Set values for the Basic drive FE | 76 |
| Table B.14 – Actual Data Set values for the Basic drive FE | 76 |
| Table B.15 – Status Data Set values for the Basic drive FE | 77 |
| Table B.16 – Supported application modes | 78 |
| Table B.17 – Set-point values for the generic application modes | 78 |
| Table B.18 – I/O data for profile torque mode | 79 |
| Table B.19 – I/O data for profile velocity mode | 79 |
| Table B.20 – I/O data for profile position mode | 79 |
| Table C.1 – Profile specific terms | 80 |
| Table C.2 – Parameters for device identification | 85 |
| Table C.3 – Status values for the Device control FE | 86 |
| Table C.4 – Command values for the Device control FE | 86 |
| Table C.5 – Device control parameters | 86 |
| Table C.6 – Status values of the Basic drive FE | 88 |
| Table C.7 – Command values of the Basic drive FE | 88 |
| Table C.8 – Status values for the optional Basic drive FE | 89 |
| Table C.9 – Command values for the optional Basic drive FE | 89 |
| Table C.10 – Device control parameters | 89 |
| Table C.11 – Supported application modes | 90 |
| Table C.12 – I/O data for profile velocity mode | 91 |
| Table C.13 – I/O data for profile velocity control mode with position feedback | 91 |
| Table C.14 – I/O data for profile velocity control mode (process technology) | 92 |
| Table C.15 – I/O data for profile position preset | 92 |
| Table C.16 – I/O data for profile position mode | 92 |
| Table D.1 – Profile specific terms | 93 |
| Table D.2 – Device identification parameters | 96 |
| Table D.3 – Status values for the Device control FE | 96 |
| Table D.4 – Command values for the Device control FE | 97 |
| Table D.5 – Parameters for the Device control FE | 97 |
| Table D.6 – Status values for the Basic drive and Communication FEs | 99 |
| Table D.7 – Command values for the Basic drive and Communication FEs | 100 |
| Table D.8 – IDN for operation modes | 101 |
| Table D.9 – Supported application modes | 102 |
| Table D.10 – Additional application modes | 102 |
| Table D.11 – I/O data for profile torque mode | 102 |
| Table D.12 – Configuration data for torque control | 103 |
| Table D.13 – I/O data for profile velocity mode | 103 |
| Table D.14 – Configuration data for velocity control | 104 |
| Table D.15 – I/O data for profile position mode | 105 |
| Table D.16 – Configuration data for position control | 105 |

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ADJUSTABLE SPEED ELECTRICAL POWER DRIVE SYSTEMS –

Part 7-1: Generic interface and use of profiles for power drive systems – Interface definition

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61800-7-1 has been prepared by subcommittee SC 22G: Adjustable speed electric drive systems incorporating semiconductor power converters, of IEC technical committee TC 22: Power electronic systems and equipment.

This second edition cancels and replaces the first edition published in 2007. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) mapping of drive profile type 1 onto additional network technologies;
- b) minor updates in the subclauses for profile types 1, 2 and 4, in relation with corresponding changes in the dedicated IEC 61800-7-20x parts.

The text of this standard is based on the following documents:

| FDIS | Report on voting |
|--------------|------------------|
| 22G/306/FDIS | 22G/321/RVD |

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61800 series, under the general title *Adjustable speed electrical power drive systems*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

The IEC 61800 series is intended to provide a common set of specifications for adjustable speed electrical power drive systems.

IEC 61800-7 specifies profiles for power drive systems (PDS) and their mapping to existing communication systems by use of a generic interface model.

IEC 61800-7 describes a generic interface between control systems and power drive systems. This interface can be embedded in the control system. The control system itself can also be located in the drive (sometimes known as "smart drive" or "intelligent drive").

A variety of physical interfaces is available (analogue and digital inputs and outputs, serial and parallel interfaces, fieldbuses and networks). Profiles based on specific physical interfaces are already defined for some application areas (e.g. motion control) and some device classes (e.g. standard drives, positioner). The implementations of the associated drivers and application programmers interfaces are proprietary and vary widely.

IEC 61800-7 defines a set of common drive control functions, parameters, and state machines or description of sequences of operation to be mapped to the drive profiles.

IEC 61800-7 provides a way to access functions and data of a drive that is independent of the used drive profile and communication interface. The objective is a common drive model with generic functions and objects suitable to be mapped on different communication interfaces. This makes it possible to provide common implementations of motion control (or velocity control or drive control applications) in controllers without any specific knowledge of the drive implementation.

There are several reasons to define a generic interface:

For a drive device manufacturer

- less effort to support system integrators;
- less effort to describe drive functions because of common terminology;
- the selection of drives does not depend on availability of specific support.

For a control device manufacturer

- no influence of bus technology;
- easy device integration;
- independent of a drive supplier.

For a system integrator

- less integration effort for devices;
- only one understandable way of modeling;
- independent of bus technology.

Much effort is needed to design a motion control application with several different drives and a specific control system. The tasks to implement the system software and to understand the functional description of the individual components may exhaust the project resources. In some cases, the drives do not share the same physical interface. Some control devices just support a single interface which will not be supported by a specific drive. On the other hand, the functions and data structures are often specified with incompatibilities. This requires the system integrator to write special interfaces for the application software and this should not be his responsibility.

Some applications need device exchangeability or integration of new devices in an existing configuration. They are faced with different incompatible solutions. The efforts to adapt a solution to a drive profile and to manufacturer specific extensions may be unacceptable. This will reduce the degree of freedom to select a device best suited for this application to the selection of the unit which will be available for a specific physical interface and supported by the controller.


This part of IEC 61800-7 is divided into a generic part and several annexes as shown in Figure 1. The drive profiles types for CiA® 402¹, CIP MotionTM², PROFIdrive³ and SERCOS®⁴ are mapped to the generic interface in the corresponding annex. The annexes have been submitted by open international network or fieldbus organizations which are responsible for the content of the related annex and use of the related trademarks.

The different profile types 1, 2, 3 and 4 are specified in IEC 61800-7-201, IEC 61800-7-202, IEC 61800-7-203 and IEC 61800-7-204.

-
- 1 CiA® 402 is a registered trade mark of CAN in Automation e.V. (CiA). This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the registered trade mark CiA® 402. Use of the registered trade mark CiA® 402 requires permission of CAN in Automation e.V. (CiA).
 - 2 CIP Motion™ is a trade mark of ODVA, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark CIP Motion™. Use of the trade mark CIP Motion™ requires permission of ODVA, Inc.
 - 3 PROFIdrive is a trade name of PROFIBUS & PROFINET International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFIdrive. Use of the trade name PROFIdrive requires permission of PROFIBUS & PROFINET International.
 - 4 SERCOS® is a registered trade mark of SERCOS International e.V. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the registered trade mark SERCOS®. Use of the registered trade mark SERCOS® requires permission of the trade mark holder.

IEC 61800-7-301, IEC 61800-7-302, IEC 61800-7-303 and IEC 61800-7-304 specify how the profile types 1, 2, 3 and 4 are mapped to different network technologies (such as CANopen®⁵, CC-Link IE® Field Network⁶, EPA™⁷, EtherCAT®⁸, Ethernet Powerlink™⁹, DeviceNet™¹⁰, ControlNet™¹¹, EtherNet/IP™¹², PROFIBUS¹³, PROFINET¹⁴ and SERCOS®).

-
- 5 CANopen® is a registered trade mark of CAN in Automation e.V. (CiA). This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the registered trade mark CANopen®. Use of the registered trade mark CANopen® requires permission of CAN in Automation e.V. (CiA). CANopen® is an acronym for Controller Area Network open and is used to refer to EN 50325-4.
 - 6 CC-Link IE® Field Network is a registered trade mark of Mitsubishi Electric Corporation. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the registered trade mark CC-Link IE® Field Network. Use of the registered trade mark CC-Link IE® Field Network requires permission of Mitsubishi Electric Corporation.
 - 7 EPA™ is a trade mark of SUPCON Group Co. Ltd. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark EPA™. Use of the trade mark EPA™ requires permission of the trade mark holder.
 - 8 EtherCAT® is a registered trade mark of Beckhoff, Verl. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the registered trade mark EtherCAT®. Use of the registered trade mark EtherCAT® requires permission of the trade mark holder.
 - 9 Ethernet Powerlink™ is a trade mark of Bernecker & Rainer Industrielektronik Ges.m.b.H., control of trade mark use is given to the non-profit organization EPSG. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark Ethernet Powerlink™. Use of the trade mark Ethernet Powerlink™ requires permission of the trade mark holder.
 - 10 DeviceNet™ is a trade mark of ODVA, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark DeviceNet™. Use of the trade mark DeviceNet™ requires permission of ODVA, Inc.
 - 11 ControlNet™ is a trade mark of ODVA, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark ControlNet™. Use of the trade mark ControlNet™ requires permission of ODVA, Inc.
 - 12 EtherNet/IP™ is a trade mark of ODVA, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark EtherNet/IP™. Use of the trade mark EtherNet/IP™ requires permission of ODVA, Inc.
 - 13 PROFIBUS is a trade name of PROFIBUS & PROFINET International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFIBUS. Use of the trade name PROFIBUS requires permission of PROFIBUS & PROFINET International.
 - 14 PROFINET is a trade name of PROFIBUS & PROFINET International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFINET. Use of the trade name PROFINET requires permission of PROFIBUS & PROFINET International.

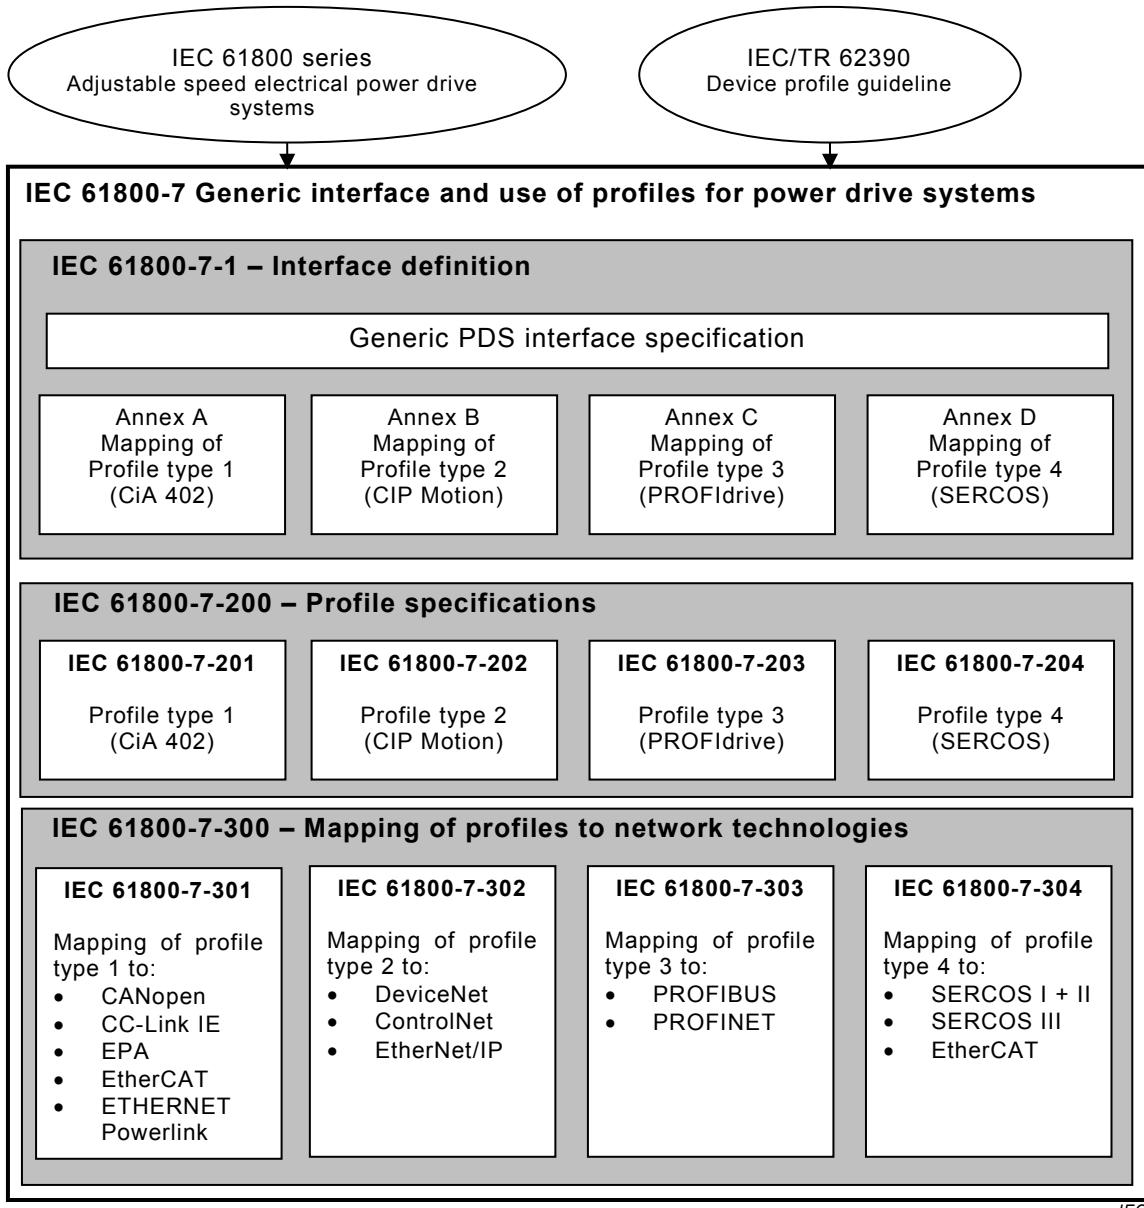

IEC

Figure 1 – Structure of IEC 61800-7

ADJUSTABLE SPEED ELECTRICAL POWER DRIVE SYSTEMS –

Part 7-1: Generic interface and use of profiles for power drive systems – Interface definition

1 Scope

This part of IEC 61800 specifies a generic interface between power drive system(s) (PDS) and the application control program in a controller. The generic PDS interface is not specific to any particular communication network technology. Annexes of this part of IEC 61800 specify the mapping of the different drive profiles types onto the generic PDS interface.

The functions specified in this part of IEC 61800 are not intended to ensure functional safety. This requires additional measures according to the relevant standards, agreements and laws.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61158-5-2, *Industrial communication networks – Fieldbus specifications – Part 5-2: Application layer service definition – Type 2 elements*

IEC 61158-5-3, *Industrial communication networks – Fieldbus specifications – Part 5-3: Application layer service definition – Type 3 elements*

IEC 61158-5-10, *Industrial communication networks – Fieldbus specifications – Part 5-10: Application layer service definition – Type 10 elements*

IEC 61158-6-2, *Industrial communication networks – Fieldbus specifications – Part 6-2: Application layer protocol specification – Type 2 elements*

IEC 61158-6-3, *Industrial communication networks – Fieldbus specifications – Part 6-3: Application layer protocol specification – Type 3 elements*

IEC 61158-6-10, *Industrial communication networks – Fieldbus specifications – Part 6-10: Application layer protocol specification – Type 10 elements*

IEC 61800-7 (all parts), *Adjustable speed electrical power drive systems – Generic interface and use of profiles for power drive systems*

IEC 61800-7-201, *Adjustable speed electrical power drive systems – Part 7-201: Generic interface and use of profiles for power drive systems – Profile type 1 specification*

IEC 61800-7-202:2015, *Adjustable speed electrical power drive systems – Part 7-202: Generic interface and use of profiles for power drive systems – Profile type 2 specification*

IEC 61800-7-203, *Adjustable speed electrical power drive systems – Part 7-203: Generic interface and use of profiles for power drive systems – Profile type 3 specification*

IEC 61800-7-204:2015, *Adjustable speed electrical power drive systems – Part 7-204: Generic interface and use of profiles for power drive systems – Profile type 4 specification*

IEC 61800-7-304, *Adjustable speed electrical power drive systems – Part 7-304: Generic interface and use of profiles for power drive systems – Mapping of profile type 4 to network technologies*

IEC TR 62390:2005, *Common automation device – Profile guideline*

EN 50325-4, *Industrial communications subsystem based on ISO 11898 (CAN) for controller-device interfaces – Part 4: CANopen*