

© Copyright SEK. Reproduction in any form without permission is prohibited.

Varvtalsstyrda elektriska drivsystem – Del 7-304: Generellt gränssnitt och användning av profiler för drivsystem – Mappning av profil av typ 4 på nät

*Adjustable speed electrical power drive systems –
Part 7-304: Generic interface and use of profiles for power drive systems –
Mapping of profile type 4 to network technologies*

Som svensk standard gäller europastandarden EN 61800-7-304:2016. Den svenska standarden innehåller den officiella engelska språkversionen av EN 61800-7-304:2016.

Nationellt förord

Europastandarden EN 61800-7-304:2016

består av:

- **europastandardens ikraftsättningsdokument**, utarbetat inom CENELEC
- **IEC 61800-7-304, Second edition, 2015 - Adjustable speed electrical power drive systems - Part 7-304: Generic interface and use of profiles for power drive systems - Mapping of profile type 4 to network technologies**

utarbetad inom International Electrotechnical Commission, IEC.

Tidigare fastställd svensk standard SS-EN 61800-7-304, utgåva 1, 2008, gäller ej fr o m 2018-12-25.

Standarder underlättar utvecklingen och höjer elsäkerheten

Det finns många fördelar med att ha gemensamma tekniska regler för bl a mätning, säkerhet och provning och för utförande, skötsel och dokumentation av elprodukter och elanläggningar.

Genom att utforma sådana standarder blir säkerhetsfordringar tydliga och utvecklingskostnaderna rimliga samtidigt som marknadens acceptans för produkten eller tjänsten ökar.

Många standarder inom elområdet beskriver tekniska lösningar och metoder som åstadkommer den elsäkerhet som föreskrivs av svenska myndigheter och av EU.

SEK är Sveriges röst i standardiseringsarbetet inom elområdet

SEK Svensk Elstandard svarar för standardiseringen inom elområdet i Sverige och samordnar svensk medverkan i internationell och europeisk standardisering. SEK är en ideell organisation med frivilligt deltagande från svenska myndigheter, företag och organisationer som vill medverka till och påverka utformningen av tekniska regler inom elektrotekniken.

SEK samordnar svenska intressenters medverkan i SEKs tekniska kommittéer och stödjer svenska experters medverkan i internationella och europeiska projekt.

Stora delar av arbetet sker internationellt

Utformningen av standarder sker i allt väsentligt i internationellt och europeiskt samarbete. SEK är svensk nationalkommitté av International Electrotechnical Commission (IEC) och Comité Européen de Normalisation Electrotechnique (CENELEC).

Standardiseringsarbetet inom SEK är organiserat i referensgrupper bestående av ett antal tekniska kommittéer som speglar hur arbetet inom IEC och CENELEC är organiserat.

Arbetet i de tekniska kommittéerna är öppet för alla svenska organisationer, företag, institutioner, myndigheter och statliga verk. Den årliga avgiften för deltagandet och intäkter från försäljning finansierar SEKs standardiseringsverksamhet och medlemsavgift till IEC och CENELEC.

Var med och påverka!

Den som deltar i SEKs tekniska kommittéarbete har möjlighet att påverka framtida standarder och får tidig tillgång till information och dokumentation om utvecklingen inom sitt teknikområde. Arbetet och kontakterna med kollegor, kunder och konkurrenter kan gynnsamt påverka enskilda företags affärsutveckling och bidrar till deltagarnas egen kompetensutveckling.

Du som vill dra nytta av dessa möjligheter är välkommen att kontakta SEKs kansli för mer information.

SEK Svensk Elstandard

Box 1284
164 29 Kista
Tel 08-444 14 00
www.elstandard.se

English Version

**Adjustable speed electrical power drive systems -
Part 7-304: Generic interface and use of profiles for power drive
systems - Mapping of profile type 4 to network technologies
(IEC 61800-7-304:2015)**

Entraînements électriques de puissance à vitesse variable -
Partie 7-304: Interface générique et utilisation de profils
pour les entraînements électriques de puissance - Mise en
correspondance du profil de type 4 avec les technologies
de réseaux
(IEC 61800-7-304:2015)

Elektrische Leistungsantriebssysteme mit einstellbarer
Drehzahl - Teil 7-304: Generisches Interface und Nutzung
von Profilen für Leistungsantriebssysteme (PDS) -
Abbildung von Profil-Typ 4 auf Netzwerktechnologien
(IEC 61800-7-304:2015)

This European Standard was approved by CENELEC on 2015-12-25. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

European foreword

The text of document 22G/314/FDIS, future edition 2 of IEC 61800-7-304, prepared by SC 22G "Adjustable speed electric drive systems incorporating semiconductor power converters" of IEC/TC 22 "Power electronic systems and equipment" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 61800-7-304:2016.

The following dates are fixed:

- latest date by which the document has to be (dop) 2016-09-25
implemented at national level by
publication of an identical national
standard or by endorsement
- latest date by which the national (dow) 2018-12-25
standards conflicting with the
document have to be withdrawn

This document supersedes EN 61800-7-304:2008.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 61800-7-304:2015 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 61158:2014 Series	NOTE	Harmonized as EN 61158:2014 Series.
IEC 61499-1:2005	NOTE	Harmonized as EN 61499-1:2005 ¹⁾ (not modified).
IEC 61800 Series	NOTE	Harmonized as EN 61800 Series.
IEC 61800-7 Series	NOTE	Harmonized as EN 61800-7 Series.
IEC 61800-7-1	NOTE	Harmonized as EN 61800-7-1.
IEC 61800-7-201	NOTE	Harmonized as EN 61800-7-201.
IEC 61800-7-202	NOTE	Harmonized as EN 61800-7-202.
IEC 61800-7-203	NOTE	Harmonized as EN 61800-7-203.
IEC 61800-7-301	NOTE	Harmonized as EN 61800-7-301.
IEC 61800-7-302	NOTE	Harmonized as EN 61800-7-302.
IEC 61800-7-303	NOTE	Harmonized as EN 61800-7-303.

¹⁾ Superseded by EN 61499-1:2013 (IEC 61499-1:2012).

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 When an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61158-2	-	Industrial communication networks - Fieldbus specifications - Part 2: Physical layer specification and service definition	EN 61158-2	-
IEC 61158-4-16	-	Industrial communication networks - Fieldbus specifications - Part 4-16: Data-link layer protocol specification - Type 16 elements	EN 61158-4-16	-
IEC 61158-5-16	-	Industrial communication networks - Fieldbus specifications - Part 5-16: Application layer service definition - Type 16 elements	EN 61158-5-16	-
IEC 61491	2002 ²⁾	Electrical equipment of industrial machines - Serial data link for real-time communication between controls and drives	-	-
IEC 61784-1	-	Industrial communication networks - Profiles - Part 1: Fieldbus profiles	EN 61784-1	-
IEC 61784-2	-	Industrial communication networks - Profiles - Part 2: Additional fieldbus profiles for real-time networks based on ISO/IEC 8802-3	EN 61784-2	-
IEC 61800-7-204	2015	Adjustable speed electrical power drive systems - Part 7-204: Generic interface and use of profiles for power drive systems - Profile type 4 specification	EN 61800-7-204	2016
ISO/IEC/IEEE 8802-3	2014	Standard for Ethernet	-	-

²⁾ Withdrawn publication.

CONTENTS

FOREWORD.....	6
INTRODUCTION.....	8
1 Scope.....	12
2 Normative references	12
3 Terms, definitions and abbreviated terms	12
3.1 Terms and definitions.....	12
3.2 Abbreviated terms.....	18
4 General	18
5 Mapping to CP16/1 (SERCOS I) and CP16/2 (SERCOS II)	19
5.1 Reference to communication standards.....	19
5.2 Overview.....	19
5.3 Physical layer and topology	21
5.4 Synchronization mechanism.....	22
5.4.1 General	22
5.4.2 Handling of command and feedback values	23
5.4.3 Position loop with fine interpolator	24
5.5 Telegram contents	25
5.5.1 General	25
5.5.2 Data block	26
5.5.3 Communication function group telegrams	26
5.5.4 Standard telegrams	27
5.5.5 Application telegrams	29
5.6 Non-cyclic data transfer	30
5.7 Real-time bits.....	30
5.7.1 Functions of real time bits.....	30
5.7.2 Allocation of real-time bits	32
5.7.3 Possible cases	32
5.8 Signal control word and signal status word	35
5.9 Data container	36
5.10 Drive shutdown functions	38
5.11 Communication classes	39
5.11.1 General	39
5.11.2 Communication class A	40
5.11.3 Communication class B (Extended functions)	42
5.11.4 Communication class C (Additional functions).....	43
5.11.5 Communication cycle time granularity.....	44
6 Mapping to CP16/3 (SERCOS III)	44
6.1 Reference to communication standards.....	44
6.2 Overview.....	45
6.3 Physical layer and topology	46
6.4 Synchronization mechanism and telegram content	47
6.5 Non-cyclic data transfer	47
6.6 Communication cycles	48
6.7 Drive classes	48
6.7.1 General	48
6.7.2 Torque axis	49

6.7.3	Velocity axis	50
6.7.4	Velocity axis with position feedback	51
6.7.5	Position axis	53
6.7.6	Positioning axis	55
7	Mapping to EtherCAT	57
7.1	Reference to communication standards	57
7.2	Overview	57
7.3	SoE synchronization	58
7.3.1	General	58
7.3.2	CP16 Phase 0-2	59
7.3.3	CP16 Phase 3-4	59
7.4	SoE Application Layer Management	59
7.4.1	EtherCAT State Machine and IEC 61784 CPF 16 State Machine	59
7.4.2	Multiple drives	60
7.4.3	IDN usage	60
7.5	SoE Process Data Mapping	61
7.6	SoE Service Channel Services	64
7.6.1	Overview	64
7.6.2	SSC Read	64
7.6.3	SSC Write	68
7.6.4	SSC Procedure Commands	72
7.6.5	SSC Slave Info	75
7.7	SoE Coding general	76
7.8	SoE Protocol Data Unit Coding	78
7.8.1	SSC Read	78
7.8.2	SSC Write	82
7.8.3	Notify SSC Command Execution request	87
7.8.4	SSC Slave Info	88
	Bibliography	90
	Figure 1 – Structure of IEC 61800-7	11
	Figure 2 – Topology	22
	Figure 3 – Validity of command values and feedback acquisition time in the PDSs	23
	Figure 4 – Synchronization of cycle times	24
	Figure 5 – Synchronization of the control loops and the fine interpolator	25
	Figure 6 – AT configuration (example)	30
	Figure 7 – Function of the real-time bits	32
	Figure 8 – Allocation of IDN $\neq 0$ to the real-time bits	33
	Figure 9 – Allocation of IDN = 0 to the real-time bits	34
	Figure 10 – Allocation of IDN $\neq 0$ to the real-time bits	35
	Figure 11 – Configuration example of signal status word	36
	Figure 12 – Data container configuration without acknowledge (slave)	37
	Figure 13 – Data container configuration with acknowledge (slave)	38
	Figure 14 – Structure of communication classes	39
	Figure 15 – Topology	46
	Figure 16 – Telegram sequence	47
	Figure 17 – General communication cycle	48

Figure 18 – ESM and IEC 61158-4-16 State Machine	59
Figure 19 – Successful SSC Read sequence	65
Figure 20 – Unsuccessful SSC Read sequence	65
Figure 21 – Successful SSC Fragmented Read sequence.....	66
Figure 22 – Successful SSC Write sequence	69
Figure 23 – Unsuccessful SSC Write sequence.....	69
Figure 24 – Successful SSC Fragmented Write sequence.....	70
Figure 25 – Successful SSC Procedure Command sequence.....	73
Figure 26 – Aborted SSC Procedure Command sequence	74
Figure 27 – Slave Info sequence.....	75
Table 1 – CP16/1 and CP16/2 feature summary.....	19
Table 2 – Number of PDSs per network (examples)	20
Table 3 – Communication Profile Interoperability within a network	21
Table 4 – Typical operation data for cyclic transmission.....	25
Table 5 – Typical data for non-cyclic transmission	26
Table 6 – IDN for choice and parameterisation of telegrams	27
Table 7 – Structure of standard telegram-0	27
Table 8 – Structure of standard telegram-1	27
Table 9 – Structure of standard telegram-2	27
Table 10 – Structure of standard telegram-3	28
Table 11 – Structure of standard telegram-4	28
Table 12 – Structure of standard telegram-5	29
Table 13 – Structure of standard telegram-6	29
Table 14 – IDN for configuration of MDT	29
Table 15 – IDN for configuration of AT	30
Table 16 – IDN for real-time bits	31
Table 17 – Real-time bits assignment IDNs.....	31
Table 18 – IDN for configuring control and status words	35
Table 19 – Data containers IDN	36
Table 20 – Ring configuration – Timing	40
Table 21 – Ring configuration – Telegram configuration.....	40
Table 22 – Ring configuration – Phase run-up.....	41
Table 23 – Service channel protocol	41
Table 24 – Information & diagnostics	41
Table 25 – Communication class A settings	42
Table 26 – Ring configuration – Telegram configuration.....	42
Table 27 – Information & diagnostics	43
Table 28 – Real-time control bits	43
Table 29 – Real-time status bits.....	43
Table 30 – Communication class B settings	43
Table 31 – CP16/3 features summary	45
Table 32 – Mandatory bit combinations of Drive control	49

Table 33 – Mandatory bit combinations of Drive status	49
Table 34 – Supported operation mode	50
Table 35 – Supported torque/force scaling	50
Table 36 – Supported operation mode	51
Table 37 – Supported velocity scaling	51
Table 38 – Supported operation mode	52
Table 39 – Supported position polarity	52
Table 40 – Supported velocity scaling	53
Table 41 – Supported position scaling	53
Table 42 – Supported operation mode	54
Table 43 – Supported position polarity	54
Table 44 – Supported velocity scaling	54
Table 45 – Supported position scaling	54
Table 46 – Supported torque/force scaling	55
Table 47 – Supported operation mode	56
Table 48 – Supported position polarity	56
Table 49 – Supported velocity scaling	56
Table 50 – Supported position scaling	56
Table 51 – Supported torque/force scaling	57
Table 52 – Supported acceleration scaling	57
Table 53 – EtherCAT feature summary	58
Table 54 – Number of PDSs per network (examples)	58
Table 55 – Obsolete IDNs	60
Table 56 – Changed IDNs	61
Table 57 – Status word of drive	62
Table 58 – Control word for drive	63
Table 59 – Mapping of SSC services to EtherCAT services	64
Table 60 – SSC Read service	66
Table 61 – Read SSC Fragment service	68
Table 62 – SSC Write service	70
Table 63 – Write SSC Fragment service	72
Table 64 – Notify SSC Command Execution service	74
Table 65 – SSC Slave Info service	76
Table 66 – SoE Mailbox protocol	77
Table 67 – SSC Read request	79
Table 68 – SSC Read response	80
Table 69 – Read SSC Fragment request	81
Table 70 – SSC Write request	83
Table 71 – SSC Write response	85
Table 72 – Write SSC Fragment request	86
Table 73 – Notify SSC Command Execution request	88
Table 74 – Slave Info request	89

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ADJUSTABLE SPEED ELECTRICAL POWER DRIVE SYSTEMS –**Part 7-304: Generic interface and use of profiles for power drive systems – Mapping of profile type 4 to network technologies****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61800-7-304 has been prepared by subcommittee SC 22G: Adjustable speed electric drive systems incorporating semiconductor power converters, of IEC technical committee TC 22: Power electronic systems and equipment.

This second edition cancels and replaces the first edition published in 2007. This edition constitutes a technical revision.

This edition includes the following significant technical change with respect to the previous edition: Update of mapping specification.

The text of this standard is based on the following documents:

FDIS	Report on voting
22G/314/FDIS	22G/329/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61800 series, under the general title *Adjustable speed electrical power drive systems*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

The IEC 61800 series is intended to provide a common set of specifications for adjustable speed electrical power drive systems.

IEC 61800-7 specifies profiles for power drive systems (PDS) and their mapping to existing communication systems by use of a generic interface model.

IEC 61800-7 describes a generic interface between control systems and power drive systems. This interface can be embedded in the control system. The control system itself can also be located in the drive (sometimes known as "smart drive" or "intelligent drive").

A variety of physical interfaces is available (analogue and digital inputs and outputs, serial and parallel interfaces, fieldbuses and networks). Profiles based on specific physical interfaces are already defined for some application areas (e.g. motion control) and some device classes (e.g. standard drives, positioner). The implementations of the associated drivers and application programmers interfaces are proprietary and vary widely.

IEC 61800-7 defines a set of common drive control functions, parameters, and state machines or description of sequences of operation to be mapped to the drive profiles.

IEC 61800-7 provides a way to access functions and data of a drive that is independent of the used drive profile and communication interface. The objective is a common drive model with generic functions and objects suitable to be mapped on different communication interfaces. This makes it possible to provide common implementations of motion control (or velocity control or drive control applications) in controllers without any specific knowledge of the drive implementation.

There are several reasons to define a generic interface:

For a drive device manufacturer

- less effort to support system integrators;
- less effort to describe drive functions because of common terminology;
- the selection of drives does not depend on availability of specific support;

For a control device manufacturer

- no influence of bus technology;
- easy device integration;
- independent of a drive supplier;

For a system integrator

- less integration effort for devices;
- only one understandable way of modeling;
- independent of bus technology.

Much effort is needed to design a motion control application with several different drives and a specific control system. The tasks to implement the system software and to understand the functional description of the individual components may exhaust the project resources. In some cases, the drives do not share the same physical interface. Some control devices just support a single interface which will not be supported by a specific drive. On the other hand, the functions and data structures are often specified with incompatibilities. This requires the system integrator to write special interfaces for the application software and this should not be his responsibility.

Some applications need device exchangeability or integration of new devices in an existing configuration. They are faced with different incompatible solutions. The efforts to adapt a solution to a drive profile and to manufacturer specific extensions may be unacceptable. This will reduce the degree of freedom to select a device best suited for this application to the selection of the unit which will be available for a specific physical interface and supported by the controller.

IEC 61800-7-1 is divided into a generic part and several annexes as shown in Figure 1. The drive profile types for CiA® 402¹, CIP Motion™², PROFIdrive³ and SERCOS®⁴ are mapped to the generic interface in the corresponding annex. The annexes have been submitted by open international network or fieldbus organizations which are responsible for the content of the related annex and use of the related trade marks.

The different profile types 1, 2, 3 and 4 are specified in IEC 61800-7-201, IEC 61800-7-202, IEC 61800-7-203 and IEC 61800-7-204.

This part of IEC 61800-7 specifies how the profile type 4 (SERCOS®) is mapped to the network technologies SERCOS® and EtherCAT®⁵.

¹ CiA® 402 is a registered trade mark of CAN in Automation e.V. (CiA). This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the registered trade mark CiA® 402. Use of the registered trade mark CiA® 402 requires permission of CAN in Automation e.V. (CiA).

² CIP Motion™ is a trade mark of ODVA, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark CIP Motion™. Use of the trade mark CIP Motion™ requires permission of ODVA, Inc.

³ PROFIdrive is a trade name of PROFIBUS & PROFINET International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFIdrive. Use of the trade name PROFIdrive requires permission of PROFIBUS & PROFINET International.

⁴ SERCOS® is a registered trade mark of SERCOS International e.V. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the registered trade mark SERCOS®. Use of the registered trade mark SERCOS® requires permission of the trade mark holder.

⁵ EtherCAT® is a registered trade mark of Beckhoff, Verl. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the registered trade mark EtherCAT®. Use of the registered trade mark EtherCAT® requires permission of the trade mark holder.

IEC 61800-7-301, IEC 61800-7-302 and IEC 61800-7-303 specify how the profile types 1, 2 and 3 are mapped to different network technologies (such as CANopen⁶, CC-Link IE⁷ Field Network, EPA⁸, EtherCAT⁹, Ethernet Powerlink⁹, DeviceNet¹⁰, ControlNet¹¹, EtherNet/IP¹², PROFIBUS¹³ and PROFINET¹⁴).

-
- ⁶ CANopen[®] is a registered trade mark of CAN in Automation e.V. (CiA). This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the registered trade mark CANopen[®]. Use of the registered trade mark CANopen[®] requires permission of CAN in Automation e.V. (CiA). CANopen[®] is an acronym for Controller Area Network *open* and is used to refer to EN 50325-4.
- ⁷ CC-Link IE[®] Field Network is a registered trade mark of Mitsubishi Electric Corporation. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the registered trade mark CC-Link IE[®] Field Network. Use of the registered trade mark CC-Link IE[®] Field Network requires permission of Mitsubishi Electric Corporation.
- ⁸ EPA[™] is a trade mark of SUPCON Group Co. Ltd. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark EPA[™]. Use of the trade mark EPA[™] requires permission of the trade mark holder.
- ⁹ Ethernet Powerlink[™] is a trade mark of B&R, control of trade mark use is given to the non profit organization EPSG. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark Ethernet Powerlink[™]. Use of the trade mark Ethernet Powerlink[™] requires permission of the trade mark holder.
- ¹⁰ DeviceNet[™] is a trade mark of ODVA, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark DeviceNet[™]. Use of the trade mark DeviceNet[™] requires permission of ODVA, Inc.
- ¹¹ ControlNet[™] is a trade mark of ODVA, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark ControlNet[™]. Use of the trade mark ControlNet[™] requires permission of ODVA, Inc.
- ¹² EtherNet/IP[™] is a trade mark of ODVA, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade mark holder or any of its products. Compliance to this profile does not require use of the trade mark EtherNet/IP[™]. Use of the trade mark EtherNet/IP[™] requires permission of ODVA, Inc.
- ¹³ PROFIBUS is a trade name of PROFIBUS & PROFINET International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFIBUS. Use of the trade name PROFIBUS requires permission of PROFIBUS & PROFINET International.
- ¹⁴ PROFINET is a trade name of PROFIBUS & PROFINET International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFINET. Use of the trade name PROFINET requires permission of PROFIBUS & PROFINET International.

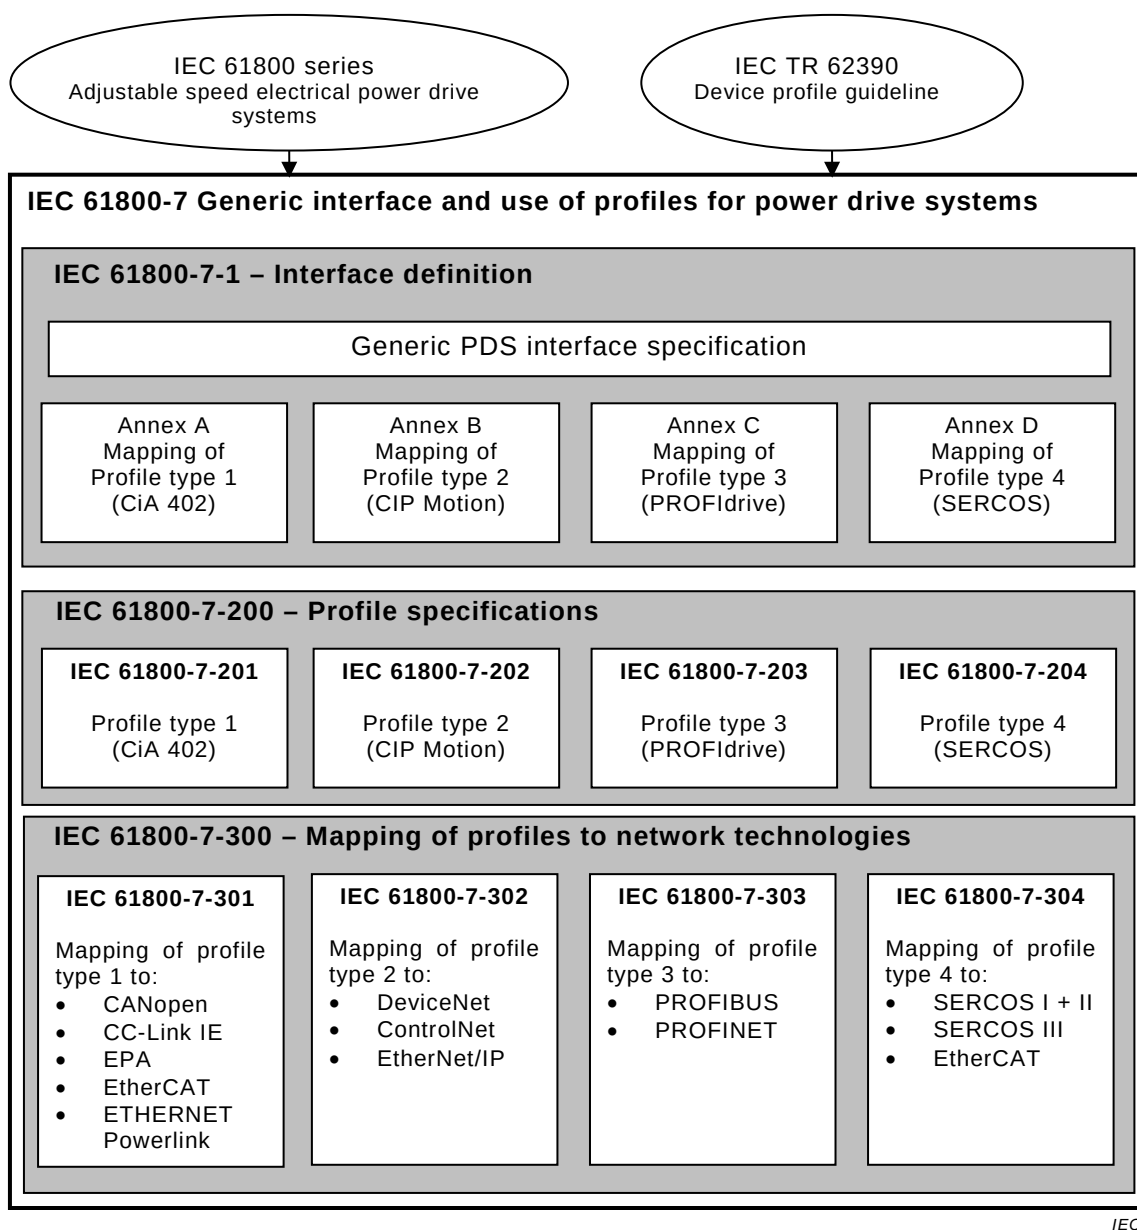


Figure 1 – Structure of IEC 61800-7

ADJUSTABLE SPEED ELECTRICAL POWER DRIVE SYSTEMS –

Part 7-304: Generic interface and use of profiles for power drive systems – Mapping of profile type 4 to network technologies

1 Scope

This part of IEC 61800 specifies the mapping of the profile type 4 (SERCOS) specified in IEC 61800-7-204 onto different network technologies.

- SERCOS I / II, see Clause 5,
- SERCOS III, see Clause 6,
- EtherCAT, see Clause 7.

The functions specified in this part of IEC 61800-7 are not intended to ensure functional safety. This requires additional measures according to the relevant standards, agreements and laws.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61158-2, *Industrial communication networks – Fieldbus specifications – Part 2: Physical layer specification and service definition*

IEC 61158-4-16, *Industrial communication networks – Fieldbus specifications – Part 4-16: Data-link layer protocol specification – Type 16 elements*

IEC 61158-5-16, *Industrial communication networks – Fieldbus specifications – Part 5-16: Application layer service definition – Type 16 elements*

IEC 61491:2002, *Electrical equipment of industrial machines – Serial data link for real-time communication between controls and drives*

IEC 61784-1, *Industrial communication networks – Profiles – Part 1: Fieldbus profiles*

IEC 61784-2, *Industrial communication networks – Profiles – Part 2: Additional fieldbus profiles for real-time networks based on ISO/IEC 8802-3*

IEC 61800-7-204:2015, *Adjustable speed electrical power drive systems – Part 7-204: Generic interface and use of profiles for power drive systems – Profile type 4 specification*

ISO/IEC/IEEE 8802-3:2014, *Standard for Ethernet*