

© Copyright SEK. Reproduction in any form without permission is prohibited.

## Varvtalsstyrda elektriska drivsystem – Del 7-304: Generellt gränssnitt och användning av profiler för drivsystem – Mappning av profil av typ 4 på nät

*Adjustable speed electrical power drive systems –  
Part 7-304: Generic interface and use of profiles for power drive systems –  
Mapping of profile type 4 to network technologies*

Som svensk standard gäller europastandarden EN 61800-7-304:2008. Den svenska standarden innehåller den officiella engelska språkversionen av EN 61800-7-304:2008.

### Nationellt förord

Europastandarden EN 61800-7-304:2008

består av:

- **europastandardens ikraftsättningsdokument**, utarbetat inom CENELEC
- **IEC 61800-7-304, First edition, 2007 - Adjustable speed electrical power drive systems - Part 7-304: Generic interface and use of profiles for power drive systems - Mapping of profile type 4 to network technologies**

utarbetad inom International Electrotechnical Commission, IEC.

Standarden ersätter delvis SS-EN 61491, utgåva 1, 1998, fr om 2011-02-01.

---

ICS 29.200; 35.100.05

## *Standarder underlättar utvecklingen och höjer elsäkerheten*

Det finns många fördelar med att ha gemensamma tekniska regler för bl a säkerhet, prestanda, dokumentation, utförande och skötsel av elprodukter, elanläggningar och metoder. Genom att utforma sådana standarder blir säkerhetskraven tydliga och utvecklingskostnaderna rimliga samtidigt som marknadens acceptans för produkten eller tjänsten ökar.

Många standarder inom elområdet beskriver tekniska lösningar och metoder som åstadkommer den elsäkerhet som föreskrivs av svenska myndigheter och av EU.

## *SEK är Sveriges röst i standardiseringssarbetet inom elområdet*

SEK Svensk Elstandard svarar för standardiseringen inom elområdet i Sverige och samordnar svensk medverkan i internationell och europeisk standardisering. SEK är en ideell organisation med frivilligt deltagande från svenska myndigheter, företag och organisationer som vill medverka till och påverka utformningen av tekniska regler inom elektrotekniken.

SEK samordnar svenska intressenters medverkan i SEKs tekniska kommittéer och stödjer svenska experters medverkan i internationella och europeiska projekt.

## *Stora delar av arbetet sker internationellt*

Utdriften av standarder sker i allt väsentligt i internationellt och europeiskt samarbete. SEK är svensk nationalkommitté av International Electrotechnical Commission (IEC) och Comité Européen de Normalisation Electrotechnique (CENELEC).

Standardiseringssarbetet inom SEK är organiserat i referensgrupper bestående av ett antal tekniska kommittéer som speglar hur arbetet inom IEC och CENELEC är organiserat.

Arbetet i de tekniska kommittéerna är öppet för alla svenska organisationer, företag, institutioner, myndigheter och statliga verk. Den årliga avgiften för deltagandet och intäkter från försäljning finansierar SEKs standardiseringssverksamhet och medlemsavgift till IEC och CENELEC.

## *Var med och påverka!*

Den som deltar i SEKs tekniska kommittéarbete har möjlighet att påverka framtidens standarder och får tidig tillgång till information och dokumentation om utvecklingen inom sitt teknikområde. Arbetet och kontakterna med kollegor, kunder och konkurrenter kan gynnsamt påverka enskilda företags affärsutveckling och bidrar till deltagarnas egen kompetensutveckling.

Du som vill dra nytta av dessa möjligheter är välkommen att kontakta SEKs kansli för mer information.

## **SEK Svensk Elstandard**

Box 1284  
164 29 Kista  
Tel 08-444 14 00  
[www.elstandard.se](http://www.elstandard.se)

English version

**Adjustable speed electrical power drive systems -  
Part 7-304: Generic interface and use of profiles for power drive systems -  
Mapping of profile type 4 to network technologies  
(IEC 61800-7-304:2007)**

Entraînements électriques de puissance  
à vitesse variable -  
Partie 7-304: Interface et utilisation  
génériques de profils  
pour les entraînements électriques  
de puissance -  
Mapping des profils de type 4  
pour technologies réseaux  
(CEI 61800-7-304:2007)

Elektrische Leistungsantriebssysteme  
mit einstellbarer Drehzahl -  
Teil 7-304: Generisches Interface  
und Nutzung von Profilen  
für Leistungsantriebssysteme (PDS) -  
Abbildung von Profil-Typ 4  
auf Netzwerktechnologien  
(IEC 61800-7-304:2007)

This European Standard was approved by CENELEC on 2008-02-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

**CENELEC**

European Committee for Electrotechnical Standardization  
Comité Européen de Normalisation Electrotechnique  
Europäisches Komitee für Elektrotechnische Normung

**Central Secretariat: rue de Stassart 35, B - 1050 Brussels**

## Foreword

The text of document 22G/185/FDIS, future edition 1 of IEC 61800-7-304, prepared by SC 22G, Adjustable speed electric drive systems incorporating semiconductor power converters, of IEC TC 22, Power electronic systems and equipment, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as EN 61800-7-304 on 2008-02-01.

This European Standard, together with its companion parts for Profile type 4 (SERCOS), partially replaces EN 61491:1998 which is at present being revised (to be issued as a Technical Report).

The following dates were fixed:

- latest date by which the EN has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2008-11-01
- latest date by which the national standards conflicting with the EN have to be withdrawn (dow) 2011-02-01

Annex ZA has been added by CENELEC.

---

## Endorsement notice

The text of the International Standard IEC 61800-7-304:2007 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

|                 |  |
|-----------------|--|
| IEC 61158       | NOTE Harmonized in EN 61158 series (not modified).     |
| IEC 61499-1     | NOTE Harmonized as EN 61499-1:2005 (not modified).     |
| IEC 61800       | NOTE Harmonized in EN 61800 series (not modified).     |
| IEC 61800-7-1   | NOTE Harmonized as EN 61800-7-1:2008 (not modified).   |
| IEC 61800-7-201 | NOTE Harmonized as EN 61800-7-201:2008 (not modified). |
| IEC 61800-7-202 | NOTE Harmonized as EN 61800-7-202:2008 (not modified). |
| IEC 61800-7-203 | NOTE Harmonized as EN 61800-7-203:2008 (not modified). |
| IEC 61800-7-301 | NOTE Harmonized as EN 61800-7-301:2008 (not modified). |
| IEC 61800-7-302 | NOTE Harmonized as EN 61800-7-302:2008 (not modified). |
| IEC 61800-7-303 | NOTE Harmonized as EN 61800-7-303:2008 (not modified). |

---

## Annex ZA

(normative)

### **Normative references to international publications with their corresponding European publications**

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

| <u>Publication</u> | <u>Year</u>     | <u>Title</u>   | <u>EN/HD</u>   | <u>Year</u>        |
|--------------------|-----------------|--|----------------|--------------------|
| IEC 61158-2        | - <sup>1)</sup> | Industrial communication networks - Fieldbus specifications - Part 2: Physical layer specification and service definition                                  | EN 61158-2     | 2008 <sup>2)</sup> |
| IEC 61158-4-16     | - <sup>1)</sup> | Industrial communication networks - Fieldbus specifications - Part 4-16: Data-link layer protocol specification - Type 16 elements                         | EN 61158-4-16  | 2008               |
| IEC 61158-5-16     | - <sup>1)</sup> | Industrial communication networks - Fieldbus specifications - Part 5-16: Application layer service definition - Type 16 elements                           | EN 61158-5-16  | 2008 <sup>2)</sup> |
| IEC 61158-6-16     | - <sup>1)</sup> | Industrial communication networks - Fieldbus specifications - Part 6-16: Application layer protocol specification - Type 16 elements                       | EN 61158-6-16  | 2008 <sup>2)</sup> |
| IEC 61491          | 2002            | Electrical equipment of industrial machines - Serial data link for real-time communication between controls and drives                                     | -              | -                  |
| IEC 61784-1        | - <sup>1)</sup> | Industrial communication networks - Profiles - Part 1: Fieldbus profiles   | EN 61784-1     | 2008 <sup>2)</sup> |
| IEC 61784-2        | - <sup>1)</sup> | Industrial communication networks - Profiles - Part 2: Additional fieldbus profiles for real-time networks based on ISO/IEC 8802-3                         | EN 61784-2     | 2008 <sup>2)</sup> |
| IEC 61800-7        | Series          | Adjustable speed electrical power drive systems - Part 7: Generic interface and use of profiles for power drive systems                                    | EN 61800-7     | Series             |
| IEC 61800-7-204    | - <sup>1)</sup> | Adjustable speed electrical power drive systems - Part 7-204: Generic interface and use of profiles for power drive systems - Profile type 4 specification | EN 61800-7-204 | 2008 <sup>2)</sup> |

<sup>1)</sup> Undated reference.

<sup>2)</sup> Valid edition at date of issue.

| <u>Publication</u> | <u>Year</u> | <u>Title</u>   | <u>EN/HD</u> | <u>Year</u> |
|--------------------|-------------|--|--------------|-------------|
| ISO/IEC 8802-3     | 2000        | Information technology - Telecommunications - and information exchange between systems - Local and metropolitan area networks - Specific requirements - Part 3: Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications |              | -           |

## CONTENTS

|  |    |
|--|----|
| INTRODUCTION.....  | 8  |
| 1 Scope.....   | 11 |
| 2 Normative references .....                               | 11 |
| 3 Terms, definitions and abbreviated terms .....           | 12 |
| 3.1 Terms and definitions .....                            | 12 |
| 3.2 Abbreviated terms .....                                | 17 |
| 4 General .....  | 17 |
| 5 Mapping to CP16/1 (SERCOS I) and CP16/2 (SERCOS II)..... | 18 |
| 5.1 Reference to communication standards .....             | 18 |
| 5.2 Overview .....   | 18 |
| 5.3 Physical layer and topology.....                       | 20 |
| 5.4 Synchronisation mechanism .....                        | 21 |
| 5.4.1 General .....  | 21 |
| 5.4.2 Handling of command and feedback values .....        | 22 |
| 5.4.3 Position loop with fine interpolator .....           | 23 |
| 5.5 Telegram contents.....                                 | 24 |
| 5.5.1 General .....  | 24 |
| 5.5.2 Data block .....                                     | 25 |
| 5.5.3 Communication function group telegrams .....         | 25 |
| 5.5.4 Standard telegrams .....                             | 26 |
| 5.5.5 Application telegrams .....                          | 28 |
| 5.6 Non-cyclic data transfer.....                          | 29 |
| 5.7 Real-time bits .....                                   | 29 |
| 5.7.1 Functions of Real time bits .....                    | 29 |
| 5.7.2 Allocation of real-time bits .....                   | 30 |
| 5.7.3 Possible cases .....                                 | 31 |
| 5.8 Signal control word and signal status word.....        | 33 |
| 5.9 Data container.....                                    | 34 |
| 5.10 Drive shutdown functions .....                        | 36 |
| 5.11 Communication classes .....                           | 37 |
| 5.11.1 General .....                                       | 37 |
| 5.11.2 Communication class A .....                         | 38 |
| 5.11.3 Communication class B (Extended Functions) .....    | 41 |
| 5.11.4 Communication class C (Additional Functions) .....  | 42 |
| 5.11.5 Communication cycle time granularity.....           | 43 |
| 6 Mapping to CP16/3 (SERCOS III).....                      | 43 |
| 6.1 Reference to communication standards .....             | 43 |
| 6.2 Overview .....   | 43 |
| 6.3 Physical layer and topology.....                       | 45 |
| 6.4 Synchronisation mechanism and telegram content .....   | 46 |
| 6.5 Non-cyclic data transfer.....                          | 47 |
| 6.6 Real-time bits .....                                   | 47 |
| 6.7 Signal control word and signal status word.....        | 47 |
| 6.8 Data container.....                                    | 47 |

|       |   |    |
|-------|---|----|
| 6.9   | Drive shutdown functions .....  | 47 |
| 6.10  | Communication classes .....   | 48 |
| 7     | Mapping to EtherCAT .....   | 48 |
| 7.1   | Reference to communication standards .....  | 48 |
| 7.2   | Overview .....  | 48 |
| 7.3   | SoE Synchronisation .....   | 49 |
| 7.3.1 | General .....   | 49 |
| 7.3.2 | CP16 Phase 0-2 .....  | 50 |
| 7.3.3 | CP16 Phase 3-4 .....  | 50 |
| 7.4   | SoE Application Layer Management .....  | 50 |
| 7.4.1 | EtherCAT State Machine and IEC 61784 CPF 16 State Machine .....                       | 50 |
| 7.4.2 | Multiple Drives .....   | 51 |
| 7.4.3 | IDN Usage .....   | 51 |
| 7.5   | SoE Process Data Mapping .....  | 52 |
| 7.6   | SoE Service Channel Services .....  | 55 |
| 7.6.1 | Overview .....  | 55 |
| 7.6.2 | SSC Read .....  | 55 |
| 7.6.3 | SSC Write .....   | 60 |
| 7.6.4 | SSC Procedure Commands .....  | 64 |
| 7.6.5 | SSC Slave Info .....  | 66 |
| 7.7   | SoE Coding General .....  | 67 |
| 7.8   | SoE Protocol Data Unit Coding .....   | 69 |
| 7.8.1 | SSC Read .....  | 69 |
| 7.8.2 | SSC Write .....   | 72 |
| 7.8.3 | Notify SSC Command Execution Request .....  | 76 |
| 7.8.4 | SSC Slave Info .....  | 77 |
|       | Bibliography .....  | 79 |
|       | Figure 1 – Structure of IEC 61800-7 .....   | 10 |
|       | Figure 2 – Topology .....   | 21 |
|       | Figure 3 – Validity of command values and feedback acquisition time in the PDSs ..... | 22 |
|       | Figure 4 – Synchronisation of cycle times .....                                       | 23 |
|       | Figure 5 – Synchronisation of the control loops and the fine interpolator .....       | 23 |
|       | Figure 6 – AT configuration (example) .....   | 29 |
|       | Figure 7 – Function of the real-time bits .....                                       | 30 |
|       | Figure 8 – Allocation of IDN ≠ 0 to the real-time bits .....                          | 31 |
|       | Figure 9 – Allocation of IDN = 0 to the real-time bits .....                          | 32 |
|       | Figure 10 – Allocation of IDN ≠ 0 to the real-time bits .....                         | 33 |
|       | Figure 11 – Configuration example of signal status word .....                         | 34 |
|       | Figure 12 – Data container configuration without acknowledge (slave) .....            | 35 |
|       | Figure 13 – Data container configuration with acknowledge (slave) .....               | 36 |
|       | Figure 14 – Structure of Communication classes .....                                  | 37 |
|       | Figure 15 – Topology .....  | 45 |
|       | Figure 16 – Telegram sequence .....   | 46 |
|       | Figure 17 – General communication cycle .....   | 47 |

|   |    |
|---|----|
| Figure 18 – ESM and IEC 61158-4-16 State Machine .....                  | 51 |
| Figure 19 – Successful SSC Read sequence .....                          | 56 |
| Figure 20 – Unsuccessful SSC Read sequence .....                        | 56 |
| Figure 21 – Successful SSC Fragmented Read sequence.....                | 57 |
| Figure 22 – Successful SSC Write sequence .....                         | 60 |
| Figure 23 – Unsuccessful SSC Write sequence .....                       | 61 |
| Figure 24 – Successful SSC Fragmented Write sequence.....               | 61 |
| Figure 25 – Successful SSC Procedure Command sequence.....              | 64 |
| Figure 26 – Aborted SSC Procedure Command sequence .....                | 65 |
| Figure 27 – Slave Info sequence.....                                    | 66 |
| <br>Table 1 – CP16/1 and CP16/2 feature summary.....                    | 18 |
| Table 2 – Number of PDSs per network (examples) .....                   | 19 |
| Table 3 – Communication Profile Interoperability within a network ..... | 20 |
| Table 4 – Typical operation data for cyclic transmission.....           | 24 |
| Table 5 – Typical data for non-cyclic transmission .....                | 25 |
| Table 6 – IDN for choice and parameterisation of telegrams .....        | 26 |
| Table 7 – Structure of standard telegram-0 .....                        | 26 |
| Table 8 – Structure of standard telegram-1 .....                        | 26 |
| Table 9 – Structure of standard telegram-2 .....                        | 26 |
| Table 10 – Structure of standard telegram-3 .....                       | 27 |
| Table 11 – Structure of standard telegram-4 .....                       | 27 |
| Table 12 – Structure of standard telegram-5 .....                       | 27 |
| Table 13 – Structure of standard telegram-6 .....                       | 28 |
| Table 14 – IDN for configuration of MDT .....                           | 28 |
| Table 15 – IDN for configuration of AT .....                            | 28 |
| Table 16 – IDN for real-time bits .....                                 | 29 |
| Table 17 – Real-time bits assignment IDNs.....                          | 30 |
| Table 18 – IDN for configuring control and status words .....           | 33 |
| Table 19 – Data containers IDN .....                                    | 34 |
| Table 20 – Ring configuration – Timing .....                            | 38 |
| Table 21 – Ring configuration – Telegram configuration.....             | 39 |
| Table 22 – Ring configuration – Phase run-up .....                      | 39 |
| Table 23 – Service channel protocol .....                               | 39 |
| Table 24 – Information & diagnostics .....                              | 40 |
| Table 25 – Communication class A settings .....                         | 40 |
| Table 26 – Ring configuration – Telegram configuration.....             | 41 |
| Table 27 – Information & diagnostics .....                              | 41 |
| Table 28 – Real-time control bits .....                                 | 41 |
| Table 29 – Real-time status bits.....                                   | 42 |
| Table 30 – Communication class B settings .....                         | 42 |
| Table 31 – CP16/3 features summary .....                                | 44 |
| Table 32 – Number of PDSs per network (examples) .....                  | 45 |

|  |    |
|--|----|
| Table 33 – Synchronisation performance classes.....          | 47 |
| Table 34 – EtherCAT feature summary .....                    | 49 |
| Table 35 – Number of PDSs per network (examples).....        | 49 |
| Table 36 – Obsolete IDNs.....                                | 52 |
| Table 37 – Changed IDNs.....                                 | 52 |
| Table 38 – Status word of drive .....                        | 53 |
| Table 39 – Control word for drive .....                      | 54 |
| Table 40 – Mapping of SSC services to EtherCAT services..... | 55 |
| Table 41 – SSC Read Service.....                             | 58 |
| Table 42 – Read SSC Fragment Service .....                   | 59 |
| Table 43 – SSC Write Service.....                            | 62 |
| Table 44 – Write SSC Fragment Service .....                  | 63 |
| Table 45 – Notify SSC Command Execution Service.....         | 65 |
| Table 46 – SSC Slave Info Service .....                      | 67 |
| Table 47 – SoE Mailbox Protocol .....                        | 68 |
| Table 48 – SSC Read Request .....                            | 69 |
| Table 49 – SSC Read Response.....                            | 70 |
| Table 50 – Read SSC Fragment Request.....                    | 72 |
| Table 51 – SSC Write Request .....                           | 73 |
| Table 52 – SSC Write Response.....                           | 74 |
| Table 53 – Write SSC Fragment Request.....                   | 76 |
| Table 54 – Notify SSC Command Execution Request.....         | 77 |
| Table 55 – Slave Info Request .....                          | 78 |

## INTRODUCTION

The IEC 61800 series is intended to provide a common set of specifications for adjustable speed electrical power drive systems.

IEC 61800-7 describes a generic interface between control systems and power drive systems. This interface can be embedded in the control system. The control system itself can also be located in the drive (sometimes known as "smart drive" or "intelligent drive").

A variety of physical interfaces is available (analogue and digital inputs and outputs, serial and parallel interfaces, fieldbuses and networks). Profiles based on specific physical interfaces are already defined for some application areas (e.g. motion control) and some device classes (e.g. standard drives, positioner). The implementations of the associated drivers and application programmers interfaces are proprietary and vary widely.

IEC 61800-7 defines a set of common drive control functions, parameters, and state machines or description of sequences of operation to be mapped to the drive profiles.

IEC 61800-7 provides a way to access functions and data of a drive that is independent of the used drive profile and communication interface. The objective is a common drive model with generic functions and objects suitable to be mapped on different communication interfaces. This makes it possible to provide common implementations of motion control (or velocity control or drive control applications) in controllers without any specific knowledge of the drive implementation.

There are several reasons to define a generic interface:

### **For a drive device manufacturer**

- Less effort to support system integrators
- Less effort to describe drive functions because of common terminology
- The selection of drives does not depend on availability of specific support

### **For a control device manufacturer**

- No influence of bus technology
- Easy device integration
- Independent of a drive supplier

### **For a system integrator**

- Less integration effort for devices
- Only one understandable way of modeling
- Independent of bus technology

Much effort is needed to design a motion control application with several different drives and a specific control system. The tasks to implement the system software and to understand the functional description of the individual components may exhaust the project resources. In some cases, the drives do not share the same physical interface. Some control devices just support a single interface which will not be supported by a specific drive. On the other hand, the functions and data structures are often specified with incompatibilities. This requires the system integrator to write special interfaces for the application software and this should not be his responsibility.

Some applications need device exchangeability or integration of new devices in an existing configuration. They are faced with different incompatible solutions. The efforts to adopt a solution to a drive profile and to manufacturer specific extensions may be unacceptable. This will reduce the degree of freedom to select a device best suited for this application to the selection of the unit which will be available for a specific physical interface and supported by the controller.

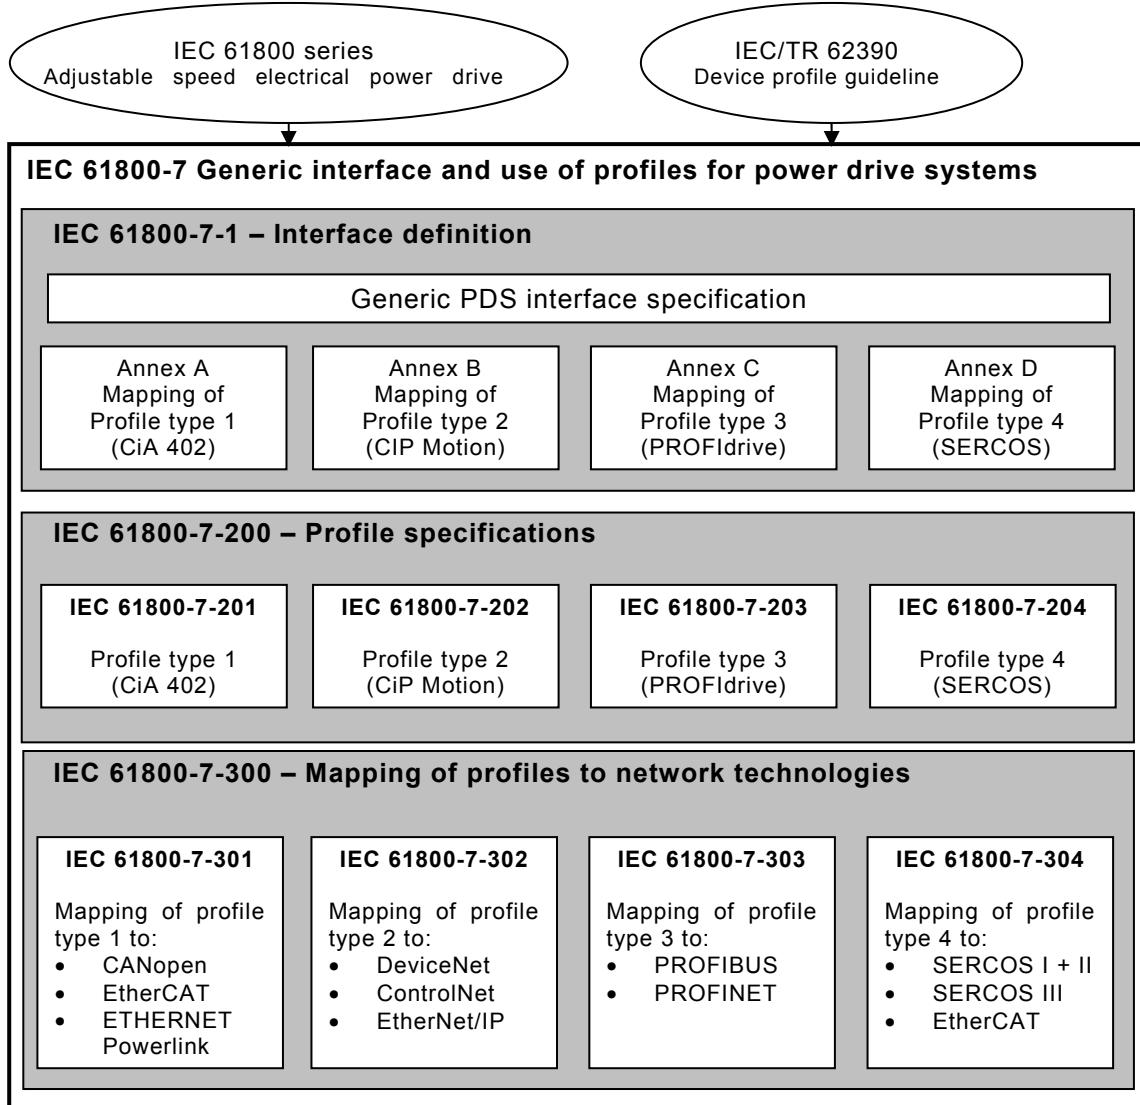
IEC 61800-7-1 is divided into a generic part and several annexes as shown in Figure 1. The drive profile types for CiA 402<sup>1</sup>, CIP Motion<sup>TM2</sup>, PROFIdrive<sup>3</sup> and SERCOS interface<sup>TM4</sup> are mapped to the generic interface in the corresponding annex. The annexes have been submitted by open international network or fieldbus organizations which are responsible for the content of the related annex and use of the related trademarks.

The different profile types 1, 2, 3 and 4 are specified in IEC 61800-7-201, IEC 61800-7-202, IEC 61800-7-203 and IEC 61800-7-204.

This part of IEC 61800-7 specifies how the profile type 4 (SERCOS<sup>TM</sup>) is mapped to the network technologies SERCOS I, II, III and EtherCAT<sup>TM5</sup>.

IEC 61800-7-301, IEC 61800-7-302 and IEC 61800-7-303 specify how the profile types 1, 2 and 3 are mapped to different network technologies (such as CANopen<sup>6</sup>, EtherCAT<sup>TM</sup>, Ethernet Powerlink<sup>TM7</sup>, DeviceNet<sup>TM8</sup>, ControlNet<sup>TM9</sup>, EtherNet/IP<sup>TM10</sup>, PROFIBUS<sup>11</sup> and PROFINET<sup>12</sup>).

- 
- 1 CiA 402 is a trade name of CAN in Automation, e.V. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name CiA 402.
  - 2 CIP Motion<sup>TM</sup> is a trade name of Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name CIP Motion<sup>TM</sup>. Use of the trade name CIP Motion<sup>TM</sup> requires permission of Open DeviceNet Vendor Association, Inc.
  - 3 PROFIdrive is a trade name of PROFIBUS International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFIdrive. Use of the trade name PROFIdrive requires permission of PROFIBUS International.
  - 4 SERCOS<sup>TM</sup> and SERCOS interface<sup>TM</sup> are trade names of SERCOS International e.V. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade names SERCOS or SERCOS interface. Use of the trade names SERCOS and SERCOS interface requires permission of the trade name holder.
  - 5 EtherCAT<sup>TM</sup> is a trade name of Beckhoff, Verl. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name EtherCAT<sup>TM</sup>. Use of the trade name EtherCAT<sup>TM</sup> requires permission of the trade name holder.
  - 6 CANopen is an acronym for Controller Area Network *open* and is used to refer to EN 50325-4.
  - 7 Ethernet Powerlink<sup>TM</sup> is a trade name of B&R, control of trade name use is given to the non profit organization EPSG. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name Ethernet Powerlink<sup>TM</sup>. Use of the trade name Ethernet Powerlink<sup>TM</sup> requires permission of the trade name holder.
  - 8 DeviceNet<sup>TM</sup> is a trade name of Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name DeviceNet<sup>TM</sup>. Use of the trade name DeviceNet<sup>TM</sup> requires permission of Open DeviceNet Vendor Association, Inc.
  - 9 ControlNet<sup>TM</sup> is a trade name of ControlNet International, Ltd. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name ControlNet<sup>TM</sup>. Use of the trade name ControlNet<sup>TM</sup> requires permission of ControlNet International, Ltd.
  - 10 EtherNet/IP<sup>TM</sup> is a trade name of ControlNet International, Ltd. and Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name EtherNet/IP<sup>TM</sup>. Use of the trade name EtherNet/IP<sup>TM</sup> requires permission of either ControlNet International, Ltd. or Open DeviceNet Vendor Association, Inc.
  - 11 PROFIBUS is a trade name of PROFIBUS International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFIBUS. Use of the trade name PROFIBUS requires permission of PROFIBUS International.
  - 12 PROFINET is a trade name of PROFIBUS International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFINET. Use of the trade name PROFINET requires permission of PROFIBUS International.

**Figure 1 – Structure of IEC 61800-7**

**ADJUSTABLE SPEED ELECTRICAL POWER DRIVE SYSTEMS –****Part 7-304: Generic interface and use  
of profiles for power drive systems –  
Mapping of profile type 4 to network technologies****1 Scope**

IEC 61800-7 specifies profiles for Power Drive Systems (PDS) and their mapping to existing communication systems by use of a generic interface model.

The functions specified in this part of IEC 61800-7 are not intended to ensure functional safety. This requires additional measures according to the relevant standards, agreements and laws.

This part of IEC 61800-7 specifies the mapping of the profile type 4 (SERCOS) specified in IEC 61800-7-204 onto different network technologies.

- SERCOS I / II, see Clause 5,
- SERCOS III, see Clause 6,
- EtherCAT, see Clause 7.

**2 Normative references**

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61158-2, *Industrial communication networks – Fieldbus specifications – Part 2: Physical layer specification and service definition*

IEC 61158-4-16, *Industrial communication networks – Fieldbus specifications – Part 4-16: Data-link layer protocol specification – Type 16 elements*

IEC 61158-5-16, *Industrial communication networks – Fieldbus specifications – Part 5-16: Application layer service definition – Type 16 elements*

IEC 61158-6-16, *Industrial communication networks – Fieldbus specifications – Part 6-16: Application layer protocol specification – Type 16 elements*

IEC 61491:2002, *Electrical equipment of industrial machines – Serial data link for real-time communication between controls and drives*

IEC 61784-1, *Industrial communication networks – Profiles – Part 1: Fieldbus profiles*

IEC 61784-2, *Industrial communication networks – Profiles – Part 2: Additional fieldbus profiles for real-time networks based on ISO/IEC 8802-3*

IEC 61800-7 (all parts), *Adjustable speed electrical power drive systems – Generic interface and use of profiles for power drive systems*